

FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____



HLV96-SLIM

96 WATT-24 VOLT | CLASS 2 POWER SUPPLY



Description

Illuminate indoor spaces with confidence using the HLV96-SLIM, a slim, versatile 96W constant voltage LED power supply designed to adapt seamlessly to various dimming systems. Ensuring reliable operation with built-in protective measures, this power supply embraces a robust design for efficient performance. UL-listed as Class 2 and suitable for Dry, Damp and Wet locations, it offers a reliable and adaptable solution for your indoor/outdoor lighting needs.


Features

- Flicker-free Dimming Down to ≤1%
- TRIAC, ELV, MLV, or 1-10V Dimming
- Protections: Short Circuit/Over Current/Over Voltage
- Free Air Convection Cooling
- Suitable for Dry/Damp/Wet Location
- UL-listed Class 2

Specifications

Series	HLV96-SLIM
Input Voltage	100-277V AC
Output Voltage	24V DC / Constant Voltage
Max Wattage	96W
Temp Range	-20°F(-29°C) – 158°F (70°C)
Dimensions	13.02" × 1.26" × 0.91"
Classification	Class 2

Dimensions

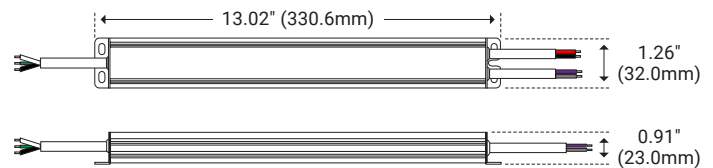

Series List

Model Name	Rated Input Voltage	Rated Output Power	Rated Output Voltage	Output Current	Note
HLV96-SLIM	100-277V AC	96W	24V	0-4000mA	3 in 1 Dimming




I Series Data

Model		HLV96-SLIM	
Output	DC Voltage	24V	
	Voltage Tolerance	±0.5V	
	Voltage Regulation	±0.5%	
	Rated Current	4.0A	
	Rated Power	96W	
	Load Regulation	±1%	
Input	Voltage Range	100-277VAC	
	Frequency Range	47 - 63Hz	
	Power Factor (Typ.) @ full load	0.99 @ 120VAC	0.98 @ 277VAC
	THD (Typ.) @ full load	<10% @ 120VAC	<15% @ 277VAC
	Efficiency (Typ.) @ full load	85% @ 120VAC	88% @ 277VAC
	AC Current (Max.)	1.3A	
	Inrush Current (Typ)	11A ,1.04ms@120VAC 27A ,960us@277V AC	
	Leakage Current	<0.5mA	
Protection	Short Circuit	Shut down o/p voltage, re-power on to recover after fault condition removed	
	Over Loading	≤120% Hiccup mode, recovers automatically after fault condition is removed	
	Over Temperature	212°F±18°F shut down o/p voltage, automatically recover after cooling	
Environment	Working Temperature	40°~+140°F	
	Working Humidity	20 – 95% RH, non-condensing	
	Storage Temperature Humidity	-40~+176°F, 10 – 95% RH	
	Temperature Coefficient	±0.054%/°F (0 – 122°F)	
	Vibration	10~500Hz, 5G 12min/1 cycle, period for 72min each along X, Y, Z axes	
Safety & EMC	Safety Standards	UL8750 + UL1310, class 2 CAN/CSA-C22.2 No. 250.13	
	Withstand Voltage	I/P-O/P: 1.88KVAC	
	Isolation Resistance	I/P-O/P: 100MΩ / 500VDC / 77°F / 70% RH	
	EMC Emission	FCC 47 CFR Part 15, Subpart B	
Other	Net Weight	1.04lbs (0.47Kg)	
	Size	13.016" × 1.260" × 0.906" (330.6mm × 32mm × 23mm)	
Notes	<p>1. All parameters if NOT specially mentioned are measured at 120VAC input, rated load and 77°F of ambient temperature.</p> <p>2. Tolerance: includes set up tolerance, line regulation and load regulation.</p> <p>3. The power supply is considered as a component that will be operated in combination with final Equipment. Since EMC performance will be affected by the complete installation, the final equipment manufactures must be-qualify EMC Directive on the complete installation again.</p>		




Charts


Dimming Curve (Full)

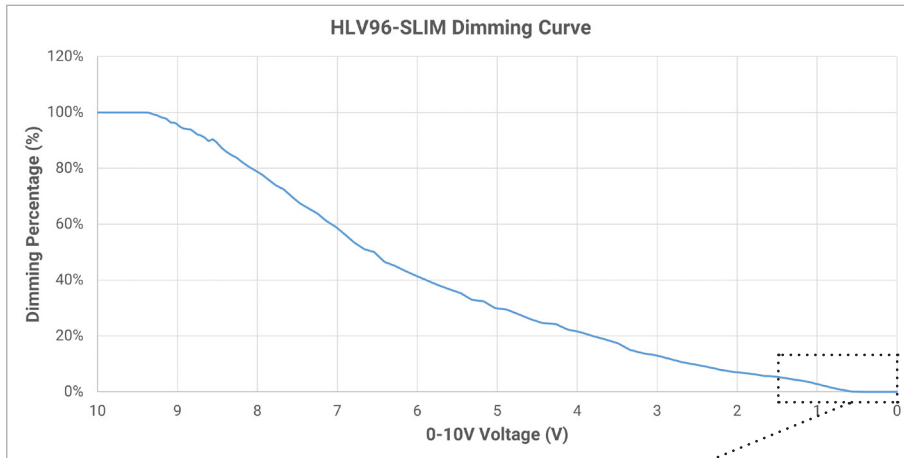

Dimming Curve (Exploded)

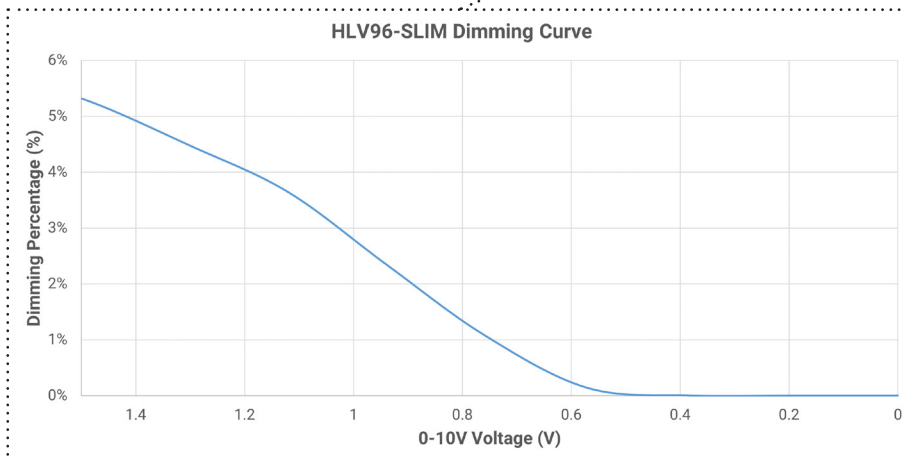


Derating Curve

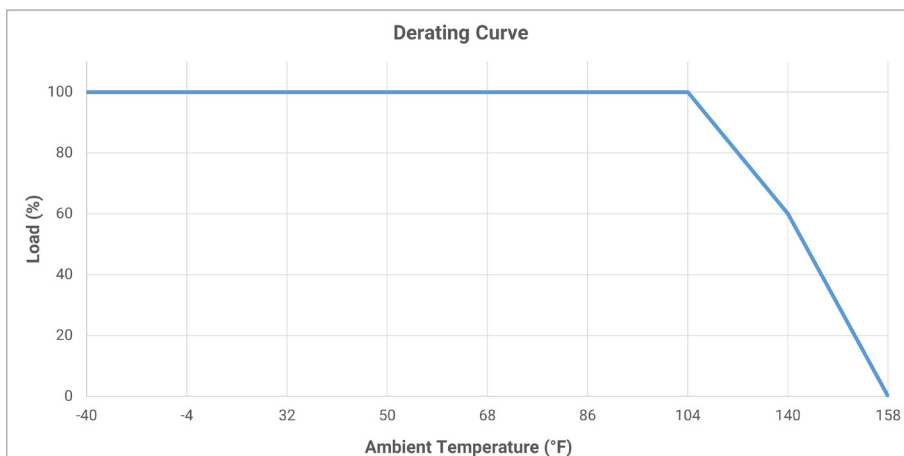




I Wiring Diagram

Phase Dimming (120V Only)

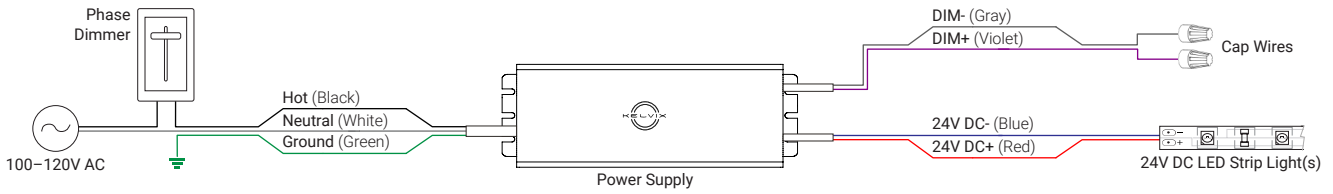

0-10V Dimming

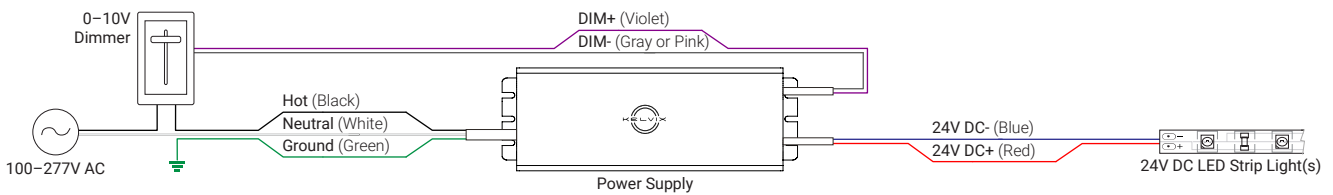

DMX Control

