

FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____



CH-0003

TRIMLESS & MUD-IN CHANNEL

Create perfectly flush, seamless lines of light without modifying the structure behind the sheet rock.




I Features

- Available In 78.74" (2m) Sections
- Extruded Aluminum Construction
- Anodized Matte Finish
- Straight and Angled Connectors Available to Create Long, Continuous Runs
- Drywall Mud-in Mounting for a Seamless Recessed Look
- Consult Factory for Custom Lengths and Finishes
- Available In Various Finish Colors

I Dimensions

Length	78.74" (2m)
Width (External)	2.42" (64.5mm)
Width (Internal)	0.81" (20.7mm)
Height	0.55" (14mm)

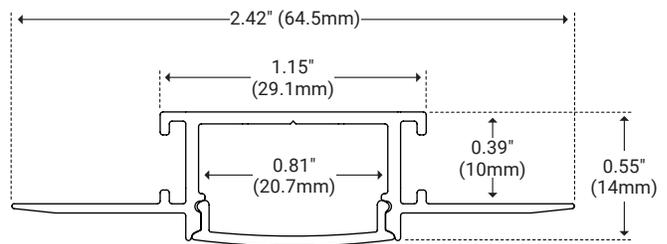

I Ordering Code Builder

Series	Length	Lens	End Caps
CH0003	2		EC
CH0003 – CH-0003	2 – 2 Meters	WH – White WHC – White Continuous BK – Black	EC – End Cap Pair

Example: CH0003-2-WH-EC



I Lens



White Lens

Unit Number	CH-LNS-AC-WH-2M	Ordering Code WH
Dimension	L 78.74" (2m) W 0.86" (22mm)	H 0.20" (5mm)
Light transmission	51%	



White Lens Continuous

Unit Number	CH-LNS-AC-WH-CO	Ordering Code WHC
Dimension	L Varies W 0.86" (22mm)	H 0.20" (5mm)
Light Transmission	51%	



Black Lens

Unit Number	CH-LNS-AC-BK-2M	Ordering Code BK
Dimension	L 78.74" (2m) W 0.86" (22mm)	H 0.20" (5mm)
Light transmission	19%	



Disposable Cover

Unit Number	CH-LNS-AC-DISP-2M	INCLUDED
Dimension	L 78.74" (2m) W 0.86" (22mm)	H 0.20" (5mm)
Description	Used to protect interior LED area during installation.	

I End Cap



End Cap Pair

Unit Number	CH-EC-0003	Ordering Code EC
Dimension	L 0.25" (6.5mm) W 1.14" (29mm)	H 0.55" (14mm)

I Optional Accessories

Product	Unit Number	Description
Straight Connector	CH-CON-02-180	Secure two pieces of channel together to form a continuous run of light.
90° Connector Horizontal	CH-CON-03-90H	Secure two pieces of channel together to form a 90° horizontal corner.
90° Connector Vertical	CH-CON-02-90V	Secure two pieces of channel together to form a 90° vertical corner.
120° Connector Horizontal	CH-CON-02-120H	Secure two pieces of channel together to form a 120° horizontal corner.

To ensure stability, we recommend utilizing two connectors per channel junction for use in both of the exterior connector slots.

