

FIXTURE TYPE \_\_\_\_\_

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_



# SLV192

192 WATT (2 × 96W) – 24 VOLT | NON DIM |  
CLASS 2 POWER SUPPLY



## Description

The SLV192 is a robust 2 x 96W non-dimming LED power supply designed for digital pixel (SPI) controlled lighting applications. Its efficiency maximizes power usage, positioning it as an excellent solution for scenarios where precision and energy conservation take precedence. The SLV192 seamlessly integrates with Kelvix digital pixel-controlled products, offering the capability to power a diverse range of creative installations and shows.


## Features

- Non-Dimmable Driver
- Compatible with Color Changing and Pixel Systems
- Overload Protection/Auto Reset Short Circuit Protection
- Free Air Convection Cooling
- Suitable for Dry/Damp Location
- UL-Listed Class 2

## Specifications

Series	SLV192
Input Voltage	100–277V AC
Output Voltage	24V DC / Constant Voltage
Max Wattage	192W (2 × 96W)
Temp Range	-20°F(-29°C) – 158°F (70°C)
Dimensions	17.83" × 3.42" × 2.36"
Classification	Class 2

## Dimensions

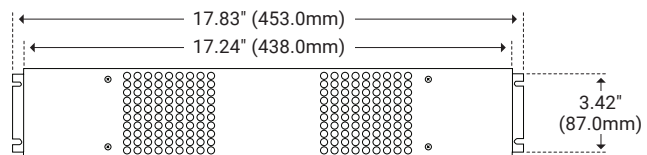

## Series List

Model Name	Rated Input Voltage	Rated Output Power	Rated Output Voltage	Output Current	Note
SLV192	100-277V AC	192W	24V	0-4000mA	Non-Dimming




## I Series Data

Model		SLV192	
Certificates		UL cUL FCC Class 2	
Output	DC Voltage	24V	
	Rated Current	2×4A	
	Rated Power	192W (2×96W)	
	Voltage Tolerance	±0.5V	
	Voltage Regulation	±0.5%	
	Load Regulation	±1%	
Input	Voltage Range	100-277VAC	
	Frequency Range	47-63Hz	
	Power Factor (Typ.) @ full load	0.99 @ 120VAC	
	THD (Typ.) @ full load	<20% @ 120VAC	
	Efficiency (Typ.) @ full load	88% @ 120VAC	
	AC Current (Max.)	2.3A	
	Inrush Current (Typ)	19A, 50%, 1.3ms @ 120VAC	
	Leakage Current	<0.50mA	
Protection	Short Circuit	Shut down o/p voltage, re-power on to recover after fault condition is removed	
	Over Loading	≤120% constant current limiting, auto-recovery	
	Over Temperature	212°F±18°F shut down o/p voltage, automatically recover after cooling	
Environment	Working Temperature	-40°~+140°F	
	Working Humidity	20~90% RH, non-condensing	
	Storage Temperature Humidity	-40~+176°F, 10~95% RH	
	Temperature Coefficient	±0.054%/°F (0-122°F)	
	Vibration	10~500Hz, 5G 10min/1 cycle, period for 60min each along X, Y, Z axes	
Safety & EMC	Safety Standards	UL8750 + UL1310	
	Withstand Voltage	I/P-O/P: 1.88KVAC	
	Isolation Resistance	I/P-O/P: 100MΩ / 500VDC / 77°F / 70% RH	
	EMC Emission	FCC Part 15B	
Others	Net Weight	3.75lbs (1.7Kg)	With junction box: 5.29lbs (2.4Kg)
	Size	17.85" × 3.42" × 2.36" (453mm × 87mm × 60mm)	
Notes	<p>1. All parameters if NOT specially mentioned are measured at 120VAC input, rated load and 77°F of ambient temperature.</p> <p>2. To extend the driver's using life, please reduce the loading at lower input voltage.</p>		



## I Charts

Derating Curve

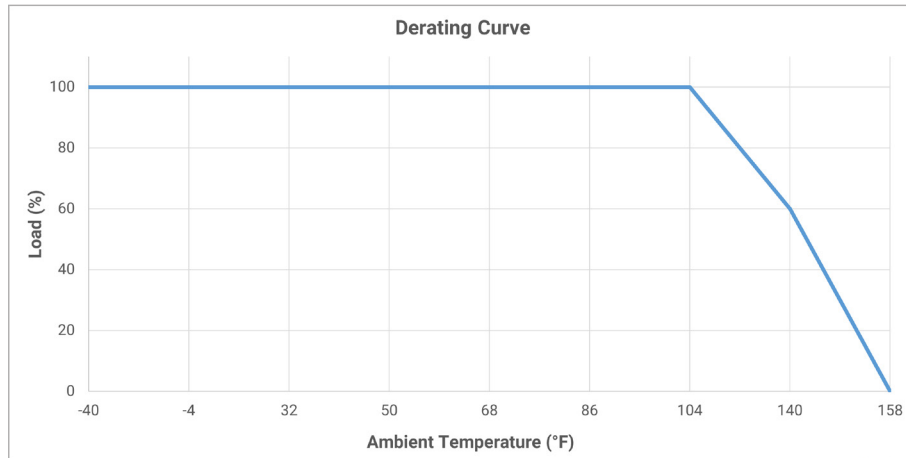



# I Wiring Diagram

## Secondary Side Dimming (DMX)

