

FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____



Uniform Dim to Warm (Outdoor)

INCANDESCENT-LIKE OUTDOOR TAPE



I Description

Our Uniform series provides single bin color consistency across every single output option. Uniform Dim to Warm replicates a incandescent dimming curve by shifting to a warmer CCT at its low levels.

I Features

- Uses U2835 Diode
- Create a Custom Fixture with Kelvix Channels
- 5-Year Warranty
- UL-Listed for Indoor and Outdoor
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies
- Dimmable using Kelvix Power Supplies
- IP67
- Offered 3-step SDCM

I Series Spec

Series	UNIX-DW
Temp/Colors*	1800K-3000K
Input Voltage	24V DC/Constant Voltage
Beam Spread	120°
CRI	Ra 90+
SDCM	3-Step
Diode	2835
Diode Pitch	168 LED/m
Cut Intervals	2.81" (71.4mm)
Dimensions	0.57" (14.5mm) × 0.17" (4.5mm)
Dimensions w/End Caps	0.69" (17.5mm) × 0.23" (6.0mm)
Operating Temp.	-4°F (-20°C) to 140°F (60°C)
Storage Temp.	-4°F (-20°C) to 158°F (70°C)

I Product Code Builder

Series	Location	Output*	Temp/Color*	Voltage	Modification
UNI3-DW	O		1830K	24V	NA
UNI3-DW —Uniform Dim to Warm 3-Step	O —Outdoor	100 —100 lm/ft 300 —300 lm/ft 600 —600 lm/ft	1830K —1800K-3000K	24V —24V DC	NA —None

Example: UNI3-DW-O-100-1830K-24V-NA

* Customizable—Consult Factory

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 NO. 250.0




I Series Data

Output (lm/ft)	UNI3-DW 100	UNI3-DW 300	UNI3-DW 600
Lumens (per ft)	113	349	663
Wattage ¹ (per ft)	1.4	3.2	5.7
Efficiency (lm/W)	68	90	102
Max Run Length (ft)	47	30	20

¹Power consumption based on average wattage per foot. Refer to Power Chart on page 3 for details.

I Dimensions

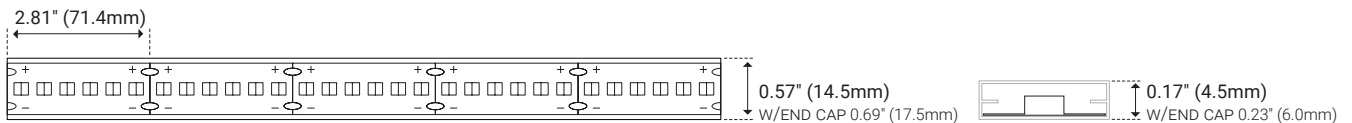


I Power Feed Accessories*

Lead



Unit Number	Length
FML-2C-1	12.00" (305.0mm)
FML-2C-2	24.00" (0.60m)
FML-2C-3	36.00" (0.91m)
FML-2C-6	72.00" (1.82m)
FML-2C-12	144.00" (3.65m)
FML-2C-15	180.00" (4.57m)
FML-2C-20	240.00" (6.09m)




For leads on both input and output, specify 2x FML-xC-xx per run.

Lead with DC Plug




Unit Number	Length
FML-2C-DC-1-M	12.00" (305.0mm)
FML-2C-DC-1-F	12.00" (305.0mm)
FML-2C-DC-6-M	72.00" (1.82m)
FML-2C-DC-6-F	72.00" (1.82m)
FML-2C-DC-10-M	120.00" (3.04m)
FML-2C-DC-10-F	120.00" (3.04m)



Connector



Unit Number	Length
FMC-2C-1.5I	1.50" (38.0mm)
FMC-2C-3I	3.00" (76.0mm)
FMC-2C-6I	6.00" (152.0mm)
FMC-2C-9I	9.00" (228.0mm)
FMC-2C-1	12.00" (305.0mm)
FMC-2C-2	24.00" (0.60m)






I Power Chart

		UNI3-DW-100	UNI3-DW-300	UNI3-DW-600
Watts	1 ft	1.6	3.7	6.6
	2 ft	3.2	7.4	13
	3 ft	4.6	11	19.3
	4 ft	6.1	14.5	25.3
	5 ft	7.8	17.9	31.1
	6 ft	9.3	21.3	36.7
	7 ft	10.8	24.6	42.1
	8 ft	12.3	27.9	47.3
	9 ft	13.8	31	52.4
	10 ft	15.2	34.1	57.2
	11 ft	16.6	37.1	61.8
	12 ft	18.1	40.1	66.2
	13 ft	19.5	42.9	70.4
	14 ft	20.9	45.7	74.4
	15 ft	22.3	48.5	78.2
	16 ft	23.7	51.1	81.8
	17 ft	25	53.7	85.3
	18 ft	26.3	56.2	88.5
	19 ft	27.6	58.7	91.5
	20 ft	29	61.1	94.3
	21 ft	30.3	63.4	-
	22 ft	31.5	65.6	-
	23 ft	32.8	67.8	-
	24 ft	34	69.8	-
	25 ft	35.3	71.9	-
	26 ft	36.5	73.8	-
	27 ft	37.7	75.7	-
	28 ft	38.8	77.5	-
	29 ft	40	79.2	-
	30 ft	41.2	80.9	-
	31 ft	42.3	-	-
	32 ft	43.4	-	-
	33 ft	44.5	-	-
	34 ft	45.6	-	-
	35 ft	46.7	-	-
	36 ft	47.7	-	-
	37 ft	48.8	-	-
	38 ft	49.8	-	-
	39 ft	50.8	-	-
	40 ft	51.8	-	-
	41 ft	52.8	-	-
	42 ft	53.8	-	-
	43 ft	54.7	-	-
	44 ft	55.7	-	-
	45 ft	56.6	-	-
	46 ft	57.5	-	-
	47 ft	58.4	-	-




I Colorimetric Details (3000K)

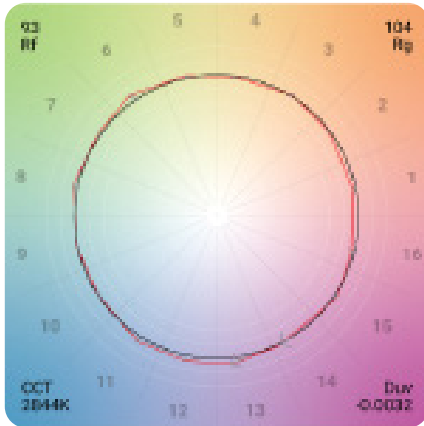

I Photometric Details (3000K)

UNI3-DW 300

Mtg Height	Light Level	Beam Diameter
1.00 ft	121.17 fc	3.18 ft
2.00 ft	30.29 fc	6.37 ft
3.00 ft	13.46 fc	9.55 ft
4.00 ft	7.57 fc	12.74 ft
5.00 ft	4.85 fc	15.92 ft
6.00 ft	3.37 fc	19.11 ft
8.00 ft	1.89 fc	25.48 ft
10.00 ft	1.21 fc	31.85 ft
12.00 ft	0.84 fc	38.22 ft
15.00 ft	0.54 fc	47.77 ft

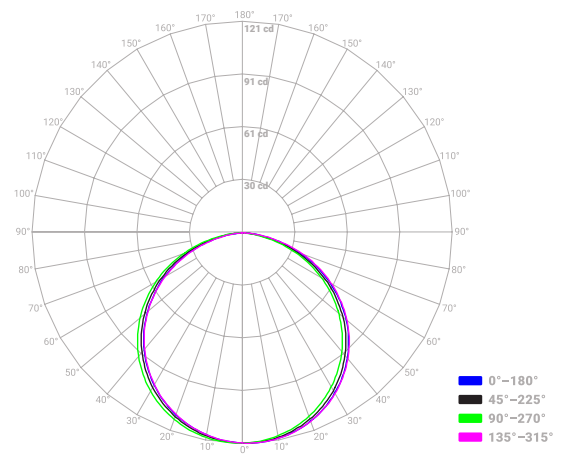

UNI3-DW 600

Mtg Height	Light Level	Beam Diameter
1.00 ft	360.45 fc	3.18 ft
2.00 ft	90.11 fc	6.35 ft
3.00 ft	40.05 fc	9.53 ft
4.00 ft	22.53 fc	12.71 ft
5.00 ft	14.42 fc	15.89 ft
6.00 ft	10.01 fc	19.06 ft
8.00 ft	5.63 fc	25.42 ft
10.00 ft	3.60 fc	31.77 ft
12.00 ft	2.50 fc	38.13 ft
15.00 ft	1.60 fc	47.66 ft

