


FIXTURE TYPE \_\_\_\_\_

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_

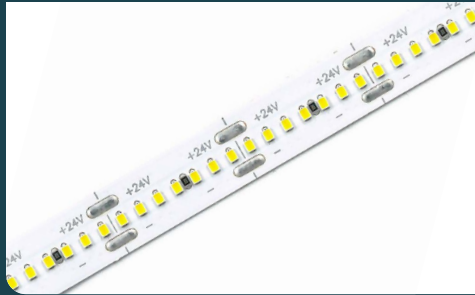

# Direct View 700 (Outdoor)

RUBBER-COATED LINEAR LED



## I Description

Direct View 700 is an amazing advancement in linear LED technology. Even in the smallest micro-channels it delivers smooth, even illumination without diode imaging. At around 700lm/ft, Direct View 700 Series is a fantastic light engine for a variety of aluminum channels, allowing the creation of nearly limitless fixture designs.


## I Features

- Supports Title 24 JA8-2019 Compliance
- Suitable for Most Direct View Applications
- Dimmable
- 50,000 Hour Life
- UL-Listed for Indoor and Outdoor Use
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

## I Series Spec

Series	DV
Color/Temp	2700K–5000K
Dimming Protocol	PWM, TRIAC, 0-10V, DMX 512
Indoor/Outdoor	Indoor & Outdoor
Input Voltage	24V DC
Watts per Foot	5.3W
Beam Angle	120°
Max Run Length	15ft
CRI	90+
Operating Temp.	-40°F (-40°C) to 149°F (65°C)
Cut Intervals	1.00" (25.0mm)
Tape Width	0.52" (13.2mm)
Tape Height	0.24" (6.0mm)
End Cap Width	0.56" (14.2mm)
End Cap Height	0.32" (9.0mm)
Diode	2016
Field Cuttable	No
IP Rating	IP67

## I Product Code Builder

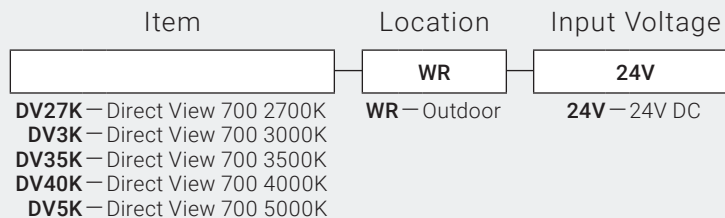

Example: DV27K-WR-24V


Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 NO. 250.0



## I Series Data

	DV27K	DV3K	DV35K	DV40K	DV5K
Kelvin	2700K	3000K	3500K	4000K	5000K
Lumens (lm/ft)	658	670	690	704	723

## I Dimensions

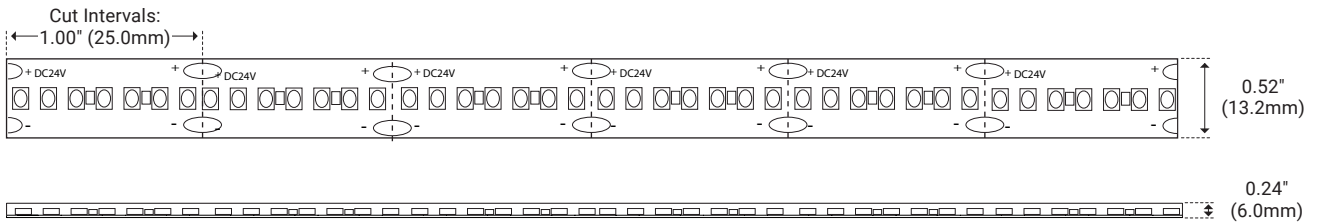

## I Power Chart

		DV-700
Watts	1 ft	7.7
	2 ft	15.1
	3 ft	22.3
	4 ft	29.5
	5 ft	35.8
	6 ft	41.9
	7 ft	47.2
	8 ft	52.4
	9 ft	57.8
	10 ft	62.7
	11 ft	66.1
	12 ft	70
	13 ft	73.3
	14 ft	76.7
15 ft	80.1	