



# BrightLinx 60° Bracket

## Installation Instructions

### ⚠ SAFETY PRECAUTIONS


Products should be installed and serviced by a qualified, licensed electrician in accordance with applicable local and national electrical safety codes.

Never use currents or voltages that are not compatible.

Never install within 10 ft or less from the nearest edge of a pool, spa, fountain, or similar location.

Never modify or take apart Kelvix components beyond instructions or the warranty will be void.


- 1 | Position the fixture and mark the screw hole locations (recommend 2 brackets per 3 ft of product). Once the holes have been marked, pre-drill as needed.

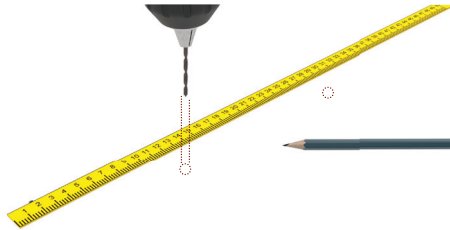


- 2 | Screw bracket into pre-drilled holes using M3 screws.



- 3 | Snap fixture into adjustable bracket.

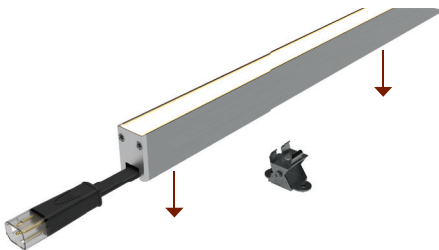

- 4 | Position fixture in desired angle.

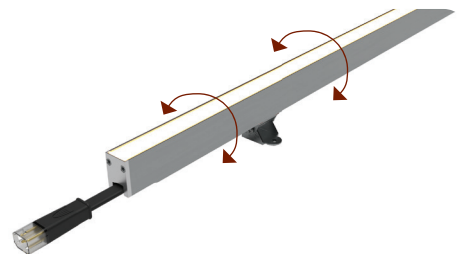

- 5 | Tighten center screw to lock your mounting angle into place.

