



# BrightLinx Recessed Channel

## Installation Instructions

### ⚠ SAFETY PRECAUTIONS


Products should be installed and serviced by a qualified, licensed electrician in accordance with applicable local and national electrical safety codes.

Never use currents or voltages that are not compatible.


Never install within 10 ft or less from the nearest edge of a pool, spa, fountain, or similar location.

Never modify or take apart Kelvix components beyond instructions or the warranty will be void.


- 1 | Cut recessed opening in mounting surface that matches the width of the BrightLinx channel.

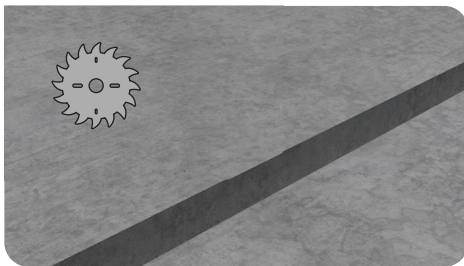


- 2 | Prepare channel mounting using screws, epoxy, or more concrete.

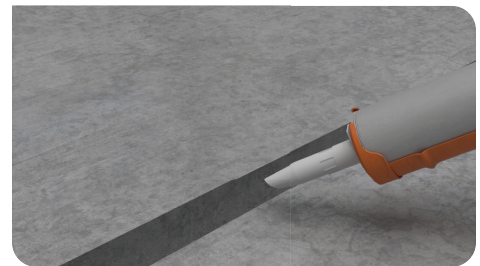

- 3 | Mount channel into mounting surface

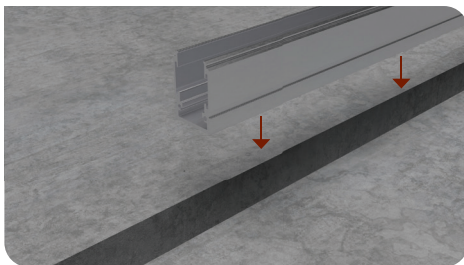

- 4 | Press fit BrightLinx into the channel.

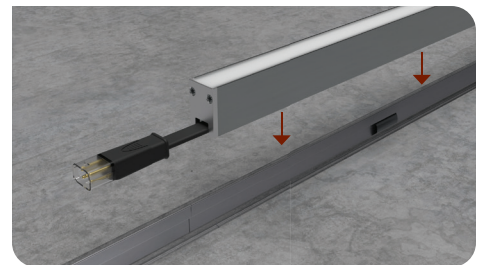

- 5 | Provide power to the fixtures.

