




# DMXC-2C-4Z-IW-W

## WIRING INSTRUCTIONS

- 1 Remove two white plastic covers on decoder. Connect in-wall control station to power supply and decoder as shown below. Connect decoder to power supply and LED lighting strip(s) as shown below.

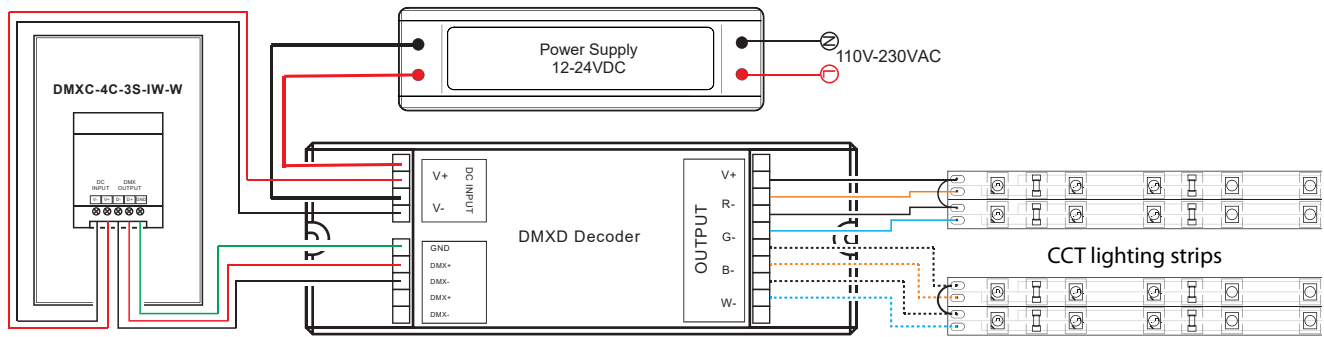

- 2 Once all connections have been made, apply power to in-wall control station and decoder.
- 3 Replace two white plastic covers on decoder.
- 4 Confirm zone assignments correlate to their respective DMX start addresses (refer to the system's decoder setup instructions for more information).