



VINE™ FLUSH PENDANT

INSTALLATION INSTRUCTIONS



WARNING—SHOCK HAZARD!
BEFORE CONNECTING, TURN AC POWER OFF AT CIRCUIT BREAKER
Failure to do so may result in serious injury or death.


SAFETY PRECAUTIONS:
Products should be installed and serviced by a qualified, licensed electrician in accordance with applicable local and national electrical safety codes.

Never install within 10ft or less from the nearest edge of a pool, spa, fountain, or similar location.


Never use currents or voltages that are not compatible.

Never modify or take apart KELVIX components beyond instructions or the warranty will be void.


- ① If using polycarbonate sleeve measure desired length of light fixture from the bottom to the edge of the ceiling mount minus 0.87" (22mm) and cut.

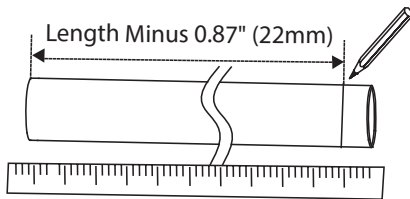


- ② Slip inner sleeve over power feed and terminal ends. Use small philips screwdriver to 'punch' pilot holes. Fasten with four screws.




- ③ If using polycarbonate sleeve slide rubber O-ring over fixture and nest at the base of both inner sleeves. Slide the polycarbonate sleeve tube over light fixture.

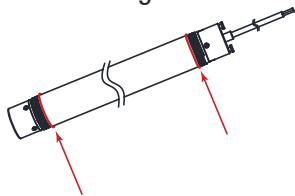

- ④ Drill holes into ceiling for drywall anchor or screw.

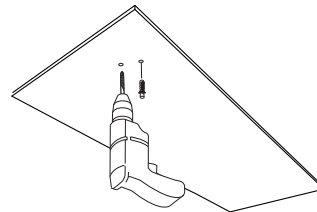

- ⑤ Fasten ceiling mount outer sleeve to ceiling with screws. Insert fixture feed cord through center hole, and rotate clockwise to lock in place. Tighten set screw and attach encap outer sleeve.

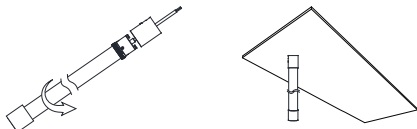

- ⑥ Connect leads to power source.

