



VINE™ SPLICE

INSTALLATION INSTRUCTIONS



WARNING—SHOCK HAZARD!
BEFORE CONNECTING, TURN AC POWER OFF AT CIRCUIT BREAKER
Failure to do so may result in serious injury or death.


SAFETY PRECAUTIONS:
Products should be installed and serviced by a qualified, licensed electrician in accordance with applicable local and national electrical safety codes.

Never install within 10ft or less from the nearest edge of a pool, spa, fountain, or similar location.


Never use currents or voltages that are not compatible.

Never modify or take apart KELVIX components beyond instructions or the warranty will be void.


- ① Slip mount cap over the fixture with threads facing towards the power leads.

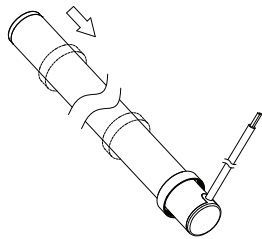


- ② Align connecting mount slot with side exit power lead. Use small philips screwdriver to "punch" pilot holes. Fasten with four small screws.




- ③ Tighten mount cap to the connecting mount.

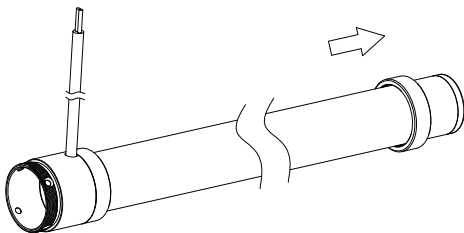

- ④ Slip other mount cap over the opposite end of the fixture with threads facing away from power leads. Tighten mount cap to the connecting mount.

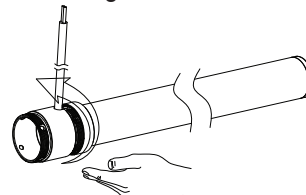

- ⑤ Slide end of light fixture into open end of the connector. Fasten with four small screws. Use screwdriver to 'punch' pilot holes. Tighten mount cap.

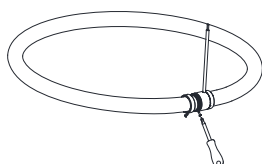

- ⑥ Connect leads to power source.

