




FX3D


Angled Mounting Clip Installs

⚠ SAFETY PRECAUTIONS


PRODUCT MODIFICATIONS
Product is NOT to be modified in the field. Modifications will void ETL listing and warranty.



DAMAGE
Remove from power source immediately if any damage is found in the LED strip or cabling.




CABLE HANDLING
The first 2.36" (60mm) of the cable should maintain its natural state before any bending occurs.




KELVIX ACCESSORIES
The use of third-party accessories must be pre-approved by Kelvix. Failure to do so will void manufacturer warranty.




SECURE CONNECTIONS
Ensure all electrical connections are insulated and secure before applying power.




PROPER CONNECTIONS
Connect power feed to appropriate power source or controls.



BENDING LIMITS
Do not bend product smaller than bending diameter: 9.40" (300mm).



POWER TESTING
Do not power up while coiled for over 30 minutes. This may lead to overheating and damage.







FX3D

Angled Mounting Clip Installs


- 1 Assemble the angle bracket to the plastic clip using 2 screws provided.

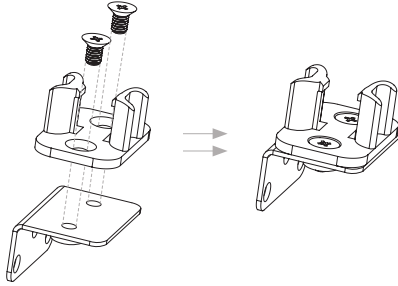

- 2 Push narrow section of tape between the LEDs into the plastic clip

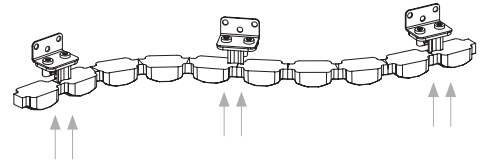

- 3 Place the tape with angle mounting clips to desired location and drill holes.

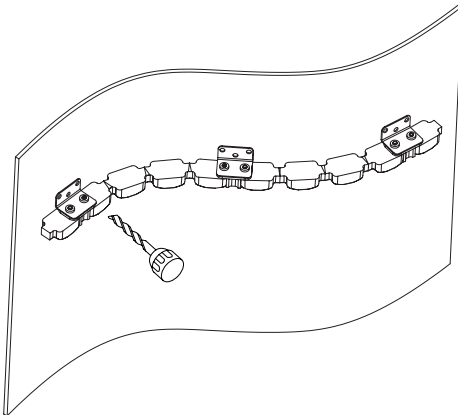

- 4 Attach tape and clips using appropriate mounting screws.

