



# Zolo™ Standoff Mounting

## Installation Instructions

### ⚠ SAFETY PRECAUTIONS


Products should be installed and serviced by a qualified, licensed electrician in accordance with applicable local and national electrical safety codes.

Never use currents or voltages that are not compatible.


Never install within 10 ft or less from the nearest edge of a pool, spa, fountain, or similar location.

Never modify or take apart Kelvix components beyond instructions or the warranty will be void.


- 1 | Position the fixture and mark the screw hole locations. Once the holes have been marked, pre-drill as needed.

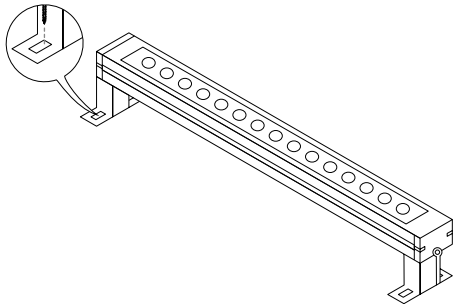


- 2 | Re-position the fixture and rotate it to one side. Locate the marked or pre-drilled holes. Attach with appropriate hardware.

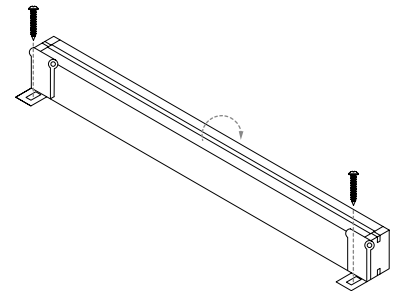

- 3 | Fully rotate the fixture to the other side to expose the remaining holes. Attach with appropriate hardware.

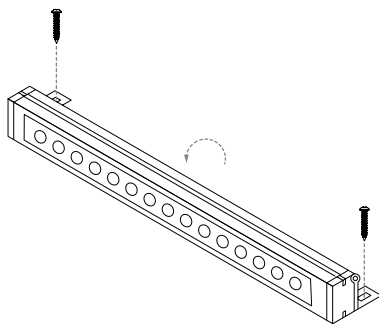

- 4 | Rotate fixture back to proper position. Tighten stand off pivot bolt to secure desired angle.

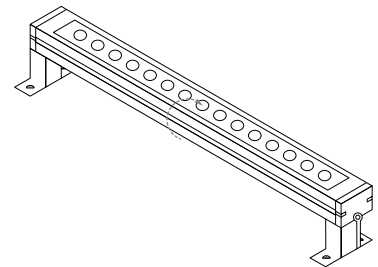





# Zolo™ Standoff Mounting

## Installation Instructions

- 5 | Connect each of the desired units in series using integrated cables or provided connectors.

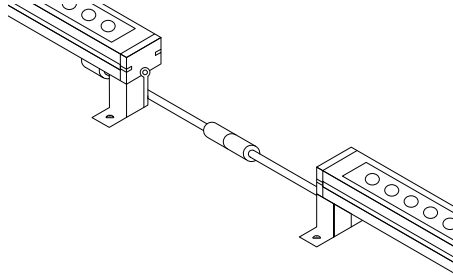

- 6 | Connect the first unit to the appropriate low voltage source. Make sure an end cap is on the last, unused integrated cable connector.

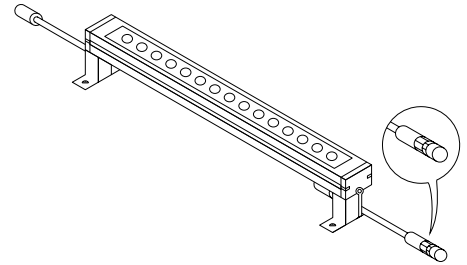



# Zolo™ Clip Mounting

## Installation Instructions

### ⚠ SAFETY PRECAUTIONS


Products should be installed and serviced by a qualified, licensed electrician in accordance with applicable local and national electrical safety codes.

Never use currents or voltages that are not compatible.


Never install within 10 ft or less from the nearest edge of a pool, spa, fountain, or similar location.

Never modify or take apart Kelvix components beyond instructions or the warranty will be void.


- 1 | Position the fixture with mounting clips and mark the screw hole locations. Once the holes have been marked, pre-drill as needed.




- 2 | Remove the mounting clips from the fixture. Secure clips in the marked or pre-drilled holes with the appropriate hardware.



- 3 | Secure fixture in mounting clips by pressing firmly in place.



- 4 | Connect each of the desired units in series using integrated cables or provided connectors.

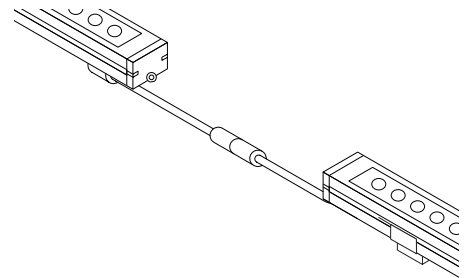

- 5 | Connect the first unit to the appropriate low voltage source. Make sure an end cap is on the last, unused integrated cable connector.

