


FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____

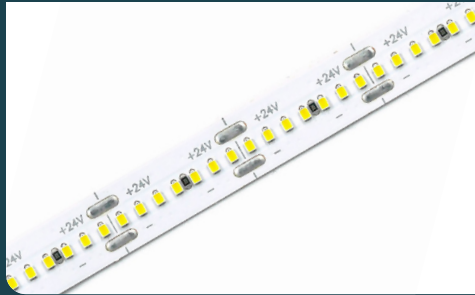

Direct View 200 (Indoor)

LINEAR LED



I Description

The newest member to our Direct View family, the DL-series offers a lower output option while still providing smooth, pixel-free illumination in all channels.

I Features

- Supports Title 24 JA8-2019 Compliance
- Suitable for Most Direct View Applications
- Dimmable
- 50,000 Hour Life
- 5-Year Warranty
- UL-Listed for Indoor Use
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

I Series Spec

Series	DL
Color/Temp	2400K–5000K
Dimming Protocol	PWM, TRIAC*, 0-10V*, DMX 512*
Indoor/Outdoor	Indoor
Input Voltage	24V DC
Wats per Foot (AVG)	3.1 W/ft
Beam Angle	120°
Max Run Length	20ft
CRI	90+
Operating Temp.	-40°F (-40°C) to 149°F (65°C)
Cut Intervals	1.00" (25.0mm)
Tape Width	0.47" (12.0mm)
Tape Height	0.05" (1.2mm)
Diode	2016
Field Cuttable	Yes

Additional Accessories Needed

I Product Code Builder

Item

Input Voltage

	24V
--	-----

24V – 24V DC

- DL24K** – Direct View 200 2400K
- DL27K** – Direct View 200 2700K
- DL30K** – Direct View 200 3000K
- DL35K** – Direct View 200 3500K
- DL40K** – Direct View 200 4000K
- DL50K** – Direct View 200 5000K

Example: DL24K-24V


Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 NO. 250.0



I Series Data

	DL24K	DL27K	DL30K	DL35K	DL40K	DL50K
Kelvin	2400K	2700K	3000K	3500K	4000K	5000K
Lumens (lm/ft)	170	189	195	205	220	237

I Dimensions

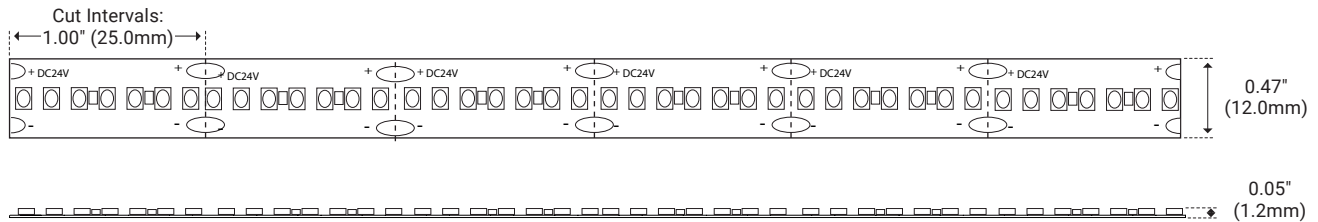

I Power Chart

		DL-200
Watts	1 ft	3
	2 ft	6.6
	3 ft	10.2
	4 ft	13.6
	5 ft	17
	6 ft	20.3
	7 ft	23.5
	8 ft	26.6
	9 ft	29.5
	10 ft	32.4
	11 ft	35.1
	12 ft	37.7
	13 ft	40.2
	14 ft	42.6
	15 ft	44.8
	16 ft	46.9
	17 ft	48.6
18 ft	49.2	
19 ft	51	
20 ft	52.8	