


FIXTURE TYPE \_\_\_\_\_

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_

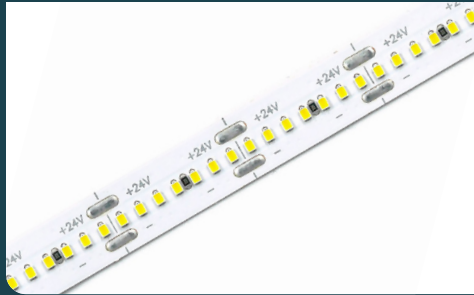

# Direct View 200 (Outdoor)

RUBBER-COATED LINEAR LED



## I Description

The newest member of our Direct View family, the DL-series offers a lower output option while still providing smooth, pixel-free illumination in all channels.

## I Features


- Supports Title 24 JA8-2019 Compliance
- Suitable for Most Direct View Applications
- Dimmable
- 50,000 Hour Life
- 5-Year Warranty
- UL-Listed for Indoor and Outdoor Use
- Silicone Outer Jacket Material
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

## I Series Spec

Series	DL
Color/Temp	2700K–5000K
Dimming Protocol	PWM, TRIAC*, 0-10V*, DMX 512*
Indoor/Outdoor	Indoor & Outdoor
Input Voltage	24V DC
Wats per Foot (AVG)	3.1 W/ft
Beam Angle	120°
Max Run Length	20ft
CRI	90+
Operating Temp.	-40°F (-40°C) to 149°F (65°C)
Cut Intervals	1.00" (25.0mm)
Tape Width	0.50" (13.2mm)
Tape Height	0.25" (6.0mm)
End Cap Width	0.56" (14.2mm)
End Cap Height	0.37" (9.0mm)
Diode	2016
Field Cuttable	No
IP Rating	IP67

Additional Accessories Needed

## I Product Code Builder

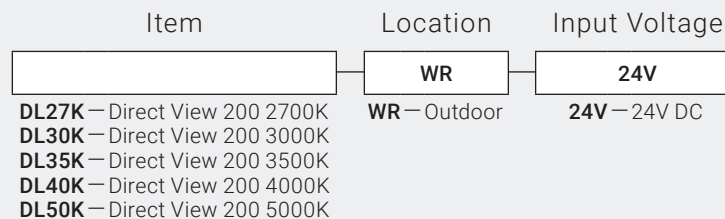

Example: DL27K-WR-24V


Conforms to ANSI/UL Standard 2108  
Certified to CAN/CSA Standard C22.2 NO. 250.0



## I Series Data

	DL27K	DL30K	DL35K	DL40K	DL50K
Kelvin	2700K	3000K	3500K	4000K	5000K
Lumens (lm/ft)	189	195	205	220	237

## I Dimensions

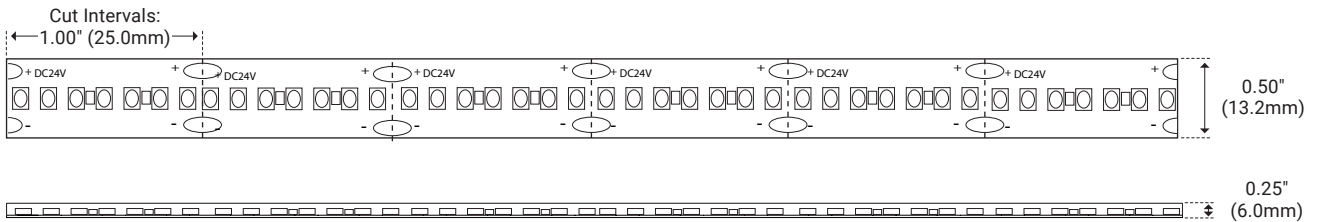

## I Power Chart

		DL-200
Watts	1 ft	3
	2 ft	6.6
	3 ft	10.2
	4 ft	13.6
	5 ft	17
	6 ft	20.3
	7 ft	23.5
	8 ft	26.6
	9 ft	29.5
	10 ft	32.4
	11 ft	35.1
	12 ft	37.7
	13 ft	40.2
	14 ft	42.6
	15 ft	44.8
	16 ft	46.9
	17 ft	48.6
	18 ft	49.2
19 ft	51	
20 ft	52.8	