




JAGGER™ (INDOOR)

JA-SERIES | CORNER BENDING | LINEAR LED LIGHTING

Fixture Type: _____

Project: _____

Location: _____

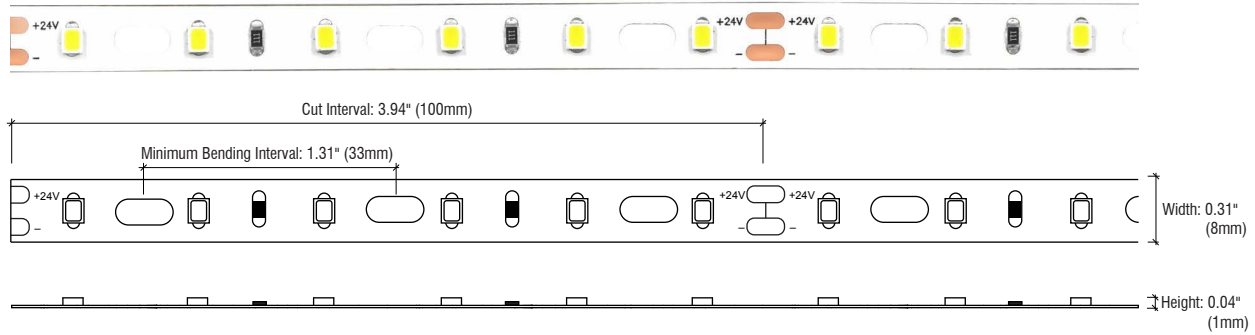


| MODEL: | JA27K-24V | JA30K-24V | JA35K-24V | JA40K-24V | JA50K-24V | JA65K-24V |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Kelvin | 2700K | 3000K | 3500K | 4000K | 5000K | 6500K |
| Lumens | 155 lm/ft | 159 lm/ft | 163 lm/ft | 167 lm/ft | 171 lm/ft | 173 lm/ft |

PRODUCT FEATURES

- Ideal for Curved Lighting Applications
- Dimmable
- 50,000 Hour Life
- 5-Year Warranty
- UL-Listed for Indoor Use
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

SPECIFICATIONS

| | |
|----------------------|---------------------------------|
| Series | JA - Jagger™ (Indoor) |
| Input Voltage | 24V DC / Constant Voltage |
| Watts per Foot | 2.2W/ft @ Maximum Run Length |
| Beam Spread | 120° |
| Max Run Length | Unlimited, power every 16ft |
| Production Intervals | 3.94" (100mm) |
| Dimensions | 0.31" (8mm) x 0.04" (1mm) |
| CRI | 90+ |
| Diode | 2835 |
| Dimming Options | PWM, Triac, 0-10V, DMX, Hi-lume |
| Temp Range | -40°F (-40°C) to 113°F (45°C) |

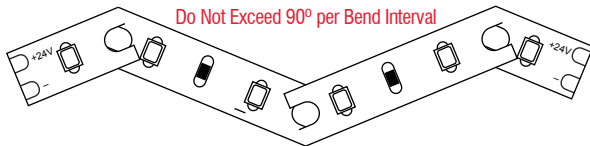

TOTAL WATTAGE USED AT EACH LENGTH

| 1ft | 2ft | 3ft | 4ft | 5ft | 6ft | 7ft | 8ft | 9ft | 10ft | 11ft | 12ft | 13ft | 14ft | 15ft | 16ft |
|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|------|
| 2.2 | 3.6 | 6.6 | 8.8 | 11 | 13.2 | 15.4 | 17.6 | 19.8 | 22 | 24.2 | 26.4 | 28.6 | 30.8 | 33 | 35.2 |

Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.0

