



Complete Specification Sheet

RF 2 Channel 4 Zone Handheld Controller



RF 2 Channel 4 Zone Handheld Controller

4 Zone
Handheld Remote Control




Specifications

Category	Controls and Dimmers
Series	RF
Family	2CH
Environment	IP20
Input Voltage	4.5V DC
Battery Compartment	3 x 1.5V AAA Batteries
RF Range	Up to 50ft
Dimming Range	1% - 100%
Operation Frequency	434MHz / 868MHz
Length	2.18in (55.56mm)
Width	0.68in (17.46mm)
Height	4.75in (120.65mm)
Operating Temp.	32°F (0°C) to 104°F (40°C)


Features

- Controls up to Four Zones Separately or Synchronously
- Saves up to Three Scenes per Zone
- Compatible With RFR-A Series Receivers
- Can Control Multiple RF Receivers
- Remembers Last Setting
- 4 Preset Brightness Levels

Order Code



Dimensions and Operation

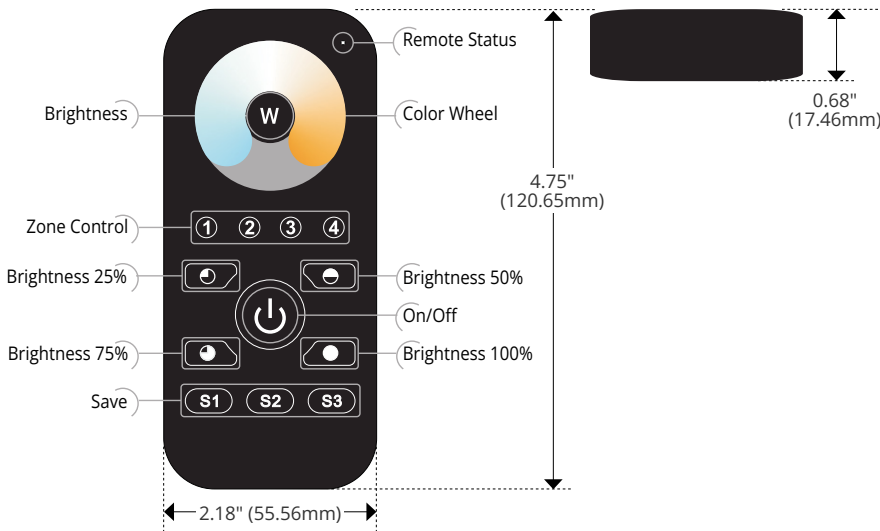

Kelvix reserves the right to update the product specifications at any time. Field modifications will void Kelvix warranty

Fixture Type _____

Project Name _____

Location _____