



# Complete Specification Sheet

## Crayon Static Color

# Crayon Static Color

Rubber-Coated Static Color Linear LED Strip Tape



### Specifications

<b>Category</b>	Linear LED
<b>Series</b>	Crayon
<b>Family</b>	Static Color
<b>Watts Per Foot</b>	3.39W/ft
<b>Environment</b>	IP67
<b>CRI</b>	90+
<b>CCT Options</b>	Red, Green, Blue, Yellow, Pink, Amber, Gold, Light Blue, Light Green, Violet
<b>Input Voltage</b>	24V DC
<b>Width</b>	0.20in (5.0mm)
<b>Height</b>	0.47in (12.0mm)
<b>Max Run Length</b>	16ft (4.87M)
<b>Cut Intervals</b>	1.97" (50.0mm)
<b>Operating Temp.</b>	-4°F (-20°C) to 113°F (45°C)
<b>Dimming Options</b>	PWM, Triac, 0-10V, DMX, Hi-lume


### Features

- Dimmable
- 50,000 Hour Life Expectancy
- 5-year Warranty
- UL-Listed for Indoor and Outdoor Use
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

### Description

Available in 10 color options, these dedicated-color LED's represent the highest available level of color-saturation. These systems are simple and economical as they require no control system to operate.

### Dimensions

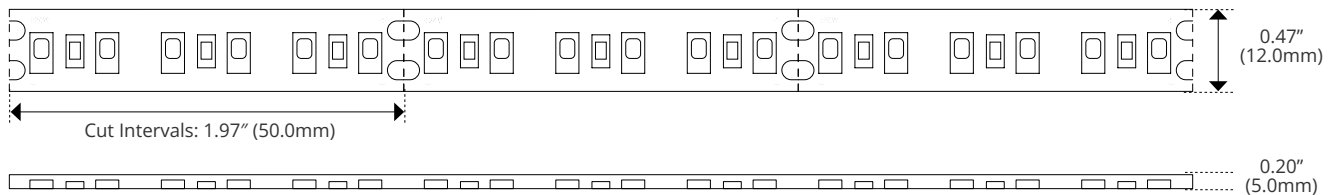

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.  
 Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_




# Product Code Builder







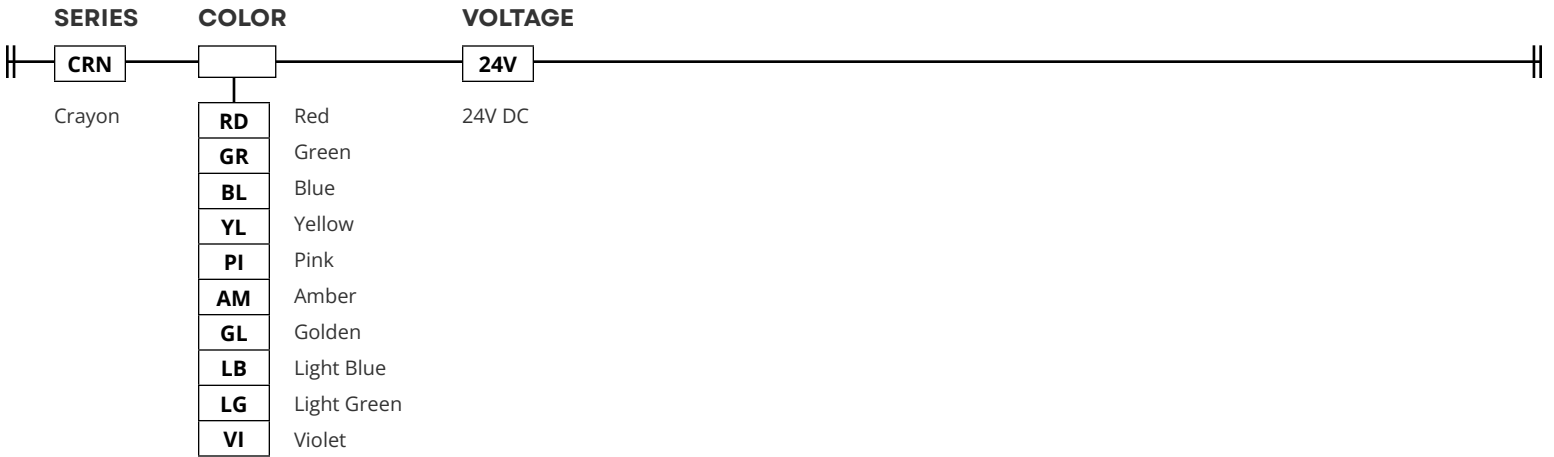



## Crayon Static Color

### Product Code Builder

Example: CRN-RD-24V



### PRODUCT DATA

Color	Red	Green	Blue	Yellow	Pink	Amber	Golden	Light Blue	Light Green	Violet
<b>Wavelength (nm)</b>	615-625	515-525	460-470	585-595	550-560	590-615	580-590	465-485	525-545	445-465
<b>Approx. Representation</b>										
<b>Lumens (lm/ft)</b>	160	350	87	122	210	245	350	210	400	105

Feet	Watts
1	3.6
2	7.2
3	10.7
4	14.2
5	17.7
6	21.2
7	24.6
8	28
9	31.4
10	34.8
11	38.1
12	41.1
13	44.7
14	47.9
15	51.1
16	54.3

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.  
 Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_  
 Project Name \_\_\_\_\_  
 Location \_\_\_\_\_