



Complete Specification Sheet

Fizzix Static White



Fizzix Static White

24V Modular Linear LED Lighting System



Specifications

Category	Fixture
Series	Fizzix
Family	Static White
IP Rating	IP20
CRI	90+
CCT Options	2700K, 3000K, 3500K, 4000K, 5000K
Input Voltage	24V DC
Width	0.43in (11mm)
Height	0.46in (11.8mm)
Max Run Length	16.4ft (5M)
Lumens per Foot	259 - 280 lm/ft
Life Expectancy	50,000 Hour Life
Operating Temp.	-4°F (-20°C) to 113°F (45°C)


Features

- Direct View Without Diode Imaging
- Illuminated Modular Corners and Connections
- Magnetic or Fixed Mounting
- For Use with 24V Power Supplies
- Dimmable

Description

Boasting fully illuminated corners and couplers, Fizzix™ offers seamless pixel-free illumination combined with integral snap-together connectivity. Fizzix is affordable and simple to install, requiring no field modifications. A signature feature of Fizzix is the ability to change the lighting plane within the same run. In addition to creative shapes and direct-view lighting applications, Fizzix is fantastic for linear installations such as displays, coves, undercabinet, and toe-kick lighting.

Dimensions

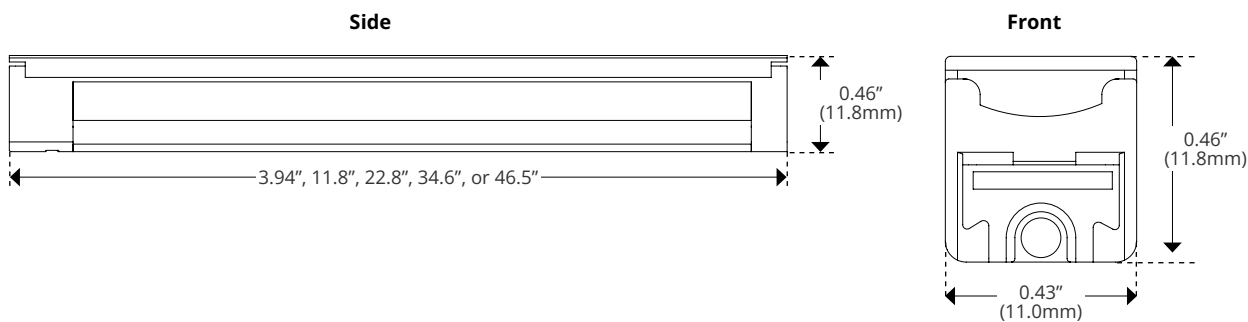

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 1598. Certified to CAN/CSA Standard C22.2 No. 250.0
 5% tolerance for all listed data.

Fixture Type _____

Project Name _____

Location _____




Product Code Builder


Fizzix Static White

Product Code Builder

Example: FZX-300-30K-24V-SV

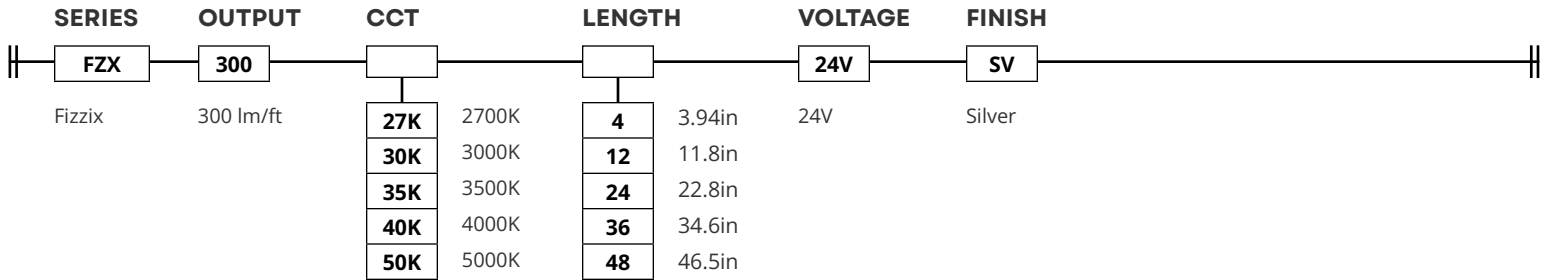

LENGTH

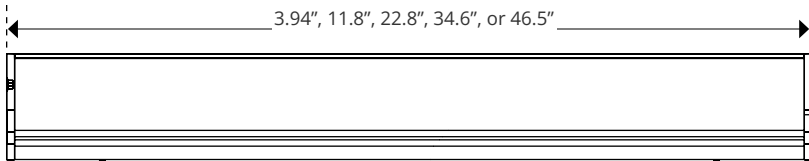

CCT

Length	Lumens (3000K)	Watts
4in	88lm	1.25W
12in	259lm	3.7W
24in	560lm	8W
36in	840lm	12W
48in	1120lm	16W

FINISH



Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
5% tolerance for all listed data

Fixture Type _____

Project Name _____

Location _____




Optional Accessories

Fizzix Static White

Corner and Junction Options

IMAGE


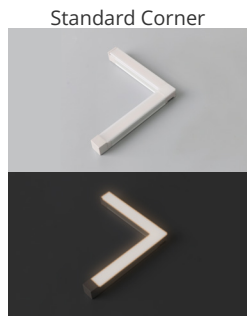


ORDER CODE

SERIES	LENGTH	CCT	SHAPE										
FZX	089-083		C										
Fizzix	89 x 83mm	<table border="1"> <tr><td>27K</td><td>2700K</td></tr> <tr><td>30K</td><td>3000K</td></tr> <tr><td>35K</td><td>3500K</td></tr> <tr><td>40K</td><td>4000K</td></tr> <tr><td>50K</td><td>5000K</td></tr> </table>	27K	2700K	30K	3000K	35K	3500K	40K	4000K	50K	5000K	Standard Corner
27K	2700K												
30K	3000K												
35K	3500K												
40K	4000K												
50K	5000K												


SPECIFICATIONS

Watts	2.2W
Lumens	155
Length	3.50in (89.0mm)
Width	3.27in (83.0mm)
Height	0.46in (11.8mm)

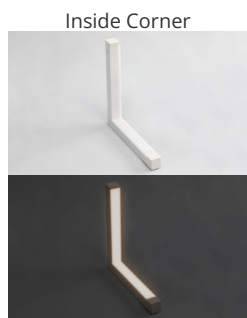



SERIES	LENGTH	CCT	SHAPE										
FZX	094-092		I										
Fizzix	94 x 92mm	<table border="1"> <tr><td>27K</td><td>2700K</td></tr> <tr><td>30K</td><td>3000K</td></tr> <tr><td>35K</td><td>3500K</td></tr> <tr><td>40K</td><td>4000K</td></tr> <tr><td>50K</td><td>5000K</td></tr> </table>	27K	2700K	30K	3000K	35K	3500K	40K	4000K	50K	5000K	Inside Corner
27K	2700K												
30K	3000K												
35K	3500K												
40K	4000K												
50K	5000K												

Watts	2.2W
Lumens	155
Length	3.70in (94.0mm)
Width	3.62in (92.0mm)
Height	0.46in (11.8mm)




SERIES	LENGTH	CCT	SHAPE										
FZX	096-093		O										
Fizzix	96 x 93mm	<table border="1"> <tr><td>27K</td><td>2700K</td></tr> <tr><td>30K</td><td>3000K</td></tr> <tr><td>35K</td><td>3500K</td></tr> <tr><td>40K</td><td>4000K</td></tr> <tr><td>50K</td><td>5000K</td></tr> </table>	27K	2700K	30K	3000K	35K	3500K	40K	4000K	50K	5000K	Outside Corner
27K	2700K												
30K	3000K												
35K	3500K												
40K	4000K												
50K	5000K												

Watts	2.2W
Lumens	155
Length	3.78in (96.0mm)
Width	3.66in (93.0mm)
Height	0.46in (11.8mm)

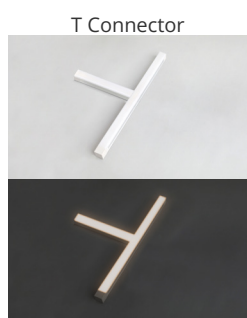

SERIES	LENGTH	CCT	SHAPE										
FZX	177-090		T										
Fizzix	177 x 90mm	<table border="1"> <tr><td>27K</td><td>2700K</td></tr> <tr><td>30K</td><td>3000K</td></tr> <tr><td>35K</td><td>3500K</td></tr> <tr><td>40K</td><td>4000K</td></tr> <tr><td>50K</td><td>5000K</td></tr> </table>	27K	2700K	30K	3000K	35K	3500K	40K	4000K	50K	5000K	T Connector
27K	2700K												
30K	3000K												
35K	3500K												
40K	4000K												
50K	5000K												

Watts	3.5W
Lumens	260
Length	6.97in (177.0mm)
Width	3.54in (90.0mm)
Height	0.46in (11.8mm)



Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
5% tolerance for all listed data

Fixture Type _____

Project Name _____

Location _____




Optional Accessories

Fizzix Static White


Corner and Junction Options

IMAGE

Standard Corner

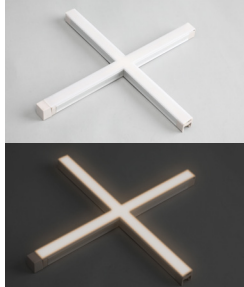


ORDER CODE

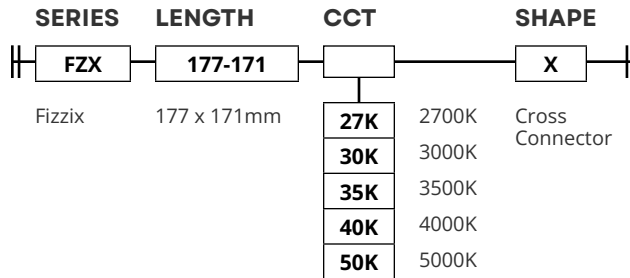


SPECIFICATIONS

Watts	4.4W
Lumens	310
Length	6.97in (177.0mm)
Width	6.73in (171.0mm)
Height	0.46in (11.8mm)




Mounting and Power Options

Flat Mounting Clip




Mounts flat.
Included with every fixture.

Angled Mounting Clip



Mounts at 45° angle.

Magnetic Mounts




Magnets with 3M® Adhesive

Hardwire Power Feed




Connects Fizzix to Power Supply

Cord Coupler



Connects Fizzix to Fizzix

End Caps



Covers Terminals.
Included with every fixture.

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
5% tolerance for all listed data

Fixture Type _____

Project Name _____

Location _____