



Complete Specification Sheet

Nicolaudie Stick CW4

Nicolaudie Stick CW4

Glass Touch Panel DMX512 Controller



Specifications

Category	Partner Products
Series	Nicolaudie
Family	CW4
Environment	IP20
Input Voltage	5 - 15V DC
Length	4.17in (105.9mm)
Width	5.75in (149.0mm)
Height	0.43in (10.9mm)
Physical	Wall Mounted
Operating Temp.	14°F (-10°C) to 113°F (45°C)
Data Storage	Built In Flash Storage (36 Scenes)
Dimming Input	Touch Interface (Optional: Dry Contact, Built-In Wifi)
Dimming Output	DMX512


Features

- Touch Interface
- Stand Alone
- Capable of up to 36 Scenes
- Remote iOS/Android Programming and Control

Description

The Nicolaudie Stick CW4 is perfect for advanced architectural lighting installations. With 1024 DMX channels, Wi-Fi control, scene calendar triggers, and a clean user-friendly panel, this controller is ideal for hotels, homes, and public spaces. Store up to 36 scenes and easily recall them via 6 touch-sensitive buttons for a seamless and customized lighting experience.

Dimensions

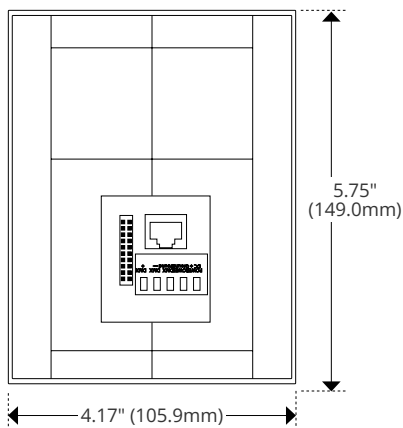

Kelvix reserves the right to update the product specifications at any time. Field modifications will void Kelvix warranty

Fixture Type _____

Project Name _____

Location _____




Product Code Builder

Nicolaudie Stick CW4

Product Code Builder


Example: DMXC-N2-6V-IW-B

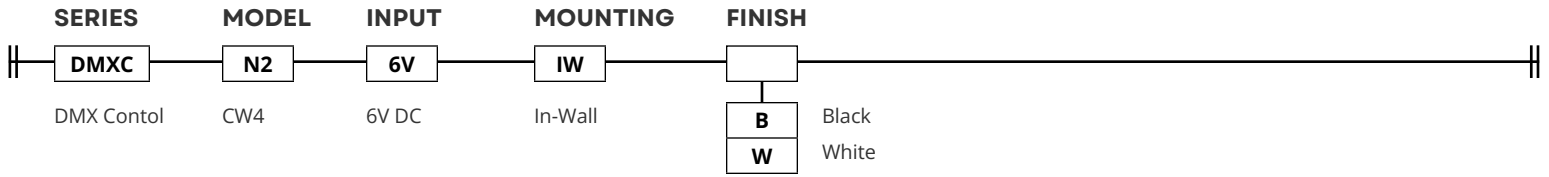

Product Data

Interfaces	
Glass Touch Panel	10+ Color Wheel
Arcolis Remote	iOS/Android App to program and control scenes
WiFi	Built in WiFi for Arcolis remote control
Capabilities	
DMX512	Terminal Block (512 Channels only) or Ethernet Port 1 (1024 Channels total)
Live Control	Color / Dimmer / Speed
Port Triggers	8 Dry Contact Ports
Clock	100 Clock triggers
Calendar	Trigger on Specific Date
WiFi	Built in WiFi for Arcolis remote control and programming

Wiring Diagram

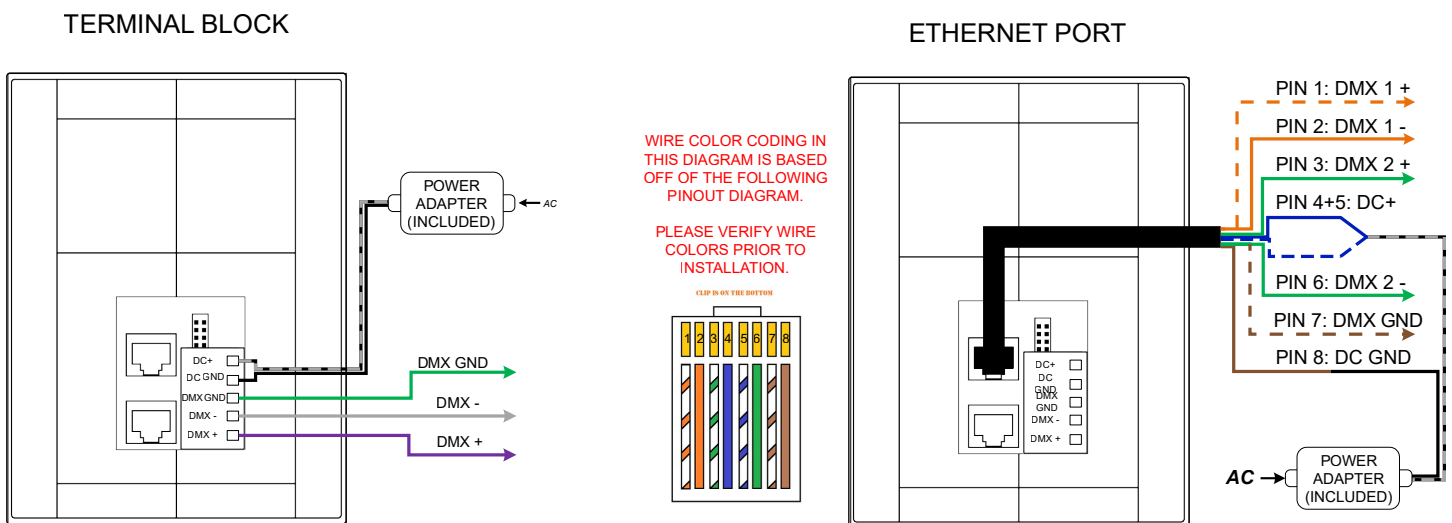

Kelvix reserves the right to update the product specifications at any time. Field modifications will void Kelvix warranty

Fixture Type _____

Project Name _____

Location _____