



# Complete Specification Sheet

## Pavex™ Square

# Pavex™ Square

Inground Hardscape Fixture



### Specifications

<b>Category</b>	Linear LED
<b>Series</b>	Pavex
<b>Family</b>	Square
<b>Lumens per Watt</b>	30 lm/w
<b>Environment</b>	IP67
<b>CCT Options</b>	2700K, 3000K, 3500K, 4000K, Red, Blue, Green
<b>Input Voltage</b>	24V DC
<b>Lengths</b>	4", 6", 8", or 12"
<b>Height</b>	3.39in (86.0mm)
<b>Impact Rating</b>	IK10
<b>Drive-Over Rating</b>	10,000 lbs
<b>Operating Temp.</b>	-13°F (-25°C) to 122°F (50°C)


### Features

- Perfect for Pavers, Gravel, Soil, Decks, Etc (Custom Housing needed for Concrete Mounting)
- Pure White Tempered Glass
- Drive-Over Rated
- Non-Slip Textured Surface
- High Impact Rated / IK10
- Custom Sizes Available

### Description

With squares and rectangles in various sizes, Pavex Square is perfect for adding visual interest to pathways and other hardscape applications NOTE: Pavex Lighting Source and Housing Sold Separately.

### Dimensions

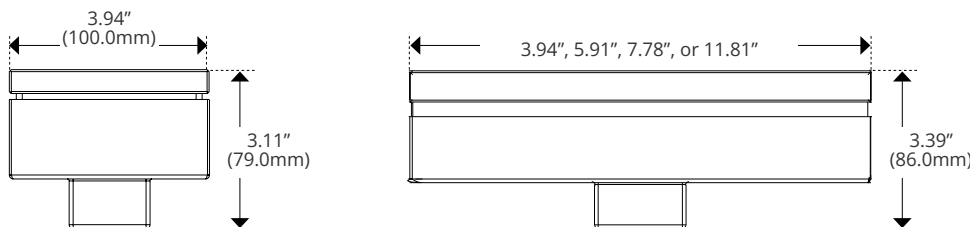

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.  
 Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_




# Product Code Builder

## Pavex™ Square

### Product Code Builder

Example: PVX-L-12X2-27-ST-L-SS-24V

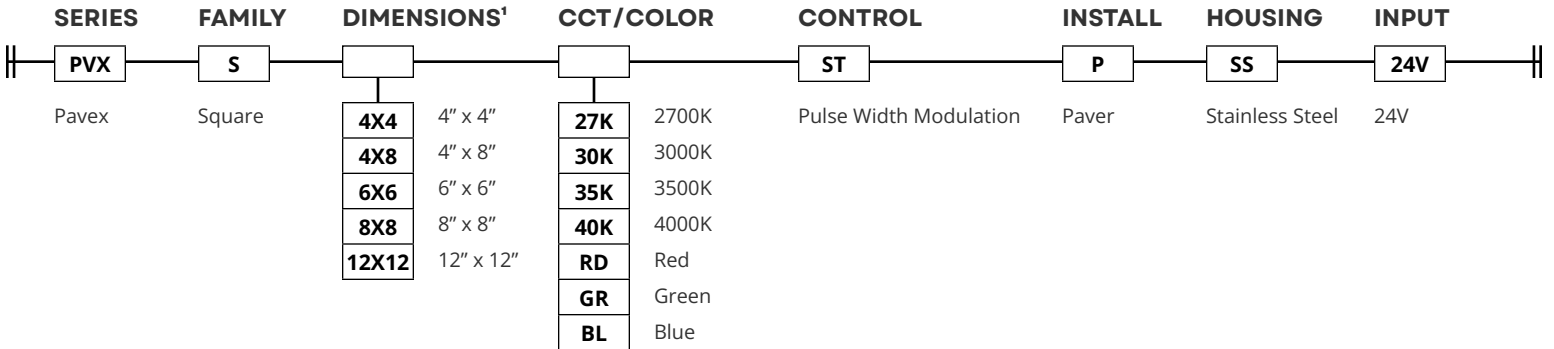

### PRODUCT DATA

Feet	Watts	Lumens
<b>4x4</b>	1.3W	39 lm
<b>4x8</b>	2.6W	78 lm
<b>6x6</b>	1.3W	39 lm
<b>8x8</b>	2.6W	78 lm
<b>12x12</b>	6W	180 lm

### DIMENSIONS

	Length	Width	Height
<b>4x4</b>	3.94in (100.0mm)	3.94in (100.0mm)	3.11in (79.0mm)
<b>4x8</b>	7.87in (200.0mm)	3.94in (100.0mm)	3.39in (86.0mm)
<b>6x6</b>	5.91in (150.0mm)	5.91in (150.0mm)	3.39in (86.0mm)
<b>8x8</b>	7.87in (200.0mm)	7.87in (200.0mm)	3.39in (86.0mm)
<b>12x12</b>	11.81in (300.0mm)	11.81in (300.0mm)	3.39in (86.0mm)

<sup>1</sup>Consult Kelvix for custom lengths

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.

Conforms to ANSI/UL Standard 2108

Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_




# Housing Options

## Pavex™ Square Housing

### Product Code Builder

Example: PVX-L-12X2-S-K1-SS

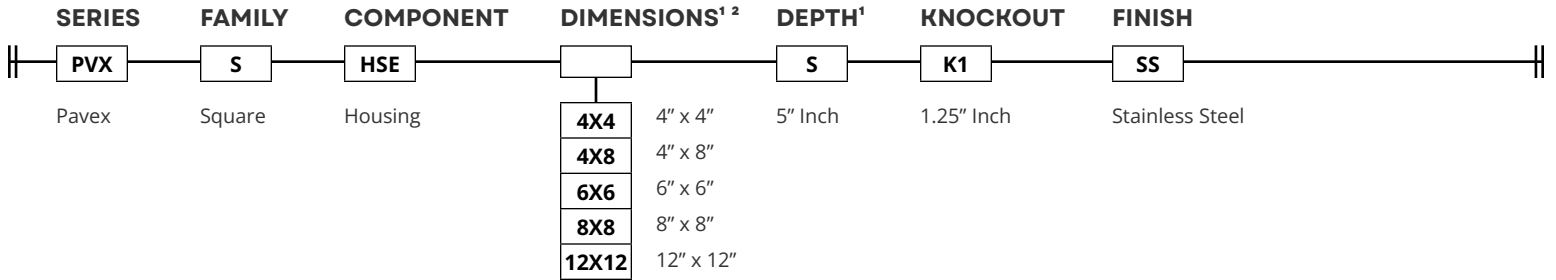


### IMAGE

Housing



### DIMENSIONS

	Length	Width	Height
<b>4x4</b>	4.13in (105.0mm)	4.13in (105.0mm)	5.00in (127.0mm)
<b>4x8</b>	8.07in (205.0mm)	4.13in (105.0mm)	5.00in (127.0mm)
<b>6x6</b>	6.10in (155.0mm)	6.10" (155.0mm)	5.00in (127.0mm)
<b>8x8</b>	8.07in (205.0mm)	8.07in (205.0mm)	5.00in (127.0mm)
<b>12x12</b>	11.81in (300.0mm)	11.81in (300.0mm)	5.00in (127.0mm)



<sup>1</sup>Consult Kelvix for custom lengths

<sup>2</sup>Housing dimensions will match Fixture dimensions. Options shown here for ease

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.

Conforms to ANSI/UL Standard 2108

Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_