



# Complete Specification Sheet

## 4 Channel RF Receiver

# 4 Channel RF Receiver

4 Channel 5 A/ch




### Specifications

Category	Controls and Dimmers
Series	RF
Family	Receiver
Environment	IP20
Input Voltage	12 - 24V DC
Output Voltage	4 x 5A
Dimming Range	1% - 100%
Operation Frequency	434MHz / 868MHz
Length	7.0in (177.8mm)
Width	1.81in (46.03mm)
Height	0.75in (19.05mm)
Operating Temp.	-4°F (-20°C) to 122°F (50°C)


### Features

- RGBW 4-channel RF Receiver
- Can be Controlled with Multiple RF Controllers
- Compatible with RFC-A-WIFI for Mobile App Control
- Compatible with RFC-A Series Controllers
- Manual Reset Switch
- Learning and Master/Slave Switches for Zone Assignment

### Dimensions

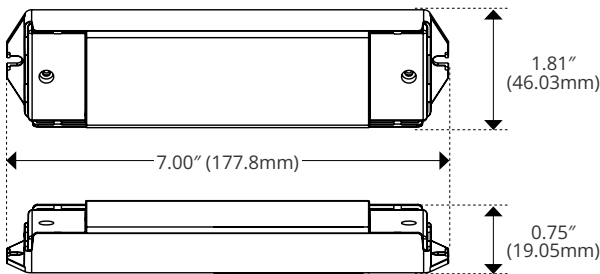

### Order Code



Kelvix reserves the right to update the product specifications at any time. Field modifications will void Kelvix warranty

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_



# Wiring Details

## 4 Channel RF Receiver

### Wiring Diagrams

