



# Complete Specification Sheet

## RF 4 Channel 3 Zone In-Wall Controller



### RF 4 Channel 3 Zone In-Wall Controller

3 Zone  
In-Wall Remote Control



### Specifications

Category	Controls and Dimmers
Series	RF
Family	IW
Environment	IP20
Input Voltage	12 - 24V DC
Wireless Control	RF
RF Range	Up to 50ft
Operation Frequency	434MHz / 868MHz
Length	2.93in (74.61mm)
Width	1.05in (26.81mm)
Height	4.75in (120.65mm)
Operating Temp.	32°F (0°C) to 104°F (40°C)


### Features

- Controls up to Three Zones
- Compatible With Standard 1-Gang Electrical Box
- Compatible With RFR-Series Decoders
- Individual Control of White, Red, Green, & Blue Channels
- Can Control Multiple RF Receivers
- Sensitive Glass Touch Panel
- Ten Preset Modes

### Order Code



### Dimensions and Wiring Diagram

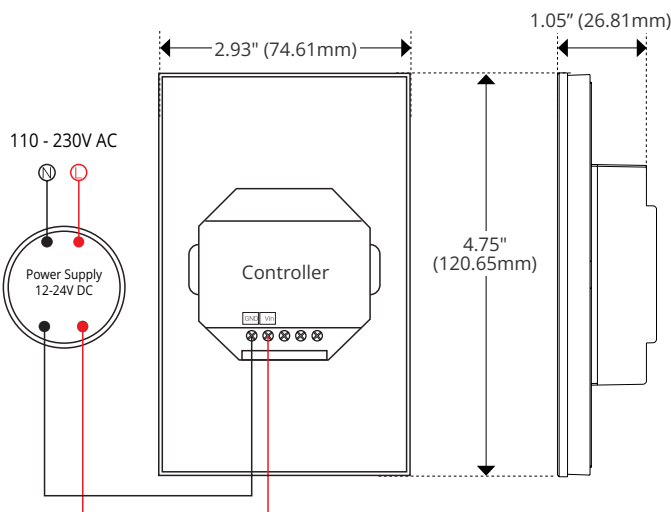

### Operation



Kelvix reserves the right to update the product specifications at any time. Field modifications will void Kelvix warranty

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_



# Wiring Details

## RF 4 Channel 3 Zone In-Wall Controller

### Wiring Diagrams

