




Complete Specification Sheet

Slinx™ Static White

Slinx™ Static White

Horizontal Bend Linear LED

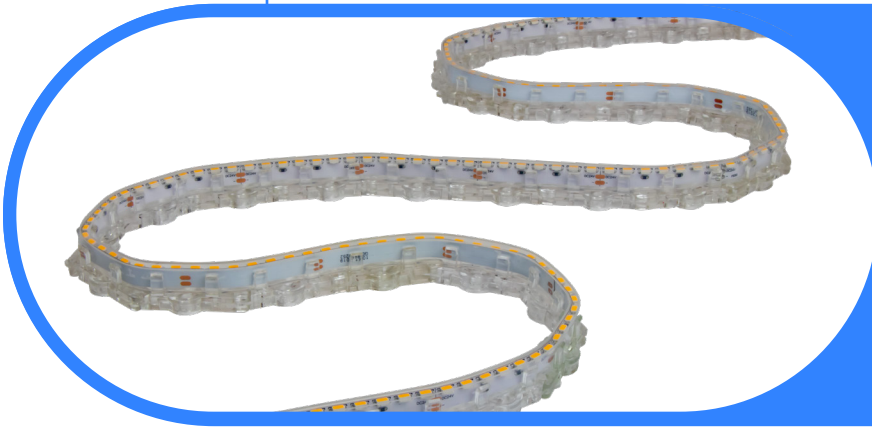

Specifications

Category	Linear LED
Series	Slinx
Family	Static White
Watts per Foot (AVG)	2.48W/ft
Environment	IP65
Diode	4020
CRI	90+
CCT Options	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
Input Voltage	24V DC
Width	0.41in (10.5mm)
Height	0.16" (4.2mm)
Max Run Length	20ft (6.09m)
Cut Intervals	1.97in (50.0mm)
Life Expectancy	50,000 Hour Life Expectancy
Operating Temp.	-4°F (-20°C) to 113°F (45°C)
Dimming Options	Triac, ELV, 0-10V, DMX


Features

- Side Emitting Diode
- 3/4" Bend Diameter
- Dimmable
- 50,000 Hour Life Expectancy
- UL-listed for Indoor and Damp Environments
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

Description

Slinx is an extremely unique IP65 lighting system offering horizontal bending. Perfect for uplighting or downlighting, Slinx can illuminate curved benches, railings, and other architectural details.

Dimensions

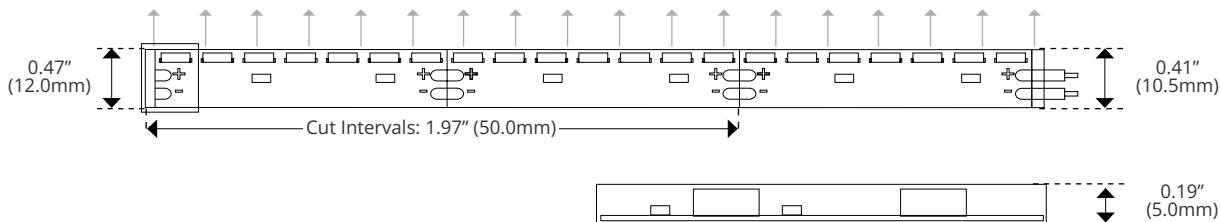

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____




Product Code Builder

Slinx™ Static White

Product Code Builder

Example: SX-27K-300-24V

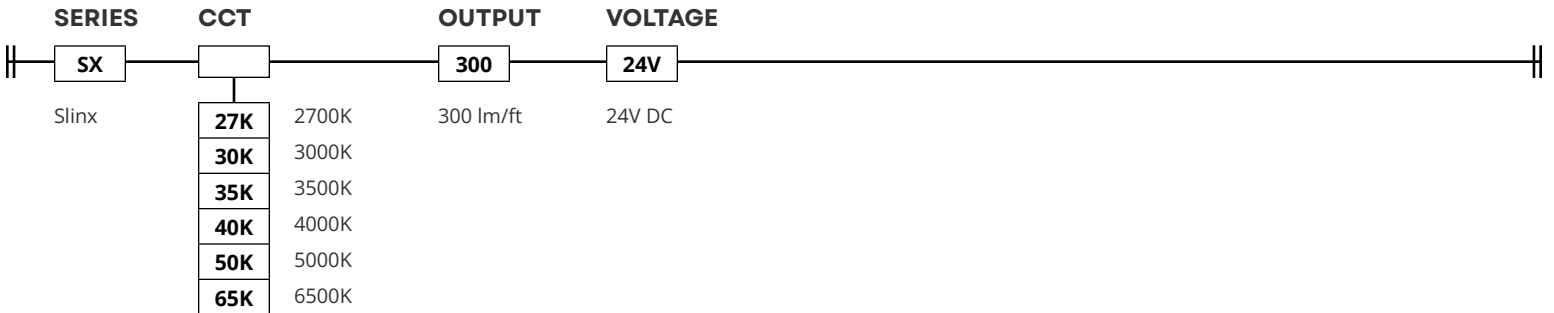


PRODUCT DATA

Feet	Watts
1	2.9
2	5.7
3	8.3
4	11.0
5	13.5
6	15.9
7	18.3
8	20.5
9	22.7
10	24.8
11	26.8
12	28.7
13	30.5
14	32.3
15	33.9
16	35.5
17	37.0
18	38.4
19	39.7
20	40.9

CCT	Lumens
27K	306
30K	315
35K	323
40K	340
50K	340
65K	340

BEND DIAMETER

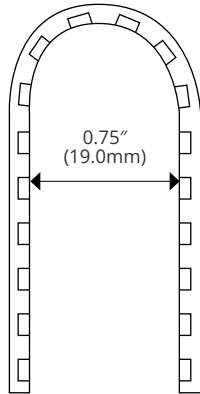

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____





Mounting Options

Slinx™ Static White

Mounting Options

IMAGE

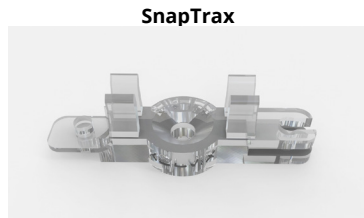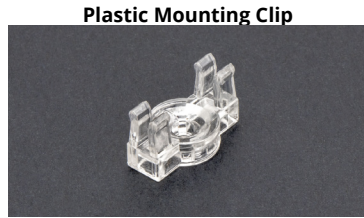

SPECIFICATIONS








SX-CLP-10S-PAK-P	
Length	1.00in (25.5mm)
Width	0.56in (14.9mm)
Height	0.56in (14.9mm)
Internal Width	0.12in (3.2mm)

Pack of 10 Units

SX-TRX-1F-PAK-P	
Pivot Length	1.50in (38mm)
Connected Length	2.18in (309.5mm)
Width	0.56in (14.9mm)
Height	0.56in (14.9mm)
Internal Width	0.12in (3.2mm)

Pack of 8 Units, 1 Pack Per Foot

DIMENSIONS

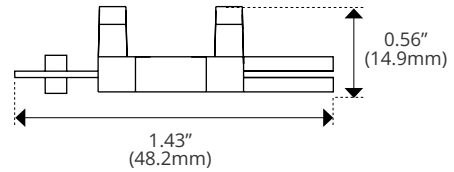

Fixture Type _____

Project Name _____

Location _____