




Complete Specification Sheet

UV Blacklight

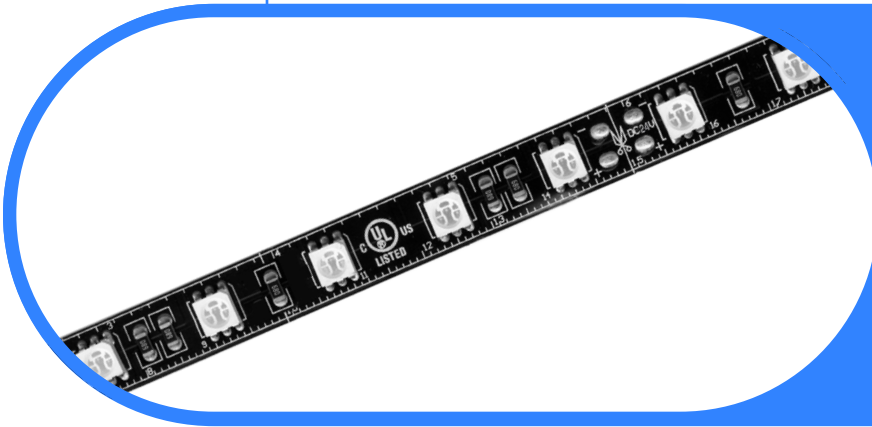

UV Blacklight

Rubber Coated Blacklight Linear LED



Specifications

Category	Linear LED
Series	UV
Family	Blacklight
Watts Per Foot (AVG)	2.3 W/ft
Environment	IP67
Diode	5050
Input Voltage	24V DC
Width	0.5in (13mm)
Height	0.25" (6mm)
Max Run Length	30ft (9.14m)
Cut Intervals	3.94in (100mm)
Beam Angle	120°
Operating Temp.	-40°F (-40°C) to 149°F (65°C)
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-Lume


Features

- Dimmable
- 50,000 Hour Life
- UL-Listed for Indoor and Outdoor Use
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies
- 5 Year Warranty
- IP67


Description

400 nanometer blacklight illuminates phosphor within a multitude of surfaces and liquids. This product can be used in a wide variety of applications including automotive, industrial, hospitality, medical, and entertainment.

Order Code



Dimensions

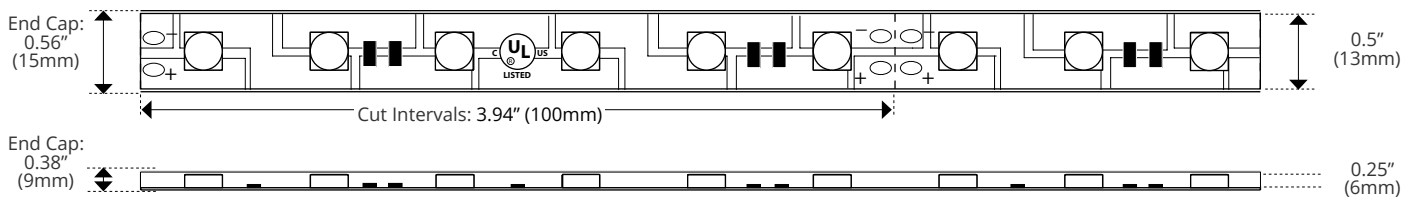

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____



Product Data

UV Blacklight

Product Code Builder

SERIES

H400-UV-WR-24V


UV Blacklight

POWER CHART

Feet	Watts
1	5.1
2	8.9
3	13
4	16.8
5	20.6
6	23.9
7	27.1
8	30.6
9	33.8
10	37.5
11	40.1
12	42.6
13	45.2
14	47.5
15	50.1

16	51.6
17	53.2
18	54.9
19	56.1
20	57.8
21	59.5
22	61.7
23	62.6
24	64.9
25	65.9
26	67.3
27	67.6
28	68.2
29	68.7
30	68.8

CIE 1931 ZOOM

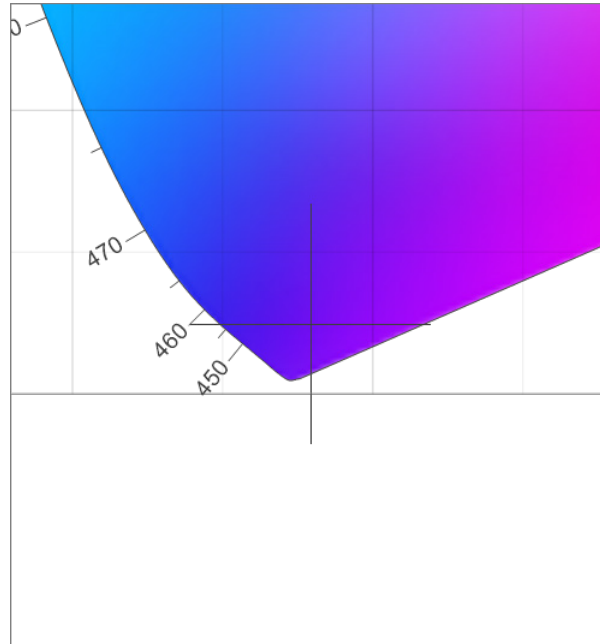

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____