




Complete Specification Sheet

Vine™ Static White

LINEAR
LED

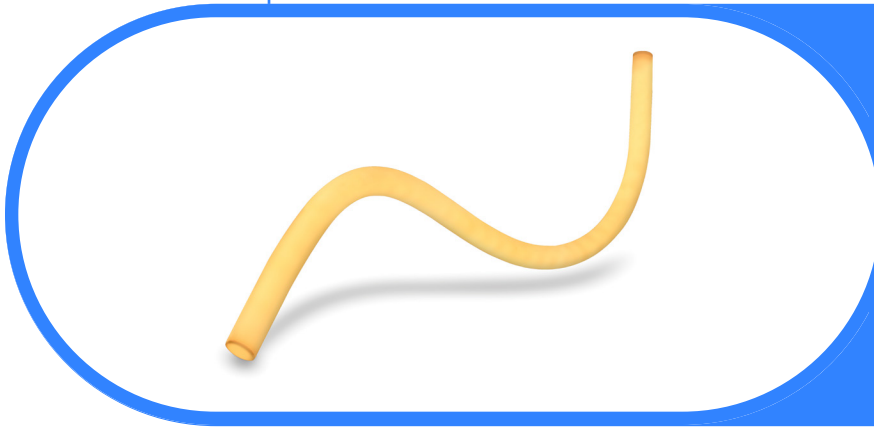

Vine™ Static White

Flexible Lighting System




Specifications

Category	Linear LED
Series	Vine
Family	Static White
Watts Per Foot	4.39 W/ft
Environment	IP67
CRI	90+
CCT Options	2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Input Voltage	24V DC
Width	1.0in (25mm)
Height	1.0in (25mm)
Max Run Length	16.4ft (5m)
Cut Intervals	0.47in (11.9mm)
Bend Diameter	4.72in (120mm)
Beam Angle	360°
Operating Temp.	-22°F (-30°C) to 131°F (55°C)
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-Lume

Features

- 360° Continuous Light Source
- Universal Dimming
- 36,000 Hour Life
- IP65 Rated for Outdoor Use
- Factory-Installed Power Feed
- Injection-Molded Flush End Caps
- For Use with 24V Power Supplies

Dimensions

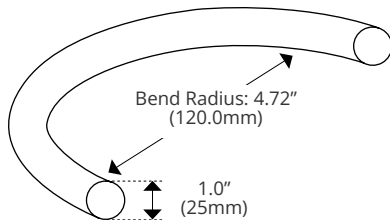

Kelvin reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvin installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____




Product Code Builder

Vine™ Static White

Product Code Builder

Example: VN-25-XX-24K-SF-72

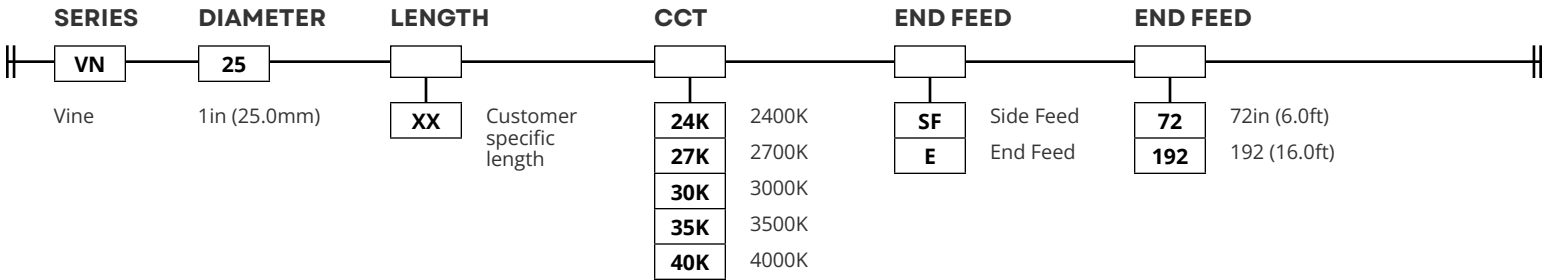

PRODUCT DATA

Color	2400K	2700K	3000K	3500K	4000K
Lumens (lm/ft)	230	268	275	281	290

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____



Mounting Options

Vine™ Static White

Mounting Options

IMAGE



Polycarbonate Mounting Clip



SPECIFICATIONS

VN-25-CP	
Length	0.98in (25.0mm)
Width	2.03in (51.6mm)
Height	1.06in (27.0mm)
Internal Height	1.00in (25.4mm)



DIMENSIONS

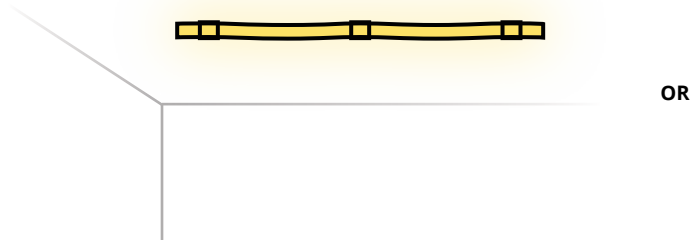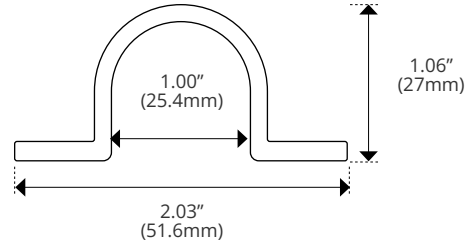

Concealed Mounting Clip



VN-25-CCP	
Length	1.43in (36mm)
Width	0.75in (19mm)
Height	0.27in (7mm)
Effective Height	0.11in (3mm)

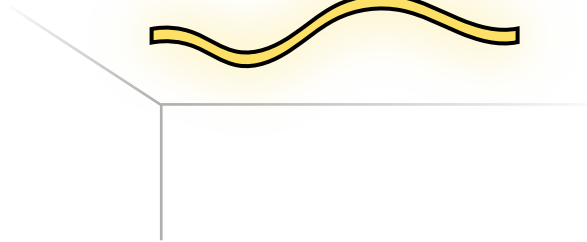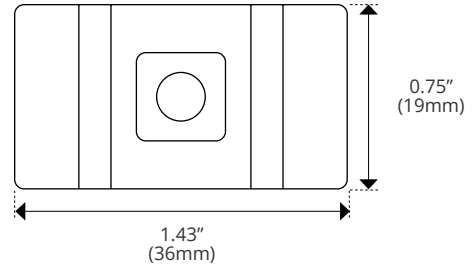

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____



Mounting Options

Vine™ Static White


Mounting Options

IMAGE



Splice



SPECIFICATIONS


	
Length	1.35in (34.5mm)
Diameter	1.22in (31.0mm)
Internal Diameter	1.00 (25.4mm)

DIMENSIONS

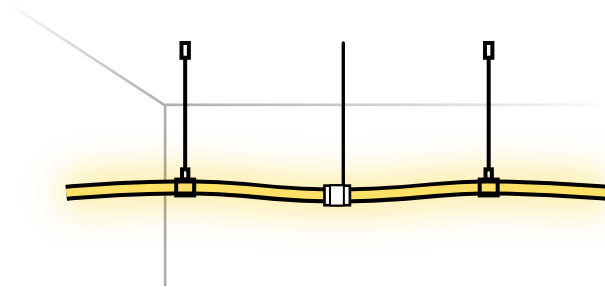
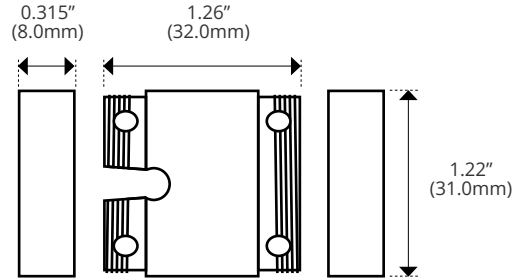


Arch



	
Length	1.65in (42.0mm)
Diameter	1.28in (32.5mm)
Internal Diameter	1.00 (25.4mm)

Pack of 10 Units

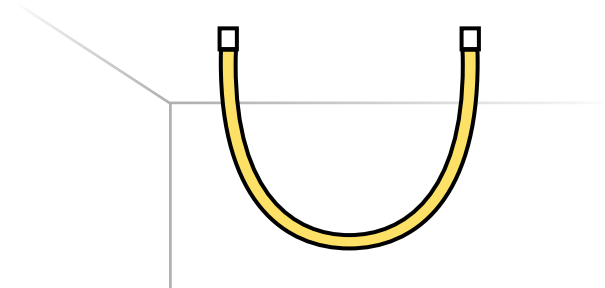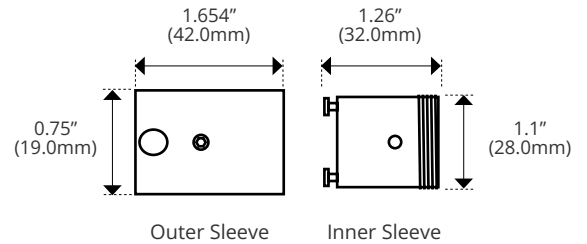

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____




Mounting Options

Vine™ Static White

Mounting Options

IMAGE

Flush Pendant

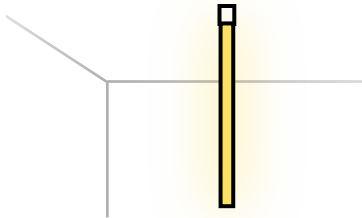


SPECIFICATIONS

VN-25-FP-FF	
EC Length	1.32in (33.5mm)
EC Diameter	1.24in (31.5mm)
CM Length	1.65in (42.0mm)
CM Diameter	1.28" (32.5mm)
Internal Diameter	1.00in (25.4mm)


VN-25-FP-2M*	
*Polycarbonate sleeve (not pictured) is required for Vine to hang perfectly vertical. See suspended pendant installation instructions for more info.	

DIMENSIONS


EC - End Cap

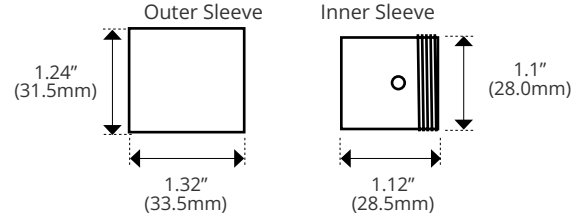

CM - Ceiling Mount


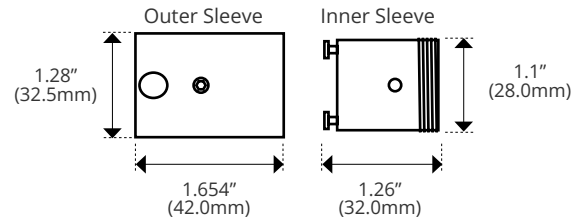


Suspended Pendant

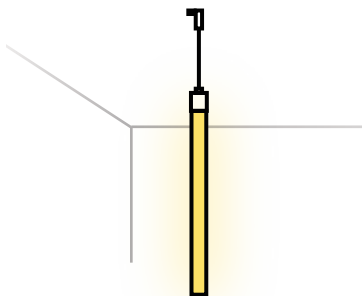

VN-25-SP-V-FF	
EC Length	1.65in (42mm)
EC Diameter	1.24in (31.5mm)
SP Length	2.68in (68mm)
SP Diameter	1.24in (31.5mm)
Internal Diameter	1.00in (25.4mm)

VN-25-SP-V-2M*	
*Polycarbonate sleeve (not pictured) is required for Vine to hang perfectly vertical. See suspended pendant installation instructions for more info.	

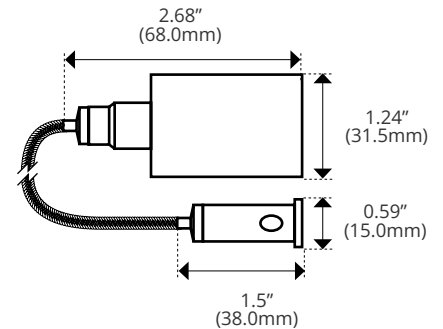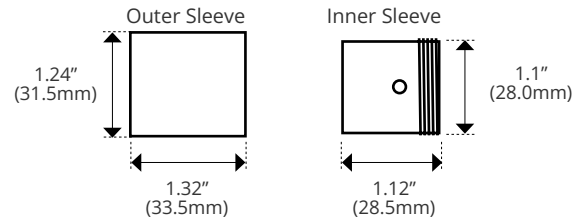

Fixture Type _____
 Project Name _____
 Location _____