




Complete Specification Sheet

Zolo 3 Static White

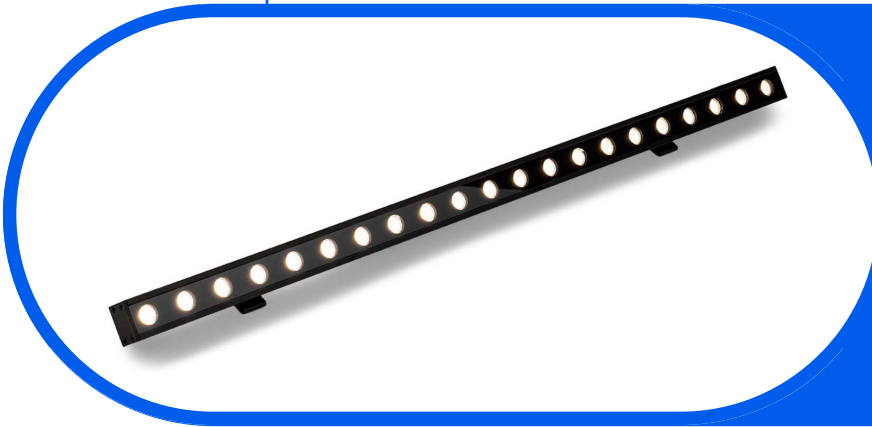

Zolo™ 3 Static White

Ultra-Thin LED Washer/Grazer



Specifications

Category	Fixture
Series	Zolo 3
Family	Static White
Watts per Foot	6 W/ft
IP Rating	IP20
CRI	85
CCT Options	2700K, 3000K, 3500K, 4000K
Input Voltage	24V DC
Max Run Length	15ft (4.6m)
Beam Angle	15°, 15°x30°, 20°, 30°, 20x40°, 60°, 80°
Lumens per Foot	540 lm/ft
Storage Temp.	-4°F (-20°C) to 140°F (60°C)
Operating Temp.	-40°F (-40°C) to 140°F (60°C)
Dimming Options	Dimming Available (Consult Factory for options)




Features

- Multiple Optics Options Available
- Extruded Aluminum Alloy Housing
- Available in Titanium Gray, Black, or White Finish
- Multi-Volt 24VDC Remote Driver (Sold Separately)
- Daisy Chain Multiple Fixtures
- Optional Glare Control Accessories
- Louver Options Available

Description

Zolo 3 is an interior washer/grazer with a small form factor, great light output, and is highly customizable to perfectly fit your project.

Dimensions



Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____




Product Code Builder

Zolo 3 Static White

Product Code Builder

Example: Z3-1-6W-27-20-S1-TG-NA

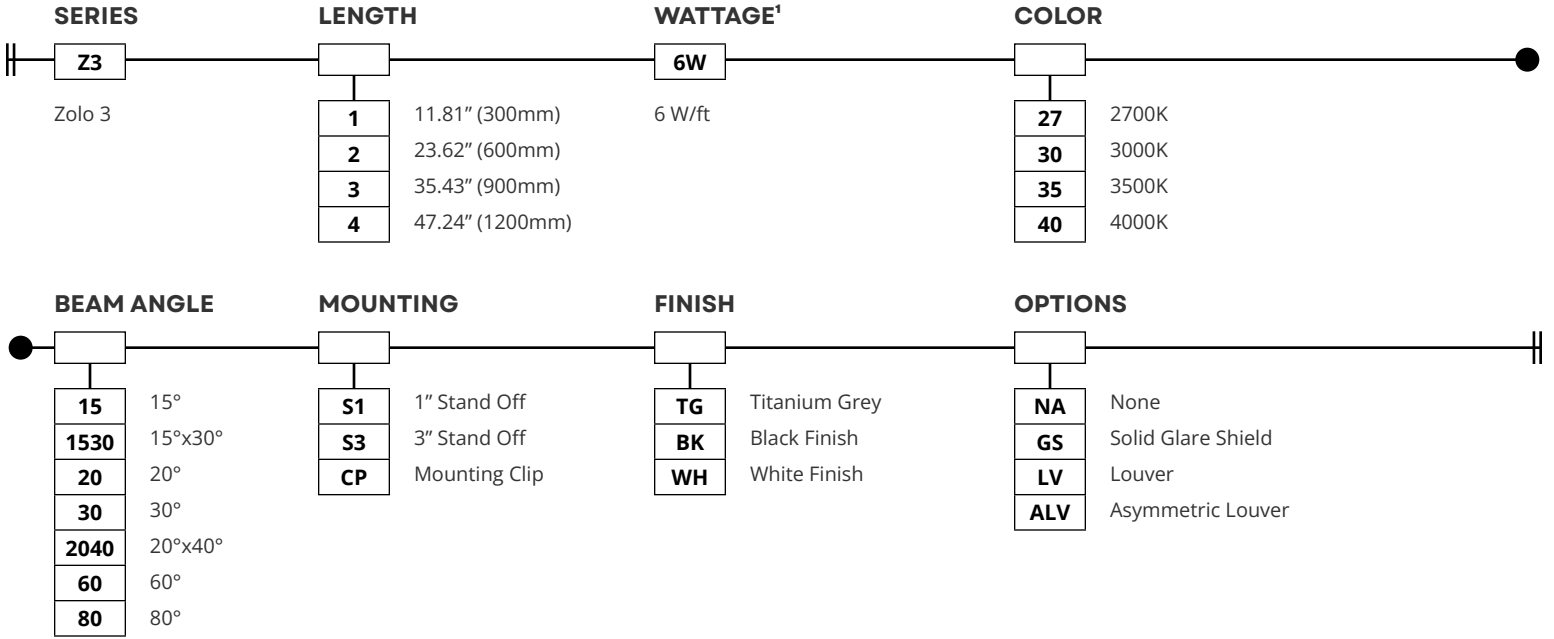

¹Other options available, consult factory.

MOUNTING

1" Stand Off



S1

Mounting Clip



CP

FINISH

Titanium Grey

RAL 9006

TG

Black

RAL 9011

BK


White

RAL 9001

WH

OPTIONS

Solid Glare Shield



GS

Louver



LV

Asymmetric Louver



ALV

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____



Optional Accessories

Zolo 3 Static White

Mounting

TYPE


1" Stand Off



DESCRIPTION

S1	
Width	1.25in (32.0mm)
Length	0.70in (18.0mm)
Height w/ Product	1.88in (47.75mm)
Stand Off Height	1.06in (27.0mm)
Rotation	70°


DIMENSIONS



3" Stand Off




S3	
Width	1.25in (32.0mm)
Length	0.70in (18.0mm)
Height w/ Product	3.66in (93.00mm)
Stand Off Height	2.83in (72.0mm)
Rotation	90°

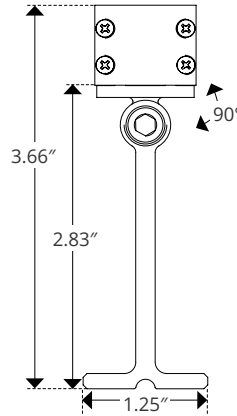

Mounting Clip



CP	
Width	1.29in (33.0mm)
Length	0.79in (20.0mm)
Height w/ Product	1.29in (33.0mm)
Clip Height	1.18in (30.0mm)
Stand Off Height	0.45" (11.5mm)



Fixture Type _____

Project Name _____

Location _____



Optional Accessories

Zolo 3 Static White

Options

TYPE

Solid Glare Shield




DESCRIPTION

— **GS** —

Width	1.02in (26.0mm)
Height w/ Product	1.46in (37.0mm)
Shield Height	0.63in (16.0mm)

DIMENSIONS




Louver



— **LV** —

Width	1.20in (30.5mm)
Stand Off Height	0.51in (13.0mm)
Height w Product	1.34in (34.0mm)
Height	1.04in (26.5mm)




Asymmetric Louver



— **ALV** —

Width	1.20in (30.5mm)
Stand Off Height	0.51in (13.0mm)
Height w Product	1.34in (34.0mm)
Height	1.04in (26.5mm)





Power and Connector Details

Zolo 3 Static White

Connectors

TYPE

Connector



DESCRIPTION


Order Code	Length
Z-03-FML-6	6ft (1.8M)
Z-03-FML-20	20ft (6M)
Z-03-FML-50	50ft (15.2M)

Connector



Order Code	Length
Z-03-FMC-1	1ft (0.30M)
Z-03-FMC-2	2ft (0.61M)
Z-03-FMC-6	6ft (1.8M)

WIRING GUIDE



Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____