


FIXTURE TYPE \_\_\_\_\_

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_

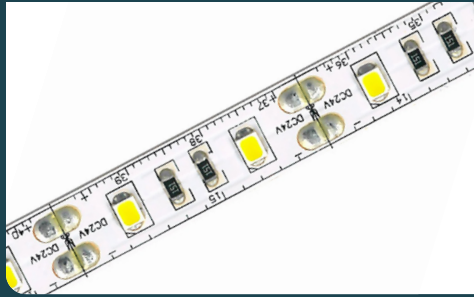

# Performance 300 (Indoor)

LINEAR LED LIGHTING



## I Description

Our most popular linear series! Performance 300 is a terrific combination of lumens, light quality, wattage, and price. This product can do it all, and the indoor version is a proven champion of coves, undercabinet, displays, and a variety of other tasks. This product has extremely short cut marks allowing for very precise lengths.


## I Features

- Supports Title 24 JA8-2019 Compliance
- 90+ CRI
- Dimmable
- 50,000 Hour Life
- 5-Year Warranty
- UL-Listed for Indoor Use
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

## I Series Spec

Series	PH
Input Voltage	24V DC
Watts per Foot	3.2W/ft
Beam Spread	120°
Max Run Length	Unlimited, power every 30ft
Cut Intervals	1.31" (33.3mm)
Dimensions	0.37" (10.0mm) × 0.06" (1.5mm)
CRI	90+
Diode	2835
Dimming Protocol	PWM, Triac, 0–10V, DMX, Hi-lime
Temp Range	-40°F (-40°C) to 149°F (65°C)

## I Dimensions

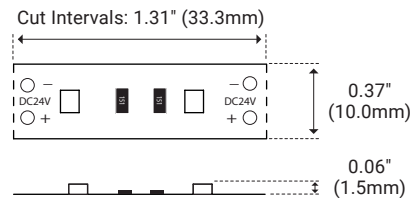

## I Product Code Builder

Item	Voltage
<p>PH24K — Performance 300 2400k</p> <p>PH27K — Performance 300 2700k</p> <p>PH30K — Performance 300 3000k</p> <p>PH35K — Performance 300 3500k</p> <p>PH40K — Performance 300 4000k</p> <p>PH50K — Performance 300 5000k</p>	<p><b>24V</b></p> <p>24V—24V DC</p>

Example: PH24K-24V

Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 NO. 250.0



## I Series Data

	PH24K	PH27K	PH30K	PH35K	PH40K	PH50K
Temp/Color (Kelvin)	2400K	2700K	3000K	3500K	4000K	5000K
Lumens (lm/ft)	262	322	330	340	347	356

## I Power Chart

Length	Watts
1 ft	4.2
2 ft	8.5
3 ft	12.7
4 ft	16.8
5 ft	21
6 ft	25.4
7 ft	29.2
8 ft	32.9
9 ft	36.9
10 ft	40.5
11 ft	44.2
12 ft	48
13 ft	51.4
14 ft	54.6
15 ft	57.7
16 ft	60.7
17 ft	64.3
18 ft	67
19 ft	70.4
20 ft	71.8
21 ft	75.2
22 ft	77.7
23 ft	80
24 ft	83
25 ft	85.1
26 ft	86.6
27 ft	88.7
28 ft	91.2
29 ft	93.7
30 ft	94.6