




OREX™—TITLE 24 EDITION

LINE VOLTAGE | 120HZ REFRESH RATE | 100FT RUNS

Fixture Type: _____

Project: _____

Location: _____

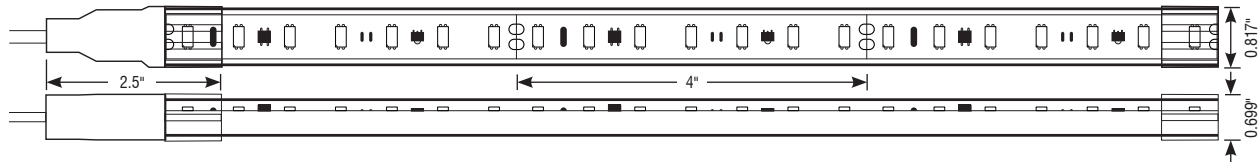

MODEL:	RXT-24K	RXT-27K	RXT-30K	RXT-35K	RXT-40K	RXT-50K
KELVIN	2400K	2700K	3000K	3500K	4000K	5000K
LUMENS	260 lm/ft	272 lm/ft	279 lm/ft	301 lm/ft	320 lm/ft	326 lm/ft

PRODUCT FEATURES

- Supports Title 24 JA8-2016 Compliance
- 120V Line Voltage
- Integral AC/DC Rectifier
- ELV Dimmable
- Hardwire or Plug-in Installation
- IP65
- Refresh Rate of 120Hz

SPECIFICATIONS

Model	RXT
Input Voltage	120 VAC
Watts per Foot	4W/ft
Beam Spread	120°
Max Run Length	100ft per Power Feed
Productions Intervals	4" (101.6mm)
End Cap Dimensions	0.817" (20.75mm) × 0.699" (17mm) × 2.5" (63.5mm)
Orex Dimensions	0.68" (17.3mm) × 0.53" (13.5mm)
CRI	90+
Diode	3056
Dimming Options	ELV
Temp Range	-4°F (-20°C) to 104°F (40°C)

ORDERING INFORMATION

Example: RXT-24K-300-HW72-120V-42FT-6IN

Item	CCT	Output	Power Feed	Voltage	Feet	Inches
RXT		300		120V	_ FT	_ IN
RXT—OREX T24	24K—2400K 27K—2700K 30K—3000K 35K—3500K 40K—4000K 50K—5000K	300—300 lm/ft	HW72—72" Hardwire Feed HW240—240" Hardwire Feed PL72—72" Plug-in Feed PL144—144" Plug-in Feed <i>Consult Following Page For Power Feed Options</i>	120V	Length — Enter number of feet, followed by any remaining inches. (i.e. 42FT-6IN) <i>Max run length is 100ft per Power Feed for 250 output.</i>	

Conforms to ANSI/UL Standard 1598
Certified to CAN/CSA Standard C22.2 No. 250.0






OREX™ T24 FACTORY POWER AND CONNECT OPTIONS

LINE VOLTAGE | 120HZ REFRESH RATE | TITLE 24 EDITION

Fixture Type: _____


Project: _____

Location: _____

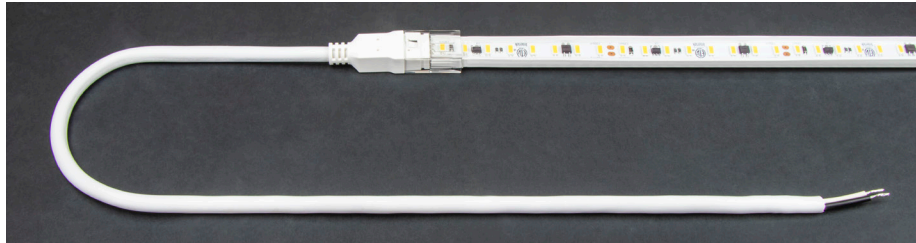

FACTORY INSTALLED HARDWIRE POWER FEED

Specify 72" or 240" length in component builder on preceding page.

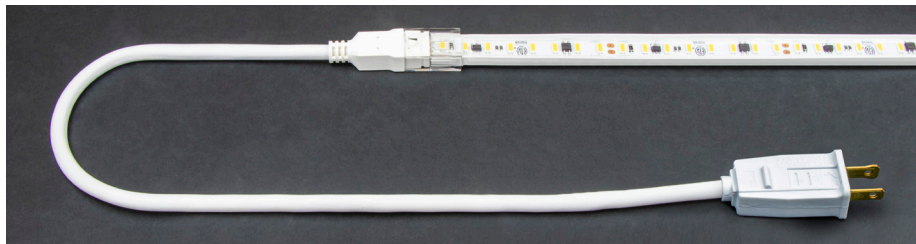


FACTORY INSTALLED PLUG-IN POWER FEED

Specify 72" or 144" length in component builder on preceding page.



FACTORY INSTALLED JUMP CABLES (CONSULT FACTORY FOR CONFIGURATION)

Available in 6", 24", and 48" cable lengths.

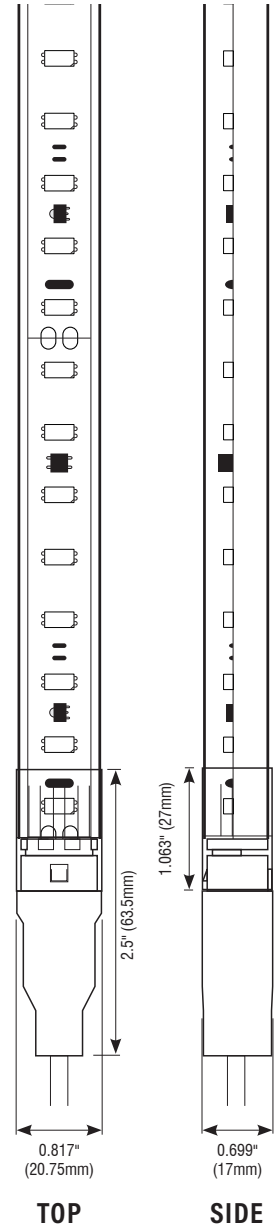



OREX™ T24 MOUNTING OPTIONS


LINE VOLTAGE | LINEAR LED LIGHTING | TITLE 24 COMPLIANT

Fixture Type: _____

Project: _____


Location: _____

MOUNTING CLIPS (10 PER PACK)




SPECIFICATIONS

Model	RXT-CLP-F1-PAK-P
Material	Polycarbonate
Length	0.67" (17mm)
Width	0.85" (21.5mm)
Height	0.75" (19mm)



PLASTIC MOUNTING BASE



SPECIFICATIONS

Model	RXT-CH-PL-2M
Material	Polycarbonate
Length	78.74" (2m)
Width	0.79" (20mm)
Height	0.787" (20mm)

