


FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____

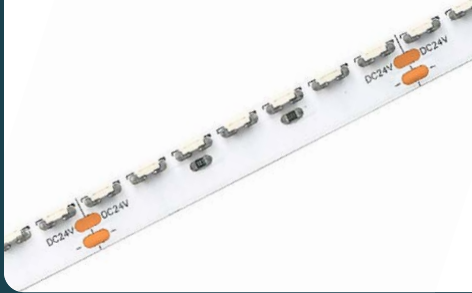

Side Emitting (Indoor)

LINEAR LED LIGHTING




I Features

- Side Emitting Diode
- 3/4" Bend Diameter
- Dimmable
- 5-year Warranty
- 50,000 Hour Life
- UL-listed for Indoor
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

I Series Spec

Series	SE
Input Voltage	24V DC/Constant Voltage
Watts per Foot	2 W/ft @ Max Run Length
Beam Spread	120°
Max Run Length	Power Every 20ft
Cut Intervals	1.97" (50mm)
Dimensions	0.31" (8.0mm) × 0.09" (2.4mm)
CRI	90+
Diode	4020
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-4°F (-20°C) to 113°F (45°C)

I Product Code Builder

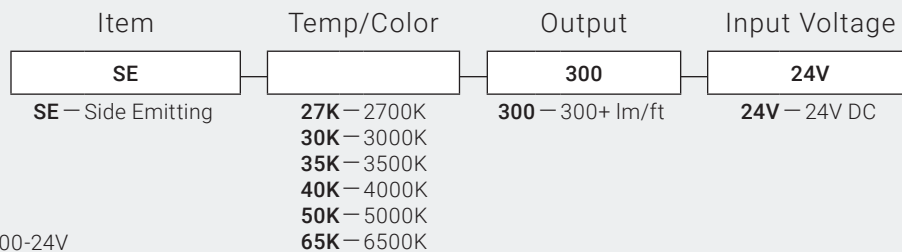


Example: SE-27K-300-24V

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 NO. 250.0



I Dimensions

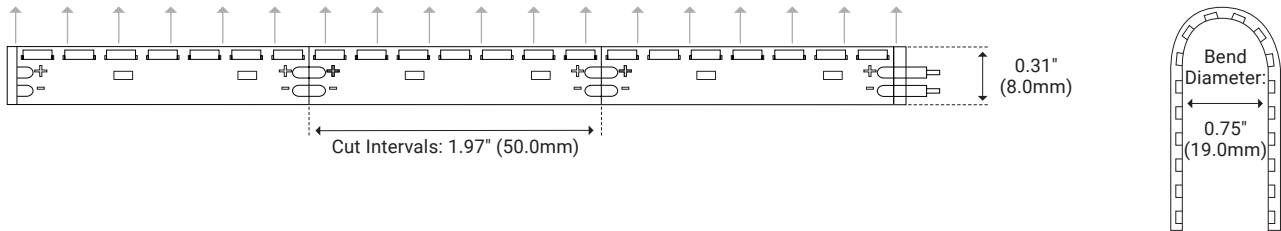

I Series Data

Kelvin	2700K	3000K	3500K	4000K	5000K	6500K
Lumens/ft	306 lm/ft	323 lm/ft	323 lm/ft	340 lm/ft	340 lm/ft	340 lm/ft

I Power Chart

Feet	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Watts	2.9	5.7	8.3	11.0	13.5	15.9	18.3	20.5	22.7	24.8	26.8	28.7	30.5	32.3	33.9	35.5	37.0	38.4	39.7	40.9