




# SIGNWAVE® 3 (INDOOR/OUTDOOR)

SW3-SERIES | FLEXIBLE LIGHTING SYSTEM

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

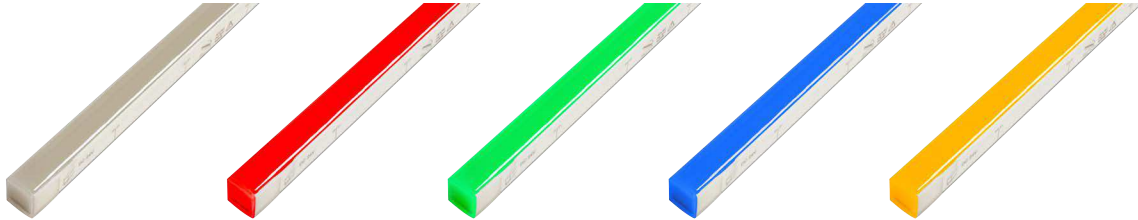

Color/Kelvin	WHITE (Specify CCT)	RED	GREEN	BLUE	AMBER	RGBW	CT (2500+5000K)
Wavelength	N/A	620-630nm	520-530nm	465-475nm	585-595nm	N/A	N/A
Wattage	3.7W/ft	2.2W/ft	3.7W/ft	3.7W/ft	2.2W/ft	4.6W/ft	3.7W/ft
Power Feed	Every 26ft	Every 39ft	Every 26ft	Every 26ft	Every 39ft	Every 21ft	Every 26ft
Production Intervals	2.188"	3.25"	2.188"	2.188"	3.25"	3.25"	3.25"

## PRODUCT FEATURES

- Dimmable
- 50,000 hour life
- Flat profile for streamline projects
- Horizontal or vertical bending option
- IP67 or IP68 option
- UL-listed for indoor and outdoor use
- Factory-installed power feed
- Injection-molded flush end caps
- For use with 24V power supplies


## SPECIFICATIONS

Series	SW3 - Signwave® 3
Input Voltage	24V DC
Max Run Length	Unlimited, Refer to <b>Power Feed</b> Above
Lumens	162 Lm/ft (White)
Beam Angle	160°
Dimensions	0.625"(16mm) × 0.688"(17mm)
CRI	80+
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-4°F (-20°C) to 113°F (45°C)




## BENDING OPTIONS & PROFILE DIMENSIONS

### Horizontal

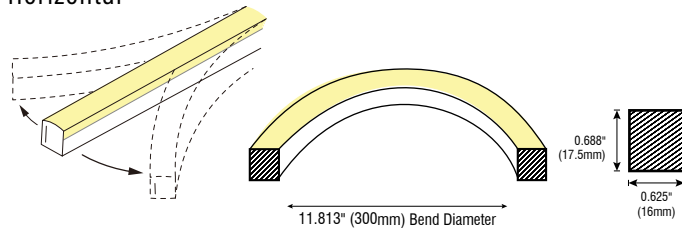

### Vertical

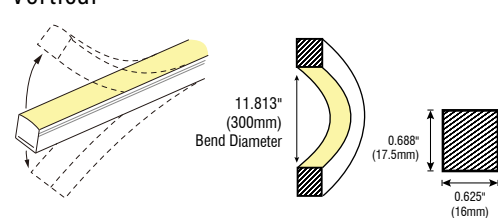

Conforms to ANSI/UL Standard 2108  
Certified to CAN/CSA Standard C22.2 No. 250.0







# SIGNWAVE® 3 (INDOOR/OUTDOOR)

SW3-SERIES | FLEXIBLE LIGHTING SYSTEM

## IP67 OPTIONS

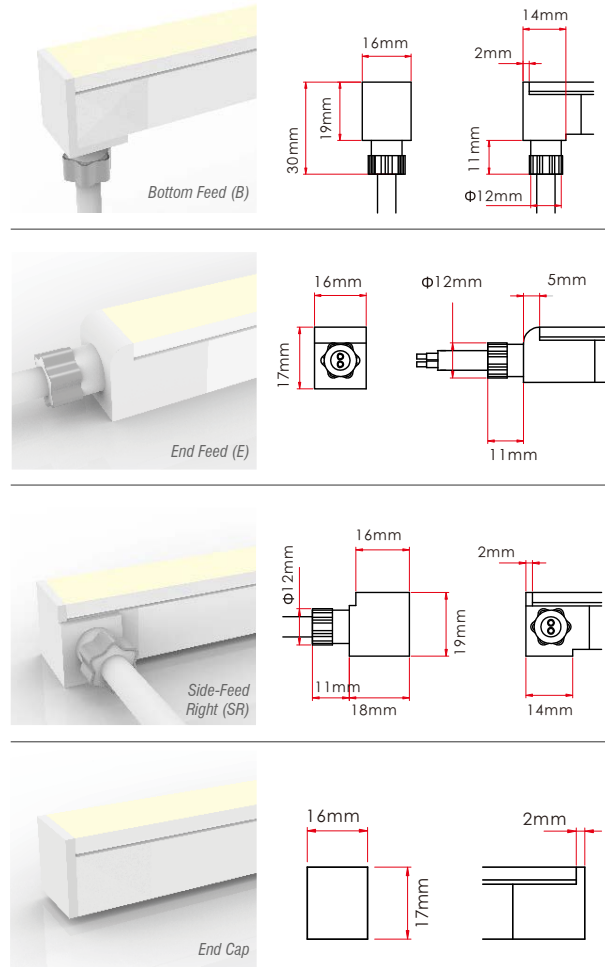

## IP68 OPTIONS

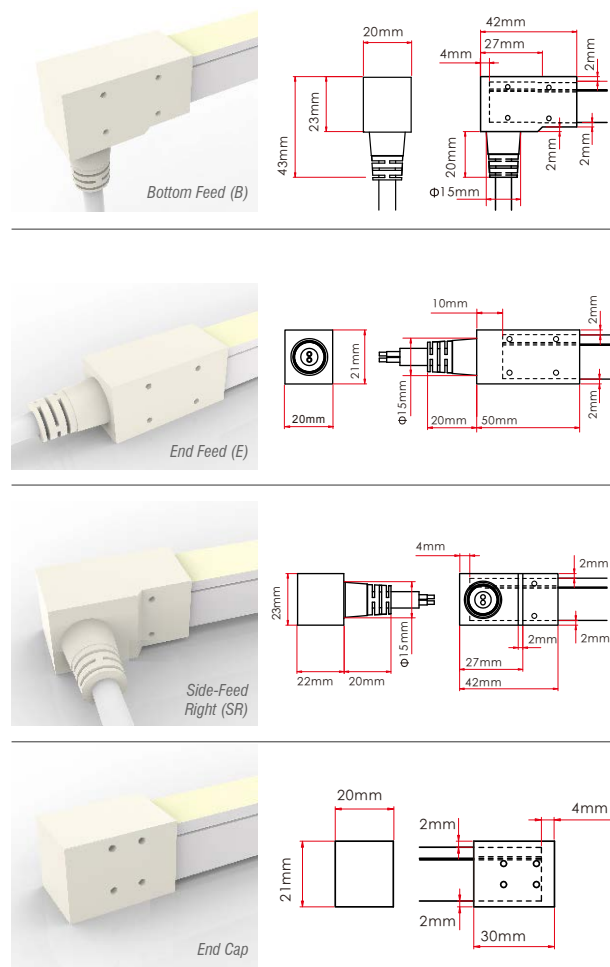

## ORDERING INFORMATION

Example: **SW3-36-RGBW-VR-E-S-IP67**



Series	Length (Unlimited)	Color	Bending	Feed Point	Feed Length	Rating
<b>SW3</b>						
SW3	Inches	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K <b>45K</b> - 4500K <b>50K</b> - 5000K <b>RD</b> - Red <b>GRN</b> - Green <b>BL</b> - Blue <b>AM</b> - Amber <b>RGBW</b> - Color Changing <b>CT</b> - Color Tuning	<b>VR</b> - Vertical <b>HZ</b> - Horizontal (Not available in RGBW)	<b>B</b> - Bottom Feed <b>SL</b> - Side-Feed Left <b>SR</b> - Side-Feed Right <b>E</b> - End Feed	<b>S</b> - Standard (118 inch) <b>Inches</b> - Custom length (inches).	<b>IP67</b> <b>IP68</b>



# SIGNWAVE® NARROW VIEW ACCESSORIES



FOR SIGNWAVE™ 3 SERIES

## ALUMINUM SERRATED CHANNEL

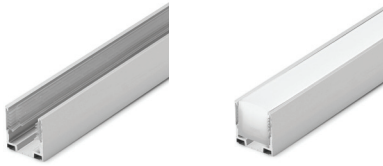


Model	SW-K-AL-CH-SR-2M
Material	Aluminum
Length	78.75" (2m)
Width	0.80" (20.2mm)
Height	0.82" (20.8mm)
Internal Width	0.64" (16.3mm)

## ALUMINUM SERRATED CLIP

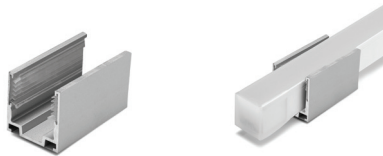


Model	SW-K-CLP-AL-SR
Material	Aluminum
Length	0.79" (20mm)
Width	0.80" (20.2mm)
Height	0.82" (20.8mm)
Internal Width	0.64" (16.3mm)

## ALUMINUM SERRATED FLEX CHANNEL



Model	SW-K-CH-AL-FLX-1M
Material	Aluminum
Length	39.3" (1m)
Width	0.80" (20.2mm)
Height	0.82" (20.8mm)
Internal Width	0.64" (16.3mm)

## SIDE MOUNTING BRACKET



Model	SW-CLP-RA
Material	Aluminum
Length	0.79" (20mm)
Width	0.98" (25mm)
Height	2.75" (70mm)