




SIGNWAVE® 5 (INDOOR/OUTDOOR)

SW5-SERIES | FLEXIBLE LIGHTING SYSTEM

Fixture Type: _____

Project: _____

Location: _____

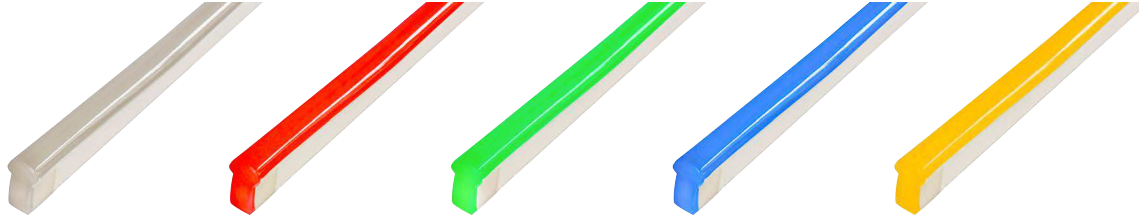


Color/Kelvin	WHITE (Specify CCT)	RED	GREEN	BLUE	AMBER	RGBW	CT (2500+5000K)
Wavelength	N/A	620-630nm	520-530nm	465-475nm	585-595nm	N/A	N/A
Wattage	3.7W/ft	2.2W/ft	3.7W/ft	3.7W/ft	2.2W/ft	4.6W/ft	3.7W/ft
Power Feed	Every 26ft	Every 39ft	Every 26ft	Every 26ft	Every 39ft	Every 21ft	Every 26ft
Production Intervals	3.25"	4.938"	3.25"	3.25"	4.938"	4.938"	3.25"

PRODUCT FEATURES

- Dimmable
- 50,000 hour life
- Domed profile for large beam angle
- UL-listed for indoor and outdoor use
- IP67 or IP68 option
- Factory-installed power feed
- Injection-molded flush end caps
- For use with 24V power supplies

SPECIFICATIONS


Series	SW5 - Signwave® 5
Input Voltage	24V DC
Lumens	162 Lm/ft
Max Run Length	Unlimited, Refer to Power Feed Above
Beam Angle	320°
Dimensions	0.438"(11.5mm) × 1.125"(29mm)
CRI	80+
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-4°F (-20°C) to 113°F (45°C)



Dry Wire ferrule located 115mm (+/- 5mm) from the cable connector. Protects against damage from water ingress inside cable wire.

Included in every run.

DOME PROFILE DIMENSIONS

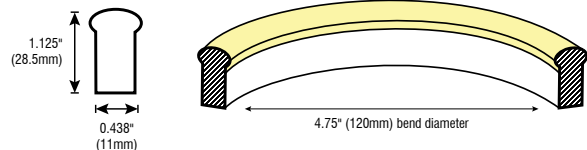

Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.0







SIGNWAVE® 5 (INDOOR/OUTDOOR)

SW5-SERIES | FLEXIBLE LIGHTING SYSTEM

IP67 OPTIONS

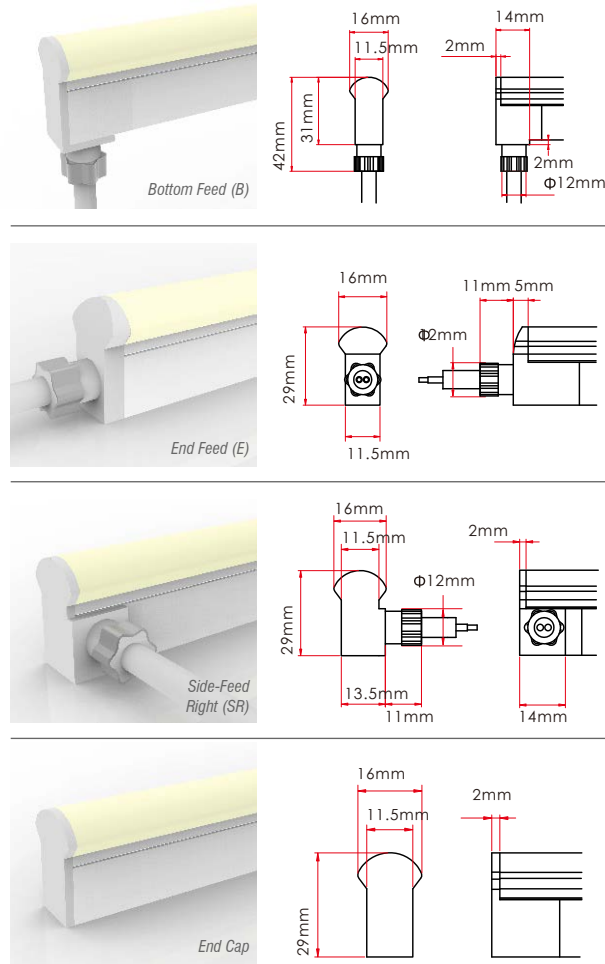

IP68 OPTIONS

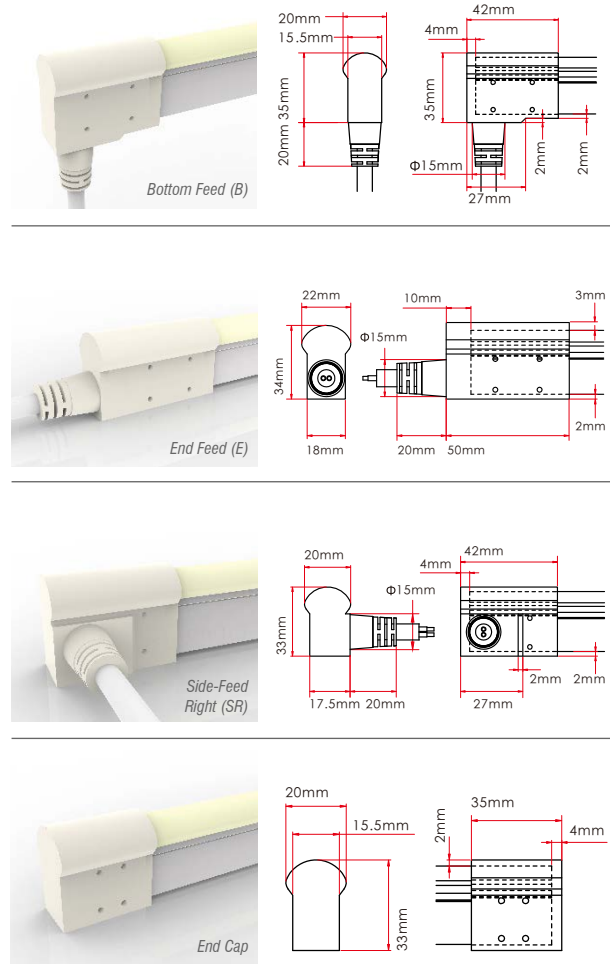

ORDERING INFORMATION

Example: SW5-36-CT-SL-24-IP68



Series	Length (Unlimited)	Color	Feed Point	Feed Length	Rating
SW5					
SW5	Inches	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 45K - 4500K 50K - 5000K RD - Red GRN - Green BL - Blue AM - Amber RGBW - Color Changing CT - Color Tuning	B - Bottom Feed SL - Side-Feed Left SR - Side-Feed Right E - End Feed	S - Standard (118 inch) Inches - Custom length (inches).	IP67 IP68



SIGNWAVE® WIDE VIEW ACCESSORIES



FOR SIGNWAVE™ 1, 2, 5, & 7 SERIES

ALUMINUM SERRATED CHANNEL

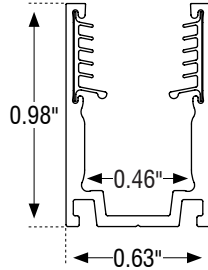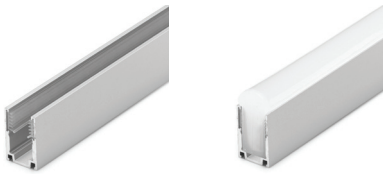



Model	SW-E-AL-CH-SR-2M
Material	Aluminum
Length	78.75" (2m)
Width	0.63" (15.9mm)
Height	0.98" (24.8mm)
Internal Width	0.46" (11.8mm)

ALUMINUM SERRATED CLIP

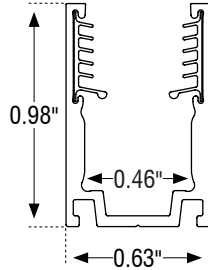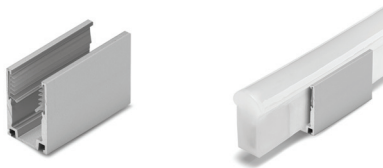


Model	SW-E-CLP-AL-SR
Material	Aluminum
Length	0.79" (20mm)
Width	0.63" (15.9mm)
Height	0.98" (24.8mm)
Internal Width	0.46" (11.8mm)

ALUMINUM SERRATED FLEX CHANNEL

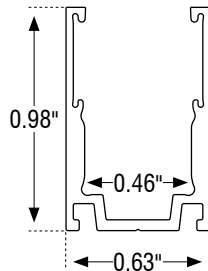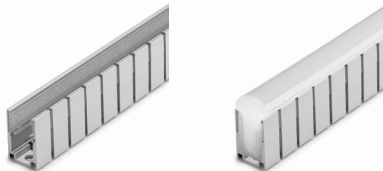

Model	SW-E-CH-AL-FLX-1M
Material	Aluminum
Length	39.3" (1m)
Width	0.63" (15.9mm)
Height	0.98" (24.8mm)
Internal Width	0.46" (11.8mm)

SIDE MOUNTING BRACKET



Model	SW-CLP-RA
Material	Aluminum
Length	0.78" (20mm)
Width	0.98" (25mm)
Height	2.75" (70mm)