

FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____



Uniform Static White (Indoor)

INDOOR WHITE LIGHT TAPE



I Description

Our Uniform Static White series ensures single-bin color consistency across every output option and eliminates diode imaging when paired with any Kelvix channel.


I Features

- Uses U2835 Diode
- Create a Custom Fixture with Kelvix Channels
- 5-Year Warranty
- UL-Listed
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies
- Dimmable Using Kelvix Power Supplies
- Offered 1-step, 2-step, and 3-step SDCM

I Series Spec

Series	UNI1-WL / UNI2-WL / UNI3-WL
Temp/Colors*	1800K–6500K
Input Voltage	24V DC/Constant Voltage
Beam Spread	120°
CRI	90–98
SDCM	1-Step, 2-Step, and 3-Step
Diode	2835
Diode Pitch	0.17" (4.3mm)
Cut Intervals	1.31" (33.3mm)
Dimensions	0.47" (12.0mm) × 0.07" (1.8mm)
Operating Temp.	-4°F (-20°C) to 140°F (60°C)
Storage Temp.	-4°F (-20°C) to 158°F (70°C)

I Dimensions

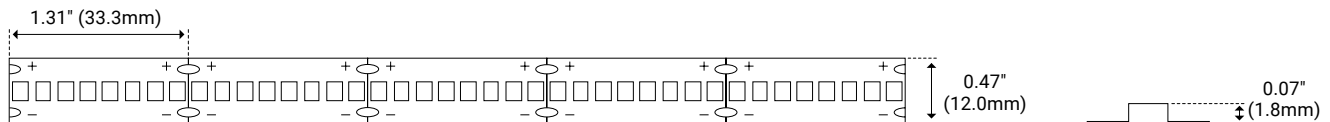

* Customizable—Consult Factory
±5% tolerance for all listed data

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 NO. 250.0



I Product Code Builder

Series	Location	Output*	Temp/ Color*	Voltage	Modification
Series	Location	Output*	Temp/ Colors*	Voltage	Modification
UNI1-WL – Uniform Static White 1-Step UNI2-WL – Uniform Static White 2-Step UNI3-WL – Uniform Static White 3-Step	I – Indoor	100 – 100 lm/ft 200 – 200 lm/ft 300 – 300 lm/ft 400 – 400 lm/ft 500 – 500 lm/ft 750 – 750 lm/ft 1000 – 1000 lm/ft 1250 – 1250 lm/ft 1500 – 1500 lm/ft	18K – 1800K 22K – 2200K 24K – 2400K 27K – 2700K 30K – 3000K 35K – 3500K 40K – 4000K 50K – 5000K 65K – 6500K	24V – 24V DC	NA – None

Example: UNI1-WL-I-100-18K-24V-NA

I Series Data

		100 (lm/ft)	200 (lm/ft)	300 (lm/ft)	400 (lm/ft)	500 (lm/ft)	750 (lm/ft)	1000 (lm/ft)	1250 (lm/ft)	1500 (lm/ft)
1-Step & 2-Step	1800K	76	174	271	357	409	613	778	1000	1178
	2200K	93	211	328	433	495	722	917	1178	1387
	2400K	96	218	340	448	513	764	970	1246	1468
	2700K	99	226	351	463	530	806	1023	1315	1549
	3000K	108	245	382	503	576	839	1066	1369	1613
	3500K	128	292	455	599	685	915	1162	1493	1758
	4000K	114	260	405	534	610	906	1151	1479	1742
	5000K	115	263	409	539	616	923	1172	1506	1774
	6500K	116	265	413	544	622	932	1183	1520	1790
	Wattage ¹ (per ft)	0.8	1.7	2.5	3.6	4.0	6.4	8.5	11.6	14.4
Efficacy (lm/W)	136	144	156	140	145	132	125	118	112	
Max Run Length (ft)	46	36	29	24	20	16	12	9	7	

¹Power consumption based on average wattage per foot. Refer to Power Chart on page 5–6 for details.
±5% tolerance for all listed data



I Series Data



		100 (lm/ft)	200 (lm/ft)	300 (lm/ft)	400 (lm/ft)	500 (lm/ft)	750 (lm/ft)	1000 (lm/ft)	1250 (lm/ft)	1500 (lm/ft)
3-Step	1800K	83	147	218	303	347	469	603	791	925
	2200K	117	211	313	436	498	746	958	1257	1471
	2400K	125	226	334	465	532	805	1033	1356	1587
	2700K	131	235	348	485	554	788	1012	1328	1553
	3000K	132	238	351	489	560	838	1077	1413	1653
	3500K	133	240	355	494	565	880	1130	1483	1735
	4000K	137	247	365	509	582	897	1152	1512	1768
	5000K	143	257	379	529	605	913	1173	1540	1801
	6500K	140	252	372	519	593	888	1141	1497	1752
	Wattage ¹ (per ft)	0.7	1.3	2.0	2.6	3.4	4.4	5.6	7.2	8.6
	Efficacy (lm/W)	144	147	150	150	140	162	173	164	166
Max Run Length (ft)	46	30	25	22	19	17	14	11	11	

I Power Feed Accessories

Lead



Unit Number	Length*
FML-2C-1	12.00" (305.0mm)
FML-2C-2	24.00" (0.60m)
FML-2C-3	36.00" (0.91m)
FML-2C-6	72.00" (1.82m)
FML-2C-12	144.00" (3.65m)
FML-2C-15	180.00" (4.57m)
FML-2C-20	240.00" (6.09m)





For leads on both input and output, specify 2x FML-2C-xx per run.

Lead with DC Plug



Unit Number	Length*
FML-2C-DC-1-M	12.00" (305.0mm)
FML-2C-DC-1-F	12.00" (305.0mm)
FML-2C-DC-6-M	72.00" (1.82m)
FML-2C-DC-6-F	72.00" (1.82m)
FML-2C-DC-10-M	120.00" (3.04m)
FML-2C-DC-10-F	120.00" (3.04m)



* Customizable—Consult Factory

¹Power consumption based on average wattage per foot. Refer to Power Chart on page 5–6 for details.

±5% tolerance for all listed data




I Power Feed Accessories

Connector



Unit Number	Length*
FMC-2C-1.5I	1.50" (38.0mm)
FMC-2C-3I	3.00" (76.0mm)
FMC-2C-6I	6.00" (152.0mm)
FMC-2C-9I	9.00" (228.0mm)
FMC-2C-1	12.00" (305.0mm)
FMC-2C-2	24.00" (0.60m)




I Field Connectors/Couplers

Wire Lead

This is an instant 6 foot snap-on power feed cable.



Unit Number	UNI-WL-I-WL12-6
Feed Length	72.0" (1.82m)
Length	0.54" (13.6mm)
Width	0.54" (13.7mm)
Height	0.17" (4.2mm)

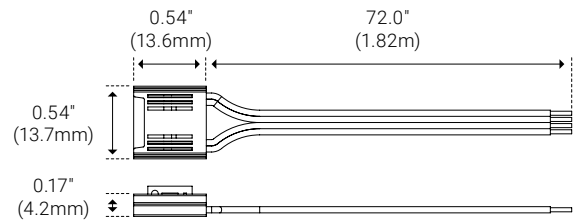


Corner Connector

This snap-on connector will connect two pieces of LED together but also provide separation so you can curve around corners or bridge gaps.



Unit Number	UNI-WL-I-CC12-3I
Feed Length	2.83" (71.9mm)
Length	0.54" (13.6mm)
Width	0.54" (13.7mm)
Height	0.17" (4.2mm)

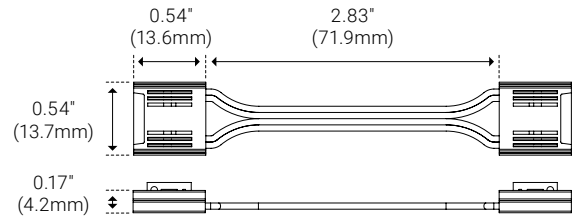


Straight Coupler

This snap-on coupler quickly connects two runs of tape together.



Unit Number	UNI-WL-I-SC12
Length	0.54" (13.6mm)
Width	0.54" (13.7mm)
Height	0.17" (4.2mm)

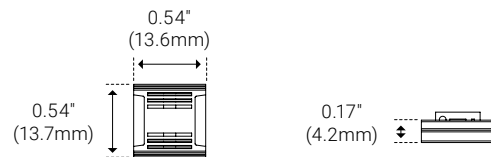

±5% tolerance for all listed data



I Power Chart (1-Step & 2-Step)

		100 (lm/ft)	200 (lm/ft)	300 (lm/ft)	400 (lm/ft)	500 (lm/ft)	750 (lm/ft)	1000 (lm/ft)	1250 (lm/ft)	1500 (lm/ft)
Watts	1 ft	0.8	1.8	2.6	3.9	4.2	6.9	9.2	12.3	15.1
	2 ft	1.6	3.7	5.1	7.8	8.5	13.8	18.2	24.5	30.0
	3 ft	2.4	5.5	7.7	11.6	12.7	20.5	27.0	36.2	43.8
	4 ft	3.3	7.4	10.0	15.5	16.7	27.1	35.4	47.8	56.8
	5 ft	4.1	9.2	12.5	19.2	20.8	33.3	43.7	57.8	67.9
	6 ft	4.9	11.0	15.0	22.9	24.7	39.5	51.3	67.4	80.1
	7 ft	5.8	12.8	17.5	26.7	28.6	45.4	58.8	76.3	91.6
	8 ft	6.6	14.5	20.2	30.2	32.4	51.0	65.9	85.2	-
	9 ft	7.4	16.3	22.9	33.7	36.0	56.3	72.2	92.9	-
	10 ft	8.2	18.0	25.5	37.0	40.1	61.5	78.2	-	-
	11 ft	9.0	19.8	28.0	40.3	43.6	66.5	84.0	-	-
	12 ft	9.8	21.5	30.4	43.5	46.9	71.1	89.0	-	-
	13 ft	10.6	23.1	32.9	46.6	50.2	75.6	-	-	-
	14 ft	11.4	24.8	35.3	49.5	51.7	79.8	-	-	-
	15 ft	12.1	26.4	37.6	52.3	56.1	83.7	-	-	-
	16 ft	12.9	28.0	39.9	55.2	58.9	87.0	-	-	-
	17 ft	13.7	29.5	42.1	57.8	61.7	-	-	-	-
	18 ft	14.4	31.0	44.2	60.4	64.2	-	-	-	-
	19 ft	15.2	32.6	46.3	62.8	66.6	-	-	-	-
	20 ft	15.9	34.0	48.3	65.0	69.2	-	-	-	-
	21 ft	16.7	35.4	50.3	67.3	-	-	-	-	-
	22 ft	17.4	36.8	52.2	69.4	-	-	-	-	-
	23 ft	18.2	38.2	54.0	71.4	-	-	-	-	-
	24 ft	18.9	39.5	55.8	73.4	-	-	-	-	-
	25 ft	19.6	40.8	57.4	-	-	-	-	-	-
	26 ft	20.3	42.1	59.1	-	-	-	-	-	-
	27 ft	21.0	43.3	60.6	-	-	-	-	-	-
	28 ft	21.7	44.5	62.2	-	-	-	-	-	-
	29 ft	22.4	45.7	63.5	-	-	-	-	-	-
	30 ft	23.0	46.8	-	-	-	-	-	-	-
	31 ft	23.6	48.0	-	-	-	-	-	-	-
	32 ft	24.3	49.1	-	-	-	-	-	-	-
	33 ft	24.9	50.1	-	-	-	-	-	-	-
	34 ft	25.6	51.1	-	-	-	-	-	-	-
	35 ft	26.2	52.1	-	-	-	-	-	-	-
	36 ft	26.8	53.1	-	-	-	-	-	-	-
	37 ft	27.4	-	-	-	-	-	-	-	-
	38 ft	28.0	-	-	-	-	-	-	-	-
	39 ft	28.6	-	-	-	-	-	-	-	-
	40 ft	29.2	-	-	-	-	-	-	-	-
	41 ft	29.7	-	-	-	-	-	-	-	-
	42 ft	30.3	-	-	-	-	-	-	-	-
	43 ft	30.8	-	-	-	-	-	-	-	-
	44 ft	31.3	-	-	-	-	-	-	-	-
	45 ft	31.9	-	-	-	-	-	-	-	-
	46 ft	32.4	-	-	-	-	-	-	-	-

±5% tolerance for all listed data



I Power Chart (3-Step)

		100 (lm/ft)	200 (lm/ft)	300 (lm/ft)	400 (lm/ft)	500 (lm/ft)	750 (lm/ft)	1000 (lm/ft)	1250 (lm/ft)	1500 (lm/ft)
Watts	1 ft	0.7	1.5	2.2	3	3.9	5.3	6.7	8.6	10.7
	2 ft	1.5	2.9	4.6	6.1	7.9	10.4	13	16.6	20.5
	3 ft	2.3	4.5	6.7	9	11.7	15.5	19.2	24.1	29.6
	4 ft	3.1	5.9	8.9	11.8	15.4	20.2	25	31.3	38.1
	5 ft	3.8	7.4	11	14.6	18.6	24.6	29.5	37.4	44.8
	6 ft	4.6	8.8	12.9	17.1	21.9	28.5	34.8	43.2	51.6
	7 ft	5.4	10.1	14.9	19.6	24.8	32.6	39.4	48	56.9
	8 ft	6	11.5	16.8	22.1	28	36.2	43.4	52.8	61.5
	9 ft	6.9	12.7	18.7	24.5	31.1	39.7	47.3	57.4	66.3
	10 ft	7.6	14	20.5	26.7	33.8	43.6	51.3	61.1	70.3
	11 ft	8.3	15.2	22.3	29	36.2	46.5	54.5	65.9	74.4
	12 ft	9	16.4	24.1	31.1	38.5	49.3	57.8	-	-
	13 ft	9.7	17.8	25.8	33	40.7	51.4	60.5	-	-
	14 ft	10.3	18.9	27.4	33.4	42.7	53.8	62.9	-	-
	15 ft	11	19.9	28.7	36.8	44.7	56.9	-	-	-
	16 ft	11.8	21.1	30.4	38.7	46.8	59.3	-	-	-
	17 ft	12.4	22.3	31.8	40.2	48.9	61.7	-	-	-
	18 ft	13	23.3	33.4	41.9	50.3	-	-	-	-
	19 ft	13.7	24.3	34.7	43.5	52.1	-	-	-	-
	20 ft	14.2	25.5	35.8	45	-	-	-	-	-
	21 ft	14.9	26.4	36.9	46	-	-	-	-	-
	22 ft	15.4	27.5	37.3	47.6	-	-	-	-	-
	23 ft	16.1	28.3	38	-	-	-	-	-	-
	24 ft	16.6	29.3	39	-	-	-	-	-	-
	25 ft	17.2	30.1	40.3	-	-	-	-	-	-
	26 ft	17.8	30.8	-	-	-	-	-	-	-
	27 ft	18.4	31.6	-	-	-	-	-	-	-
	28 ft	19	32.4	-	-	-	-	-	-	-
	29 ft	19.5	33.4	-	-	-	-	-	-	-
	30 ft	20.1	34.2	-	-	-	-	-	-	-
	31 ft	20.7	-	-	-	-	-	-	-	-
	32 ft	21.1	-	-	-	-	-	-	-	-
	33 ft	21.7	-	-	-	-	-	-	-	-
	34 ft	22.2	-	-	-	-	-	-	-	-
	35 ft	22.7	-	-	-	-	-	-	-	-
	36 ft	23.2	-	-	-	-	-	-	-	-
	37 ft	23.7	-	-	-	-	-	-	-	-
	38 ft	24.2	-	-	-	-	-	-	-	-
	39 ft	24.6	-	-	-	-	-	-	-	-
	40 ft	25.1	-	-	-	-	-	-	-	-
	41 ft	25.5	-	-	-	-	-	-	-	-
	42 ft	26	-	-	-	-	-	-	-	-
	43 ft	26.3	-	-	-	-	-	-	-	-
	44 ft	26.8	-	-	-	-	-	-	-	-
	45 ft	27.2	-	-	-	-	-	-	-	-
	46 ft	27.4	-	-	-	-	-	-	-	-

±5% tolerance for all listed data



I TM30 Data


1250 lm/ft		CRI	Rf	Rg	R9
1-Step	1800K	96	94	100	74
	2200K	95	94	104	92
	2400K	96	95	104	93
	2700K	96	95	104	98
	3000K	97	95	103	98
	3500K	97	95	103	98
	4000K	98	95	103	97
	5000K	97	95	104	97
6500K	97	94	103	97	

1250 lm/ft		CRI	Rf	Rg	R9
2-Step	1800K	95	91	105	78
	2200K	96	95	103	92
	2400K	96	95	104	98
	2700K	96	95	104	98
	3000K	97	95	102	98
	3500K	97	95	102	98
	4000K	98	95	103	99
	5000K	97	95	104	97
	6500K	97	94	102	97

1000 lm/ft		CRI	Rf	Rg	R9
3-Step	1800K	93	92	98	64
	2200K	94	92	105	80
	2400K	94	90	106	72
	2700K	94	92	106	94
	3000K	95	93	104	86
	3500K	97	92	100	80
	4000K	98	92	100	91
	5000K	90	90	103	51
	6500K	90	88	101	50

I Polar Plot

UNI1-WL-I-300-30K

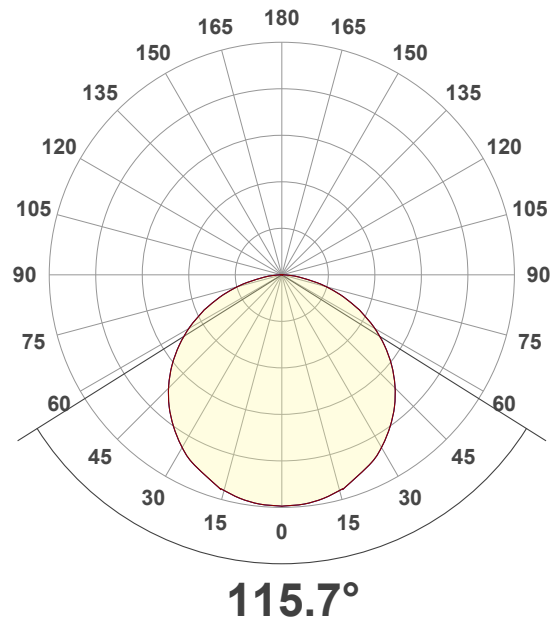

±5% tolerance for all listed data



I Cone of Light

UNI1-WL-I-100-30K / UNI2-WL-I-100-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	68.1 fc	3.2 ft
2.0 ft	17.0 fc	6.3 ft
3.0 ft	7.6 fc	9.5 ft
4.0 ft	4.3 fc	12.7 ft
5.0 ft	2.7 fc	15.9 ft
6.0 ft	1.9 fc	19.0 ft
7.0 ft	1.4 fc	22.2 ft
8.0 ft	1.1 fc	25.4 ft
9.0 ft	0.8 fc	28.5 ft
10.0 ft	0.7 fc	31.7 ft

UNI1-WL-I-200-30K / UNI2-WL-I-200-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	144.7 fc	3.2 ft
2.0 ft	36.2 fc	6.4 ft
3.0 ft	16.1 fc	9.5 ft
4.0 ft	9.0 fc	12.7 ft
5.0 ft	5.8 fc	15.9 ft
6.0 ft	4.0 fc	19.1 ft
7.0 ft	3.0 fc	22.2 ft
8.0 ft	2.3 fc	25.4 ft
9.0 ft	1.8 fc	28.6 ft
10.0 ft	1.4 fc	31.8 ft

UNI1-WL-I-300-30K / UNI2-WL-I-300-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	246.7 fc	3.2 ft
2.0 ft	61.7 fc	6.3 ft
3.0 ft	27.4 fc	9.5 ft
4.0 ft	15.4 fc	12.7 ft
5.0 ft	9.9 fc	15.8 ft
6.0 ft	6.9 fc	19.0 ft
7.0 ft	5.0 fc	22.2 ft
8.0 ft	3.9 fc	25.3 ft
9.0 ft	3.0 fc	28.5 ft
10.0 ft	2.5 fc	31.7 ft

UNI1-WL-I-400-30K / UNI2-WL-I-400-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	307.3 fc	3.2 ft
2.0 ft	76.8 fc	6.3 ft
3.0 ft	34.1 fc	9.5 ft
4.0 ft	19.2 fc	12.7 ft
5.0 ft	12.3 fc	15.8 ft
6.0 ft	8.5 fc	19.0 ft
7.0 ft	6.3 fc	22.2 ft
8.0 ft	4.8 fc	25.4 ft
9.0 ft	3.8 fc	28.5 ft
10.0 ft	3.1 fc	31.7 ft

UNI1-WL-I-500-30K / UNI2-WL-I-500-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	387.0 fc	3.1 ft
2.0 ft	96.8 fc	6.2 ft
3.0 ft	43.0 fc	9.3 ft
4.0 ft	24.2 fc	12.4 ft
5.0 ft	15.5 fc	15.6 ft
6.0 ft	10.8 fc	18.7 ft
7.0 ft	7.9 fc	21.8 ft
8.0 ft	6.0 fc	24.9 ft
9.0 ft	4.8 fc	28.0 ft
10.0 ft	3.9 fc	31.1 ft

UNI1-WL-I-750-30K / UNI2-WL-I-750-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	530.8 fc	3.2 ft
2.0 ft	132.7 fc	6.3 ft
3.0 ft	59.0 fc	9.5 ft
4.0 ft	33.2 fc	12.6 ft
5.0 ft	21.2 fc	15.8 ft
6.0 ft	14.7 fc	18.9 ft
7.0 ft	10.8 fc	22.1 ft
8.0 ft	8.3 fc	25.3 ft
9.0 ft	6.6 fc	28.4 ft
10.0 ft	5.3 fc	31.6 ft

±5% tolerance for all listed data



I Cone of Light

UNI1-WL-I-1000-30K / UNI2-WL-I-1000-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	647.9 fc	3.2 ft
2.0 ft	162.0 fc	6.3 ft
3.0 ft	72.0 fc	9.5 ft
4.0 ft	40.5 fc	12.7 ft
5.0 ft	25.9 fc	15.8 ft
6.0 ft	18.0 fc	19.0 ft
7.0 ft	13.2 fc	22.2 ft
8.0 ft	10.1 fc	25.3 ft
9.0 ft	8.0 fc	28.5 ft
10.0 ft	6.5 fc	31.6 ft

UNI1-WL-I-1250-30K / UNI2-WL-I-1250-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	882.2 fc	3.1 ft
2.0 ft	220.6 fc	6.3 ft
3.0 ft	98.0 fc	9.4 ft
4.0 ft	55.1 fc	12.6 ft
5.0 ft	35.3 fc	15.7 ft
6.0 ft	24.5 fc	18.8 ft
7.0 ft	18.0 fc	22.0 ft
8.0 ft	13.8 fc	25.1 ft
9.0 ft	10.9 fc	28.3 ft
10.0 ft	8.8 fc	31.4 ft

UNI1-WL-I-1500-30K / UNI2-WL-I-1500-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	981.7 fc	3.2 ft
2.0 ft	245.4 fc	6.3 ft
3.0 ft	109.1 fc	9.5 ft
4.0 ft	61.4 fc	12.7 ft
5.0 ft	39.3 fc	15.8 ft
6.0 ft	27.3 fc	19.0 ft
7.0 ft	20.0 fc	22.2 ft
8.0 ft	15.3 fc	25.3 ft
9.0 ft	12.1 fc	28.5 ft
10.0 ft	9.8 fc	31.7 ft

UNI3-WL-I-100-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	82.9 fc	3.1 ft
2.0 ft	20.7 fc	6.3 ft
3.0 ft	9.2 fc	9.4 ft
4.0 ft	5.2 fc	12.5 ft
5.0 ft	3.3 fc	15.6 ft
6.0 ft	2.3 fc	18.8 ft
7.0 ft	1.7 fc	21.9 ft
8.0 ft	1.3 fc	25.0 ft
9.0 ft	1.0 fc	28.2 ft
10.0 ft	0.8 fc	31.3 ft

UNI3-WL-I-200-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	151.0 fc	3.1 ft
2.0 ft	37.8 fc	6.3 ft
3.0 ft	16.8 fc	9.4 ft
4.0 ft	9.4 fc	12.5 ft
5.0 ft	6.0 fc	15.6 ft
6.0 ft	4.2 fc	18.8 ft
7.0 ft	3.1 fc	21.9 ft
8.0 ft	2.4 fc	25.0 ft
9.0 ft	1.9 fc	28.2 ft
10.0 ft	1.5 fc	31.3 ft

UNI3-WL-I-300-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	228.6 fc	3.1 ft
2.0 ft	57.1 fc	6.2 ft
3.0 ft	25.4 fc	9.4 ft
4.0 ft	14.3 fc	12.5 ft
5.0 ft	9.1 fc	15.6 ft
6.0 ft	6.3 fc	18.7 ft
7.0 ft	4.7 fc	21.8 ft
8.0 ft	3.6 fc	24.9 ft
9.0 ft	2.8 fc	28.1 ft
10.0 ft	2.3 fc	31.2 ft

±5% tolerance for all listed data



I Cone of Light

UNI3-WL-I-400-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	310.7 fc	3.1 ft
2.0 ft	77.7 fc	6.2 ft
3.0 ft	34.5 fc	9.4 ft
4.0 ft	19.4 fc	12.5 ft
5.0 ft	12.4 fc	15.6 ft
6.0 ft	8.6 fc	18.7 ft
7.0 ft	6.3 fc	21.9 ft
8.0 ft	4.9 fc	25.0 ft
9.0 ft	3.8 fc	28.1 ft
10.0 ft	3.1 fc	31.2 ft

UNI3-WL-I-500-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	357.4 fc	3.1 ft
2.0 ft	89.3 fc	6.2 ft
3.0 ft	39.7 fc	9.3 ft
4.0 ft	22.3 fc	12.5 ft
5.0 ft	14.3 fc	15.6 ft
6.0 ft	9.9 fc	18.7 ft
7.0 ft	7.3 fc	21.8 ft
8.0 ft	5.6 fc	24.9 ft
9.0 ft	4.4 fc	28.0 ft
10.0 ft	3.6 fc	31.1 ft

UNI3-WL-I-750-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	526.9 fc	3.1 ft
2.0 ft	131.7 fc	6.3 ft
3.0 ft	58.5 fc	9.4 ft
4.0 ft	32.9 fc	12.6 ft
5.0 ft	21.1 fc	15.7 ft
6.0 ft	14.6 fc	18.9 ft
7.0 ft	10.8 fc	22.0 ft
8.0 ft	8.2 fc	25.2 ft
9.0 ft	6.5 fc	28.3 ft
10.0 ft	5.3 fc	31.4 ft

UNI3-WL-I-1000-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	697.6 fc	3.2 ft
2.0 ft	174.4 fc	6.3 ft
3.0 ft	77.5 fc	9.5 ft
4.0 ft	43.6 fc	12.6 ft
5.0 ft	27.9 fc	15.8 ft
6.0 ft	19.4 fc	18.9 ft
7.0 ft	14.2 fc	22.1 ft
8.0 ft	10.9 fc	25.2 ft
9.0 ft	8.6 fc	28.4 ft
10.0 ft	7.0 fc	31.6 ft

UNI3-WL-I-1250-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	900.6 fc	3.2 ft
2.0 ft	225.2 fc	6.3 ft
3.0 ft	100.1 fc	9.5 ft
4.0 ft	56.3 fc	12.7 ft
5.0 ft	36.0 fc	15.8 ft
6.0 ft	25.0 fc	19.0 ft
7.0 ft	18.4 fc	22.2 ft
8.0 ft	14.1 fc	25.4 ft
9.0 ft	11.1 fc	28.5 ft
10.0 ft	9.0 fc	31.7 ft

UNI3-WL-I-1500-30K

Mtg Height	Light Level	Beam Diameter
1.0 ft	1052.4 fc	3.2 ft
2.0 ft	263.1 fc	6.4 ft
3.0 ft	116.9 fc	9.5 ft
4.0 ft	65.8 fc	12.7 ft
5.0 ft	42.1 fc	15.9 ft
6.0 ft	29.2 fc	19.1 ft
7.0 ft	21.5 fc	22.3 ft
8.0 ft	16.4 fc	25.5 ft
9.0 ft	13.0 fc	28.6 ft
10.0 ft	10.5 fc	31.8 ft

±5% tolerance for all listed data