


FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____

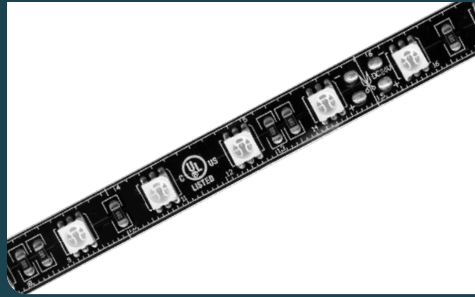

UV Blacklight

400NM BLACKLIGHT | RUBBERCOATED |
LINEAR LED TAPE



I Description

400 nanometer blacklight illuminates phosphor within a multitude of surfaces and liquids. This product can be used in a wide variety of applications including automotive, industrial, hospitality, medical, and entertainment.


I Features

- Dimmable
- 50,000 Hour Life
- UL-Listed for Indoor and Outdoor Use
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies
- 5 Year Warranty
- IP67


I Series Spec

Series/Ordering Code	H400-UV-WR-24V
Input Voltage	24V DC / Constant Voltage
Watts per Foot	2.3 W/ft @ Maximum Run Length
Beam Spread	120°
Max Run Length	Unlimited, Power Every 30ft
Production Intervals	3.94" (100mm)
End Cap Dimensions	0.56" (15mm) × 0.38" (9mm)
Tape Dimensions	0.5" (13mm) × 0.25" (6mm)
Diode	5050
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-Lume
Operating Temp.	-40°F (-40°C) to 149°F (65°C)

I Nanometer Light Spectrum

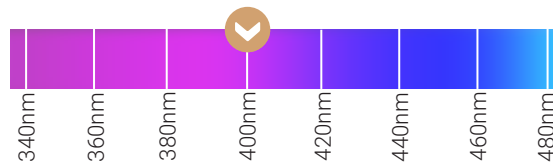

I Dimensions

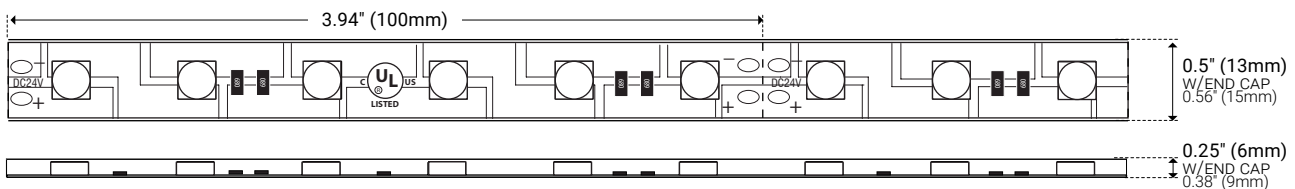

* Customizable—Consult Factory

Certified to CAN/CSA Standard C22.2 NO. 250.0



I Power Chart

	Total Wattage Used at Each Length
1 ft	5.1
2 ft	8.9
3 ft	13
4 ft	16.8
5 ft	20.6
6 ft	23.9
7 ft	27.1
8 ft	30.6
9 ft	33.8
10 ft	37.5
11 ft	40.1
12 ft	42.6
13 ft	45.2
14 ft	47.5
15 ft	50.1
16 ft	51.6
17 ft	53.2
18 ft	54.9
19 ft	56.1
20 ft	57.8
21 ft	59.5
22 ft	61.7
23 ft	62.6
24 ft	64.9
25 ft	65.9
26 ft	67.3
27 ft	67.6
28 ft	68.2
29 ft	68.7
30 ft	68.8