



Uniform Field Connectors/Couplers

Spec Sheet


Only for Uniform Static White Indoor

Wire Lead

This is an instant 6 foot snap-on power feed cable.



Unit Number	UNI-WL-I-WL12-6
Feed Length	72.0" (1.82m)
Length	0.53" (13.6mm)
Width	0.54" (13.7mm)
Height	0.16" (4.2mm)

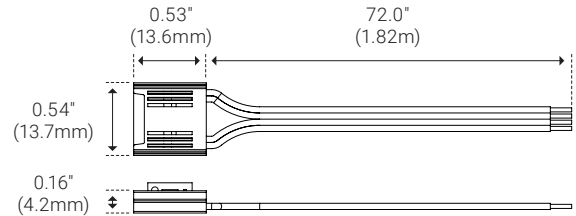


Corner Connector

This snap-on connector will connect two pieces of LED together but also provide separation so you can curve around corners or bridge gaps.



Unit Number	UNI-WL-I-CC12-3I
Feed Length	2.83" (71.9mm)
Length	0.53" (13.6mm)
Width	0.54" (13.7mm)
Height	0.16" (4.2mm)

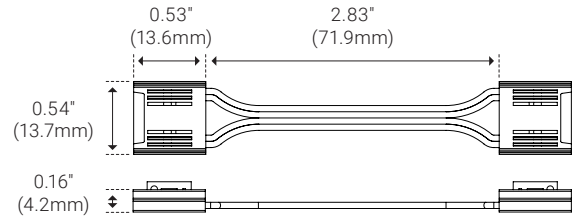


Straight Coupler

This snap-on coupler quickly connects two runs of tape together.



Unit Number	UNI-WL-I-SC12
Length	0.53" (13.6mm)
Width	0.54" (13.7mm)
Height	0.16" (4.2mm)

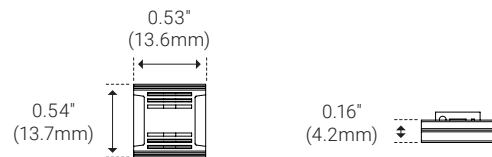



Uniform Field Connectors/Couplers

Installation Instructions

⚠ SAFETY PRECAUTIONS

Uniform Field Connectors are not water resistant. Do not use for outdoor rated tape.


Do not use Uniform Field Connectors in a wet or damp environment.

Field Connector blades are sharp, use caution when snapping together.


Ensure tape is disconnected from power before installing the Uniform Tape Connectors.

Product should be installed by a qualified electrician.


- 1 | Peel back 0.30"–0.50" (7.6mm–12.7mm) of the protective liner to expose adhesive.

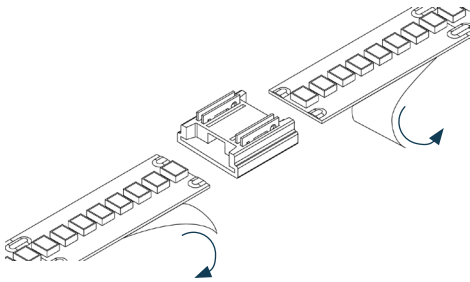

- 2 | Insert Uniform LED tape into connector. (Confirm polarity of LED strips match each other)

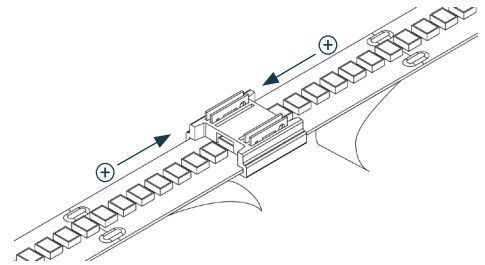

- 3 | Press down on each of the pairs of connector terminals until the metal blades are flush with the top of the connector, puncturing the LED tape.

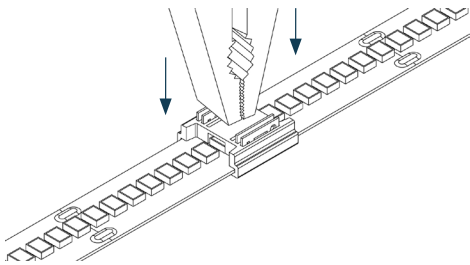

- 4 | Connector assembly complete.

