



# DIRECT VIEW 200 (OUTDOOR)

DL-SERIES | RUBBER COATED | LINEAR LED LIGHTING


Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



Cut Intervals: 1" (25mm)



Width: 0.5"  
(13.2mm)  
(0.563" [14.2mm] end cap)



Depth: 0.25"  
(6mm)  
(0.375" [9mm] end cap)

MODEL:	DL27K-WR-24V	DL30K-WR-24V	DL35K-WR-24V	DL40K-WR-24V	DL50K-WR-24V
Kelvin	2700K	3000K	3500K	4100K	5000K
Lumens	189 lm/ft	195 lm/ft	205 lm/ft	220 lm/ft	237 lm/ft
Rating	IP67	IP67	IP67	IP67	IP67


## PRODUCT FEATURES

- Suitable for most direct view applications
- 90+ CRI
- Dimmable
- 50,000 hour life
- 5-year warranty
- UL-listed for indoor and outdoor use
- 3M™ Industrial adhesive backing
- For use with 24V power supplies

## SPECIFICATIONS

Series	DL - Direct View 200 (Outdoor)
Input Voltage	24VDC / Constant Voltage
Watts per Foot	2.6W/ft @ Maximum Run Length
Beam Spread	120°
Max Run Length	Unlimited, power every 20ft
Cut Intervals	1" (25mm)
End Cap Dimensions	0.563" (14.2mm) × 0.375" (9mm)
Tape Dimensions	0.5" (13.2mm) × 0.25" (6mm)
CRI	90+
Diode	2016
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)

## KELVIN COLOR TEMPERATURE SCALE

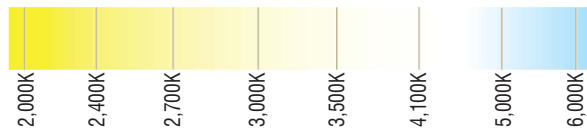

## TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft	16ft	17ft	18ft	19ft	20ft
3	6.6	10.2	13.6	17	20.3	23.5	26.6	29.5	32.4	35.1	37.7	40.2	42.6	44.8	46.9	48.6	49.2	51	52.8

Conforms to ANSI/UL Standard 2108  
Certified to CAN/CSA Standard C22.2 No. 250.0

