





SIDE EMITTING (OUTDOOR)

SE-SERIES | LINEAR LED LIGHTING

Fixture Type: _____

Project: _____

Location: _____

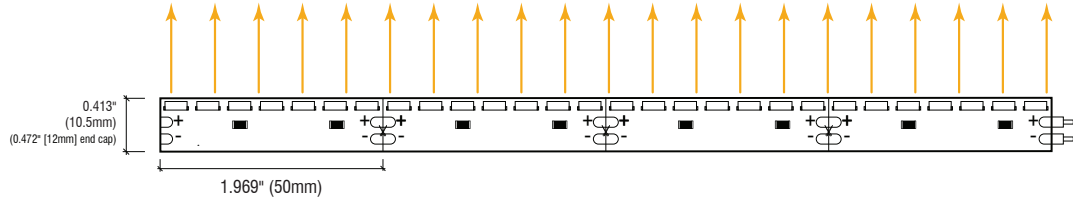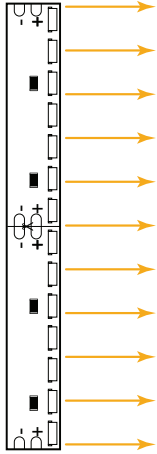

MODEL:	SE-27K-300-WR-24V	SE-30K-300-WR-24V	SE-35K-300-WR-24V	SE-40K-300-WR-24V	SE-50K-300-WR-24V
Kelvin	2700K	3000K	3500K	4000K	5000K
Lumens/ft	306 lm/ft	323 lm/ft	323 lm/ft	340 lm/ft	340 lm/ft



PRODUCT FEATURES

- Side Emitting Diode
- 3/4" Bend Diameter
- Dimmable
- 5-year Warranty
- 50,000 Hour Life
- UL-listed for Outdoor
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

SPECIFICATIONS

Series	SE—Side Emitting (Outdoor)
Input Voltage	24V DC / Constant Voltage
Watts per Foot	2.2W/ft @ Max Run Length
Beam Spread	120°
Max Run Length	Unlimited, power every 20ft
Production Length	1.969" (50mm)
Dimensions	0.413" (10.5mm) × 0.165" (4.2mm)
End Cap Dimensions	0.472" (12mm) × 0.197" (5mm)
CRI	90+
Diode	4020
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-4°F (-20°C) to 113°F (45°C)
Rating	IP66



1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft	16ft	17ft	18ft	19ft	20ft
3.6	6.6	9.6	12.5	15.3	18	20.6	23.1	25.6	27.9	30	32.1	34.1	35.9	37.7	39.3	40.8	42.2	43.6	44.4

Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.0

