



SIGNWAVE™ 3 HO (INDOOR/OUTDOOR)

SW3-SERIES HIGH OUTPUT | FLEXIBLE LIGHTING SYSTEM

Fixture Type: _____

Project: _____

Location: _____

PRODUCT FEATURES


- Dimmable
- 50,000 hour life
- Flat profile for streamline projects
- IP67 or IP68 option
- UL-listed for indoor and outdoor use
- Factory-installed power feed
- Injection-molded flush end caps
- For use with 24V power supplies



SPECIFICATIONS

Series	SW3HO - Signwave™ 3 High Output
Input Voltage	24V DC
Lumens	244 Lm/ft (3000K)
Wattage	4.6W/ft
Max Run Length	Unlimited, power every 20ft
Beam Angle	160°
Dimensions	0.630"(16mm) × 0.670"(17mm)
Production Intervals	2.189" (55.6mm)
Control Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-4°F (-20°C) to 113°F (45°C)

BENDING & PROFILE DIMENSIONS

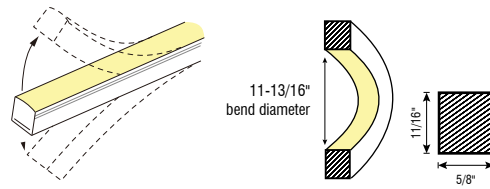

DryWire ferrule located 115mm from the cable connector. Protects against damage from water ingress inside cable wire.

Included in every run.

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.0







SIGNWAVE™ 3 (INDOOR/OUTDOOR)

SW3-SERIES | FLEXIBLE LIGHTING SYSTEM

IP67 OPTIONS

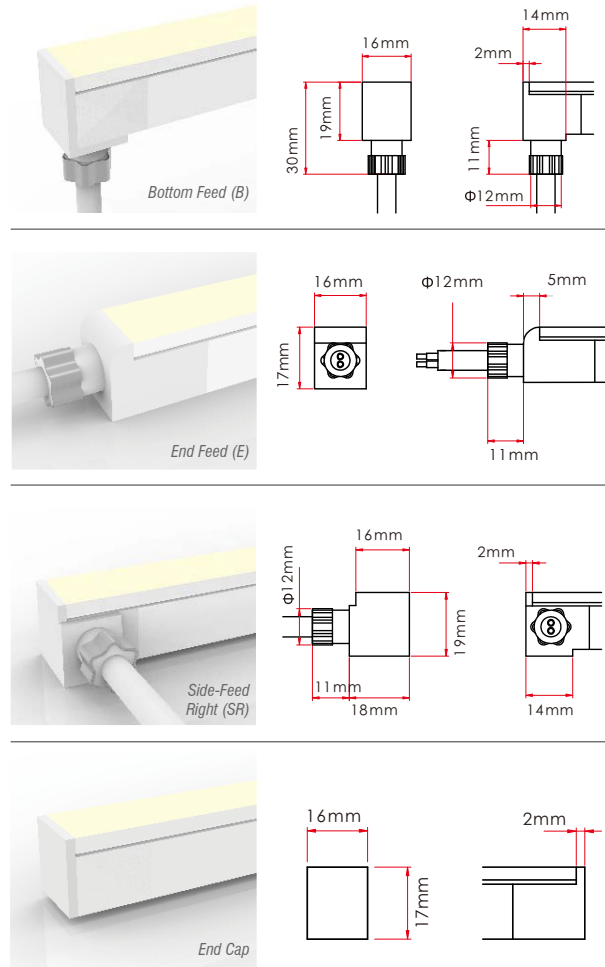

IP68 OPTIONS

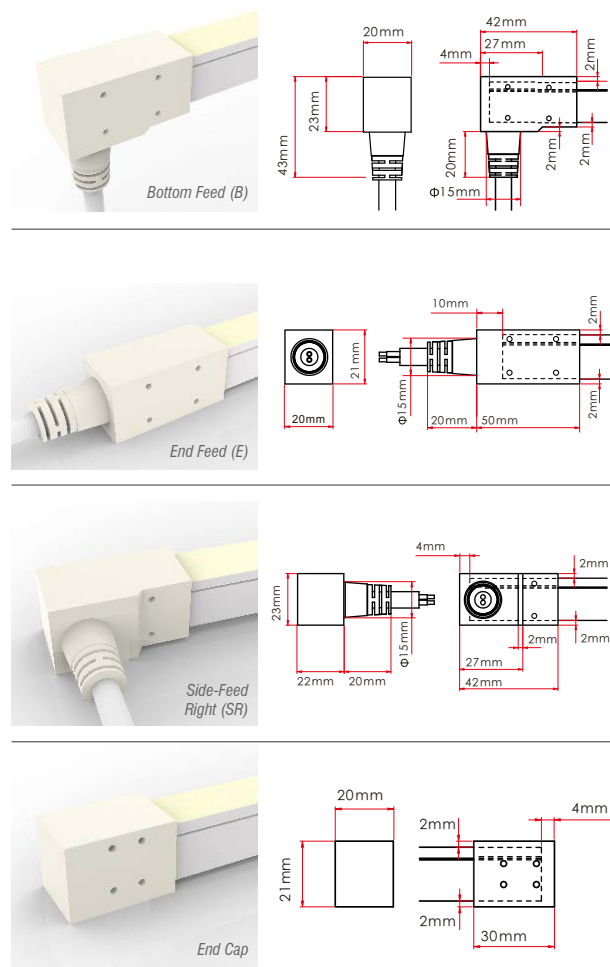

ORDERING INFORMATION

Example: **SW3HO-36-35K-VR-E-S-IP67**



Series	Length (Unlimited)	Color	Bending	Feed Point	Feed Length	Rating
SW3HO			VR			
SW3HO	Inches	22K - 2200K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 57K - 5700K	VR - Vertical	B - Bottom Feed SL - Side-Feed Left SR - Side-Feed Right E - End Feed	S - Standard (72 inch) Inches - Custom length (inches).	IP67 IP68



SIGNWAVE® NARROW VIEW ACCESSORIES



FOR SIGNWAVE™ 3 SERIES

ALUMINUM SERRATED CHANNEL

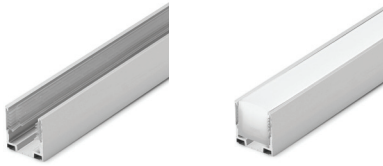


Model	SW-K-AL-CH-SR-2M
Material	Aluminum
Length	78.75" (2m)
Width	0.80" (20.2mm)
Height	0.82" (20.8mm)
Internal Width	0.64" (16.3mm)

ALUMINUM SERRATED CLIP

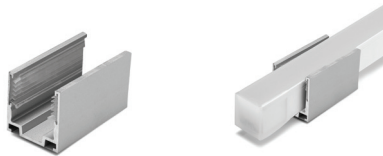


Model	SW-K-CLP-AL-SR
Material	Aluminum
Length	0.79" (20mm)
Width	0.80" (20.2mm)
Height	0.82" (20.8mm)
Internal Width	0.64" (16.3mm)

ALUMINUM SERRATED FLEX CHANNEL



Model	SW-K-CH-AL-FLX-1M
Material	Aluminum
Length	39.3" (1m)
Width	0.80" (20.2mm)
Height	0.82" (20.8mm)
Internal Width	0.64" (16.3mm)

SIDE MOUNTING BRACKET



Model	SW-CLP-RA
Material	Aluminum
Length	0.79" (20mm)
Width	0.98" (25mm)
Height	2.75" (70mm)