
Complete Specification Sheet

Digital Pixel (Outdoor)

LINEAR LED

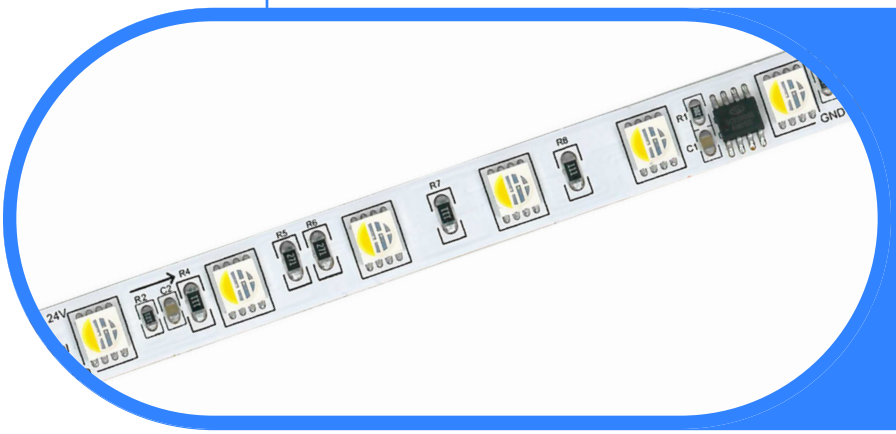

Digital Pixel (Outdoor)

Color Changing Pixel Control

RoHS COMPLIANT | c UL us LISTED | 24V DC | Dry Rated | Field Cuttable

Specifications

Category	Linear LED
Series	TX Series
Family	Digital Pixel
Watts Per Foot	5.79W/ft
Environment	IP67
Diode	5050
CRI	90+ (White 3000K)
Input Voltage	24V DC
Width	0.48in (12mm)
Height	0.16in (4mm)
Max Run Length	16.4ft (5M)
Cut Intervals	3.93in (100mm)
Beam Angle	120
Lumens per ft	223lm/ft
Operating Temp.	-4°F (-20°C) to 113°F (45°C)
Dimming Options	SPI via UCS2904

Features

- 90+ CRI
- Dimmable
- Independently Controllable Every 6 Diodes
- 50,000 Hour Life Expectancy
- UL-Listed for Indoor and Outdoor Use
- 3M™ Industrial Adhesive Backing
- For Use with Electronic Power Supplies
- 5-Year Warranty


Power Chart

Feet	Watts
1	5.5
2	11.2
3	16.8
4	22.4
5	28
6	33.5
7	38.9
8	44.3
9	49.7
10	55
11	60.3
12	65.6
13	70.8
14	76
15	81.1
16	86.2

Order Code

TX3RGBW-WR-24V

Dimensions

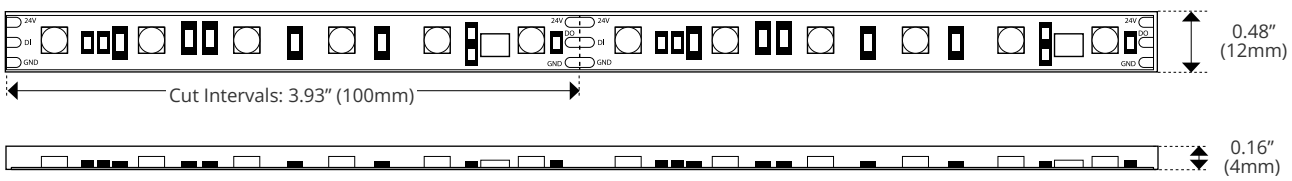

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____