



Complete Specification Sheet

Eclix Static White

ECLIX



Eclix Static White

Line Volt Articulating Cove Fixture



Specifications

Category	Fixture
Series	Eclix
Family	Static White
Watts per Foot	6 W/ft
IP Rating	IP20
CRI	90+
CCT Options	2700K, 3000K, 3500K, 4000K
Input Voltage	120-277V AC
Max Run Length	80ft (24.4m)
Beam Angle	103°
Lumens per Foot	713 - 731 lm/ft
Storage Temp.	30°F (-1°C) to 140°F (60°C)
Operating Temp.	30°F (-1°C) to 113°F (45°C)
Dimming Options	0 - 10V
Warranty	3 Years




Features

- 120-277V AC
- 60° articulation in either direction, 10° increments with Pivot Clip
- Flicker-Free 0-10V Dimming down to 5%
- Daisy Chain Multiple Fixtures up to 80ft

Description

Eclix is specifically designed for indoor cove lighting, accent lighting, and integrated architectural lighting

Dimensions

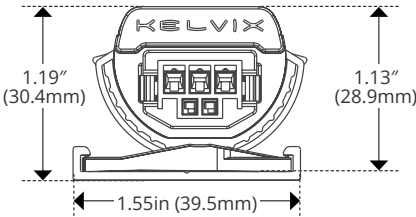

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
Conforms to ANSI/UL Standard 1598
Certified to CAN/CSA Standard C22.2 No. 250.0

Fixture Type _____

Project Name _____

Location _____




Product Code Builder

Eclix Static White

ECLIX

Product Code Builder


Example: ECX-1-6-Z-27K-UNV-FR

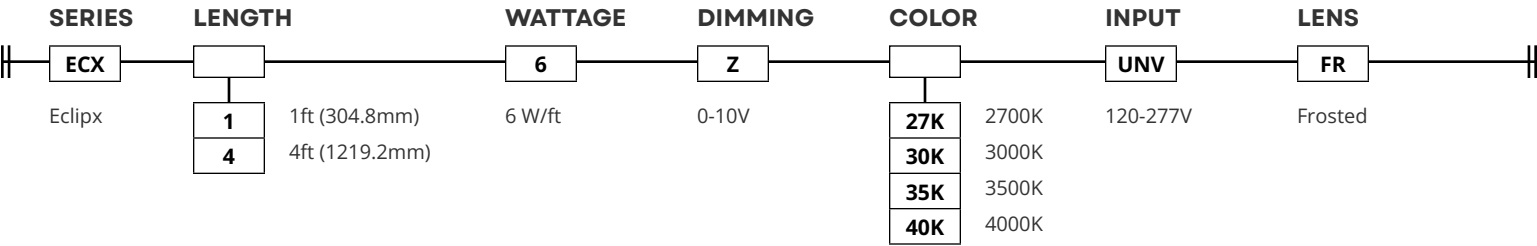

CCT

CCT	Lumens per Foot (1ft)
2700K	665
3000K	690
3500K	713
4000K	731

ARTICULATION



Kelvin reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvin installation instruction.
Conforms to ANSI/UL Standard 1598
Certified to CAN/CSA Standard C22.2 No. 250.0

Fixture Type _____

Project Name _____

Location _____



Mounting Details

Eclipx

Mounting

TYPE

Mounting Clips




DESCRIPTION

ECX-CM-MC	
Width	1.48in (37.67mm)
Height	0.83in (21.3mm)

1ft Fixture comes with 2x ECX-CM-MC, 4ft Fixture comes with 4x.


DIMENSIONS

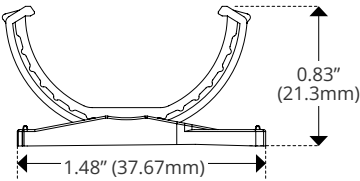

Terminating End Cap




ECX-CM-EC	
Width	0.75in (19.10mm)
Length	0.62in (15.9mm)
Height	13.7in (0.53mm)

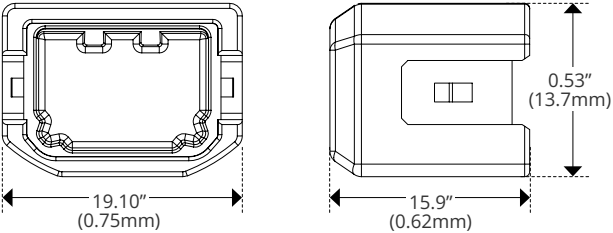


Mounting Track



ECX-CM-TR-4	
Width	1.57in (40.0mm)
Length	4.0ft (1.21m)
Height	0.23in (5.90mm)



Diagram

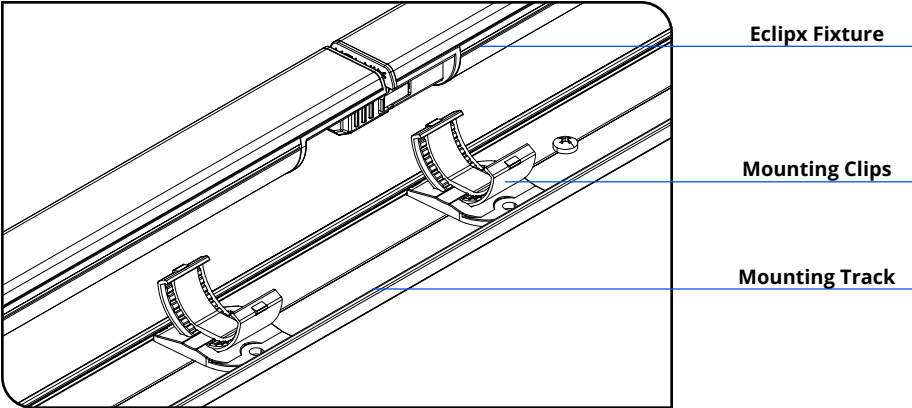

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
Conforms to ANSI/UL Standard 1598
Certified to CAN/CSA Standard C22.2 No. 250.0

Fixture Type _____

Project Name _____

Location _____



Power and Connector Details

Eclipx

Connectors

TYPE


Power Lead



DESCRIPTION

Order Code	Length
ECX-FML-10	10ft (3.04m)


WIRING GUIDE

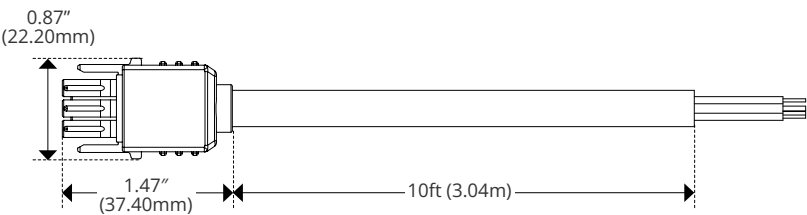

Connector



Order Code	Length (L)
ECX-FMC-6I	3in (0.076m)
ECX-FMC-1	9in (0.23m)
ECX-FMC-5	57in (1.45m)

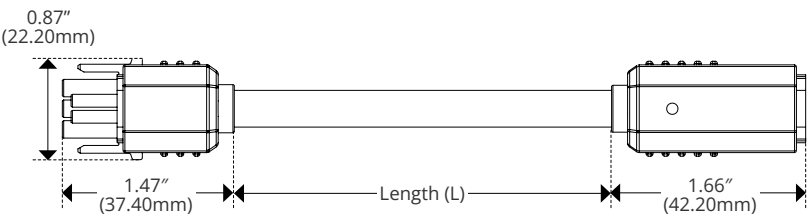



Wiring Details


Eclipx

ECLIPX

Wire Gauge

Cable Type	Wire		Gauge
Power Lead and Connector	120V	Hot (Black)	18AWG
		Neutral (White)	18AWG
	0-10	DIM + (Purple)	22AWG
		DIM - (Pink)	22AWG

0-10V

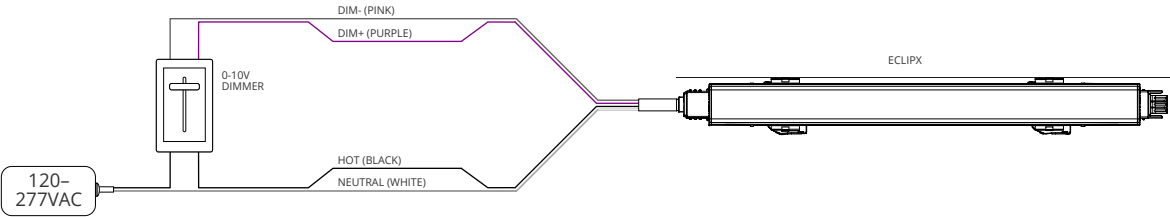

Kelvin reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvin installation instruction.
Conforms to ANSI/UL Standard 1598
Certified to CAN/CSA Standard C22.2 No. 250.0

Fixture Type _____

Project Name _____

Location _____