Complete Specification Sheet

Floptix™ Asymmetric Static White

LINEAR LED



Floptix™ Asymmetric Static White

Flexible Optics

RoHS COMPLIANT | c UL us LISTED | 24V DC | Dry Rated | Field Cuttable

Specifications

Category	Linear LED
Series	Floptix Asymmetric
Family	Static White
Watts Per Foot	4.88W/ft
Environment	IP67
CRI	90+
CCT Options	2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Input Voltage	24V DC
Width	0.87in (23mm)
Height	0.43in (11mm)
Max Run Length	16ft (4.87M)
Cut Intervals	6.57in (167.0mm)
Bend Diameter	7.0in (180mm)
Bend Direction	Vertical
Beam Angle	110° x 70°
Operating Temp.	-40°F (-40°C) to 113°F (45°C)
Dimming Options	PWM, Triac, 0–10V, DMX, Hi-lume


Features

- Factory Built to Length
- Multiple Beam Options
- Flexible

Descrtiption

Floptix combines flexible led and architectural optics into a versatile system with a multitude of indoor and outdoor applications.

Dimensions

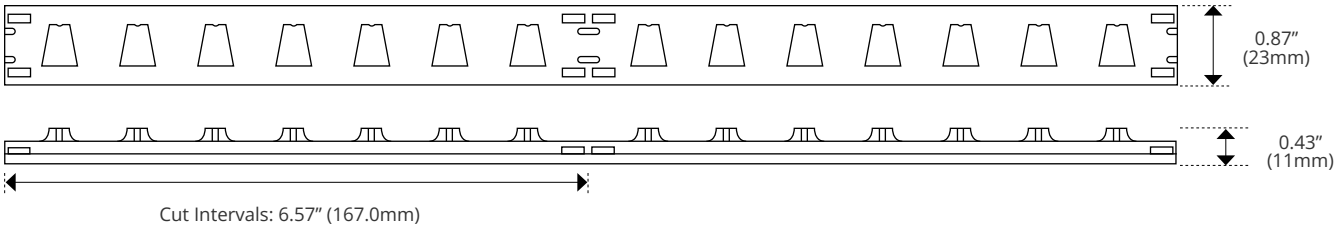

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____

Product Code Builder

Floptix™ Asymmetric Static White

LINEAR LED


Product Code Builder

Example: FXA-24K-450-11070-SL-XX


SERIES	CCT		OUTPUT	BEAM ANGLE	END FEED, LENGTH			LENGTH	
FXA			450	11070					
Floptix™ Asymmetric	24K	2400K	450 lm/ft	110° x 70°	Side Left	SL	2	2ft (24.0in) [1]	XX	Customer specific length
	27K	2700K			Side Right	SR	6	6ft (72.0in) [1]		
	30K	3000K			End Feed	E	12	12ft (144.0in) [1]		
	35K	3500K					20	20ft (240.0in) [1]		
	40K	4000K								
	50K	5000K								

[1]Contact Kelvix for Custom Lengths


END FEED

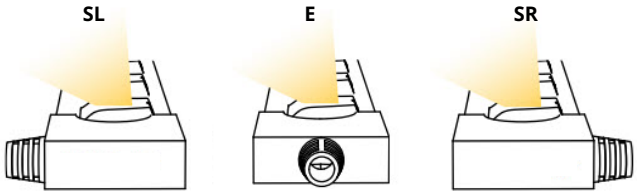

BEND DIRECTION

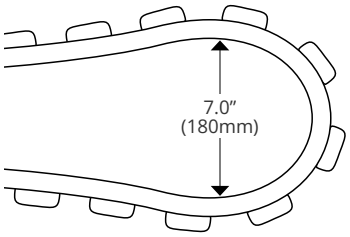

POLAR PLOT - 30K



Mounting Options

IMAGE

Stainless Steel Mounting Clip




SPECIFICATIONS

FX-CM-CLP	
Length	1.14in (28.9mm)
Width	1.05in (26.72mm)
Height	0.53in (13.5mm)
Internal Width	0.99in (25.33mm)

Pack of 10 Units


DIMENSIONS

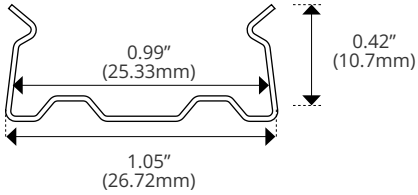

Aluminum Channel



FX-CM-CH-2M	
Length	78.74in (2m)
Width	1.18in (30mm)
Height	0.42in (10.7mm)
Internal Width	1.08in (27.5mm)

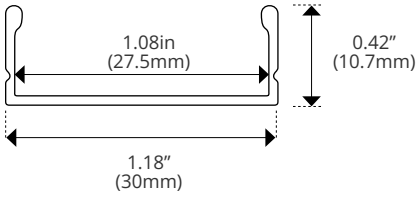

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____