




# FLOPTIX™ SYMMETRIC

## FLEXIBLE OPTICS

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_


Location: \_\_\_\_\_

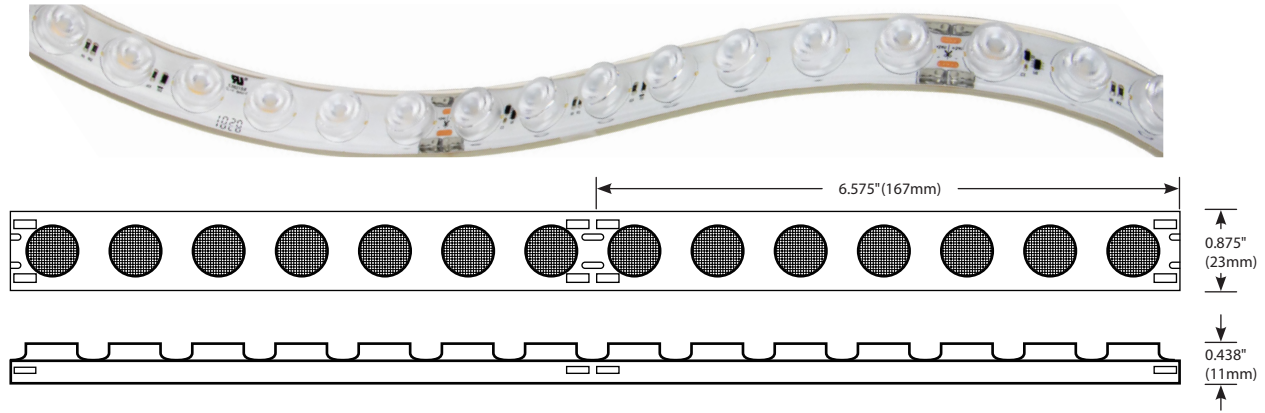

| MODEL  | FX-24K-650 | FX-27K-650 | FX-30K-650 | FX-35K-650 | FX-40K-650 | FX-50K-650 |
|--------|------------|------------|------------|------------|------------|------------|
| KELVIN | 2400K      | 2700K      | 3000K      | 3500K      | 4000K      | 5000K      |
| LUMENS | 572 lm/ft  | 597 lm/ft  | 632 lm/ft  | 666 lm/ft  | 691 lm/ft  | 705 lm/ft  |

## PRODUCT FEATURES

- Factory Built to Length
- Multiple Beam Options
- Flexible
- IP67



## SPECIFICATIONS

|                 |                                   |
|-----------------|-----------------------------------|
| Series          | FX—Floptix                        |
| Input Voltage   | 24VDC                             |
| Watts per Foot  | 5.85W/ft                          |
| Beam Angle      | 20°, 30°, 40°, 50°, and 20° × 30° |
| Max Run Length  | 16 ft per Power Feed              |
| Cut Intervals   | 6.575" (167mm)                    |
| Bend Diameter   | 7" (180mm)                        |
| Tape Dimensions | 0.875" (23mm) × 0.438" (11mm)     |
| CRI             | 90+                               |
| Dimming Options | PWM, Triac, 0–10V, DMX, Hi-lume   |
| Temp Range      | -40°F (-40°C) to 113°F (45°C)     |

## ORDERING INFORMATION

Example: FX-24K-650-20-E-5FT-5.75IN

| Item       | CCT                                                                        | Output        | Beam Angle                                             | Feed Point                                            | Feet                                                                                                                                       | Inches     |
|------------|----------------------------------------------------------------------------|---------------|--------------------------------------------------------|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|------------|
| <b>FX</b>  |                                                                            | <b>650</b>    |                                                        |                                                       | <b>_FT</b>                                                                                                                                 | <b>_IN</b> |
| FX—Floptix | 24K—2400K<br>27K—2700K<br>30K—3000K<br>35K—3500K<br>40K—4000K<br>50K—5000K | 650—650 lm/ft | 20—20°<br>30—30°<br>40—40°<br>50—50°<br>2030—20° × 30° | SL—Side Feed Left<br>SR—Side Feed Right<br>E—End Feed | <b>Length</b> — Enter number of feet, followed by any remaining inches. (i.e. 5FT-5.75IN)<br><i>Max run length is 16ft per Power Feed.</i> |            |

Conforms to ANSI/UL Standard 2108  
Certified to CAN/CSA Standard C22.2 No. 250.0








# FLOPTIX™

FLEXIBLE OPTICS

## FEED POINT GUIDE




## MOUNTING CLIPS (10 PER PACK)



## SPECIFICATIONS

|                |                  |
|----------------|------------------|
| Model          | FX-CM-CLP        |
| Material       | Stainless Steel  |
| Length         | 0.59" (15mm)     |
| Width          | 1.052" (26.72mm) |
| Height         | 0.452" (11.47mm) |
| Internal Width | 0.997" (25.33mm) |

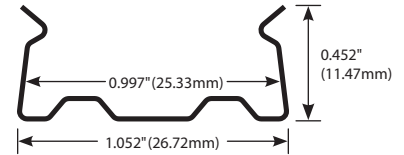

## ALUMINUM CHANNEL



## SPECIFICATIONS

|                |                 |
|----------------|-----------------|
| Model          | FX-CM-CH-2M     |
| Material       | Aluminum        |
| Length         | 78.74" (2m)     |
| Width          | 1.181" (30mm)   |
| Height         | 0.421" (10.7mm) |
| Internal Width | 1.083" (27.5mm) |

