Complete Specification Sheet

Floptix™ Symmetric Static White

LINEAR LED



Floptix™ Symmetric Static White

Flexible Optics

RoHS COMPLIANT | c UL us LISTED | 24V DC | Dry Rated | Field Cuttable

Specifications

Category	Linear LED
Series	Floptix Symmetric
Family	Static White
Watts Per Foot	4.88W/ft
Environment	IP67
CRI	90+
CCT Options	2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Input Voltage	24V DC
Width	0.87in (23mm)
Height	0.43in (11mm)
Max Run Length	16ft (4.87M)
Cut Intervals	6.57in (167.0mm)
Bend Diameter	7.0in (180mm)
Bend Direction	Vertical
Beam Angle	20°, 30°, 40°, 50°, 20° x 30°
Operating Temp.	-40°F (-40°C) to 113°F (45°C)
Dimming Options	PWM, Triac, 0–10V, DMX, Hi-lume


Features

- Factory Built to Length
- Multiple Beam Options
- Flexible

Descrtiption

Floptix combines flexible led and architectural optics into a versatile system with a multitude of indoor and outdoor applications.

Dimensions

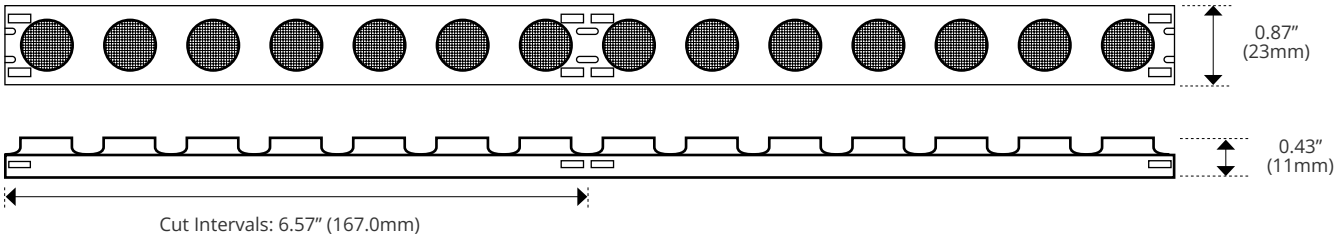

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____

Product Code Builder

Floptix™ Symmetric Static White

LINEAR LED


Product Code Builder

Example: FX-24K-650-20-SL-XX


SERIES	CCT	OUTPUT	BEAM ANGLE	END FEED, LENGTH		LENGTH
FX		650				
Floptix™	24K 2400K 27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	650 lm/ft	20 20° 30 30° 40 40° 50 50° 2030 20° x 30°	Side Left SL Side Right SR End Feed E	2 2ft (24.0in) [1] 6 6ft (72.0in) [1] 12 12ft (144.0in) [1] 20 20ft (240.0in) [1]	XX Customer specific length

[1]Contact Kelvix for Custom Lengths


END FEED

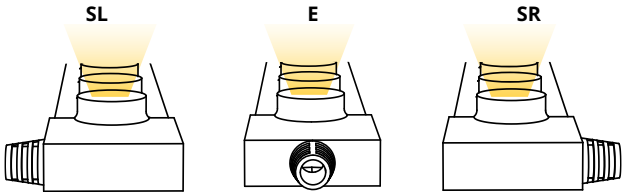

BEND DIRECTION

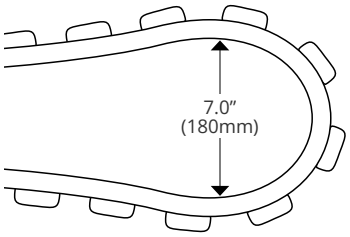

POLAR PLOT - 30K



Mounting Options

IMAGE

Stainless Steel Mounting Clip




SPECIFICATIONS

FX-CM-CLP

Length	1.14in (28.9mm)
Width	1.05in (26.72mm)
Height	0.53in (13.5mm)
Internal Width	0.99in (25.33mm)

Pack of 10 Units

DIMENSIONS

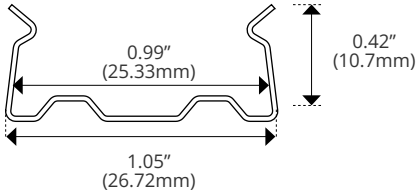


Aluminum Channel



FX-CM-CH-2M

Length	78.74in (2m)
Width	1.18in (30mm)
Height	0.42in (10.7mm)
Internal Width	1.08in (27.5mm)

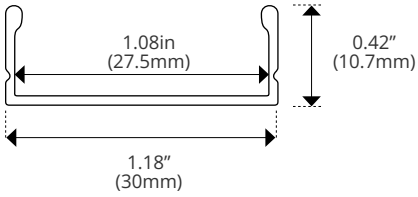

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____