




Complete Specification Sheet

Side Emitting Static White

LINEAR
LED

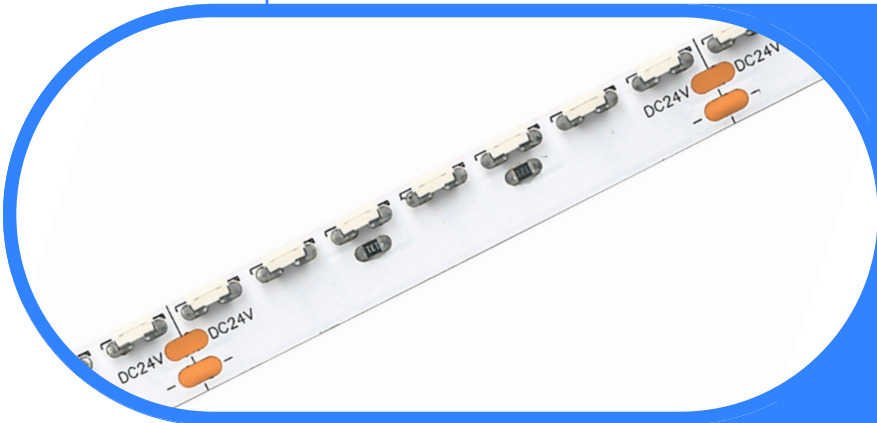

Side Emitting Static White

Side Illuminating Linear LED



Specifications

Category	Linear LED
Series	Side Emitting
Family	Static White
Watts per Foot (AVG)	2.48W/ft
Environment	Indoor
Diode	4020
CRI	90+
CCT Options	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
Input Voltage	24V DC
Width	0.31in (8.0mm)
Height	0.09in (2.4mm)
Max Run Length	20ft (6.09m)
Cut Intervals	1.97in (50.0mm)
Life Expectancy	50,000 Hour Life Expectancy
Operating Temp.	-4°F (-20°C) to 113°F (45°C)
Dimming Options	Triac, ELV, 0-10V, DMX


Features

- Side Emitting Diode
- 3/4" Bend Diameter
- Dimmable
- 5-year Warranty
- 50,000 Hour Life Expectancy
- UL-listed for Indoor
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

Description

Side Emitting strips offer zero-glare for applications such as display cabinets, retail product displays, and jewelry cases. Aim the light source towards the product, and away from the viewer. When installed properly, you can't tell where the light is coming from!

Dimensions

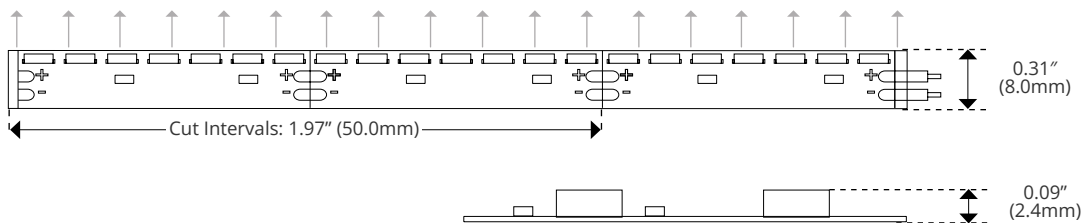

Kelvin reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvin installation instruction.
Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____




Product Code Builder

Side Emitting Static White

LINEAR
LED

Product Code Builder

Example: SE-27K-300-24V

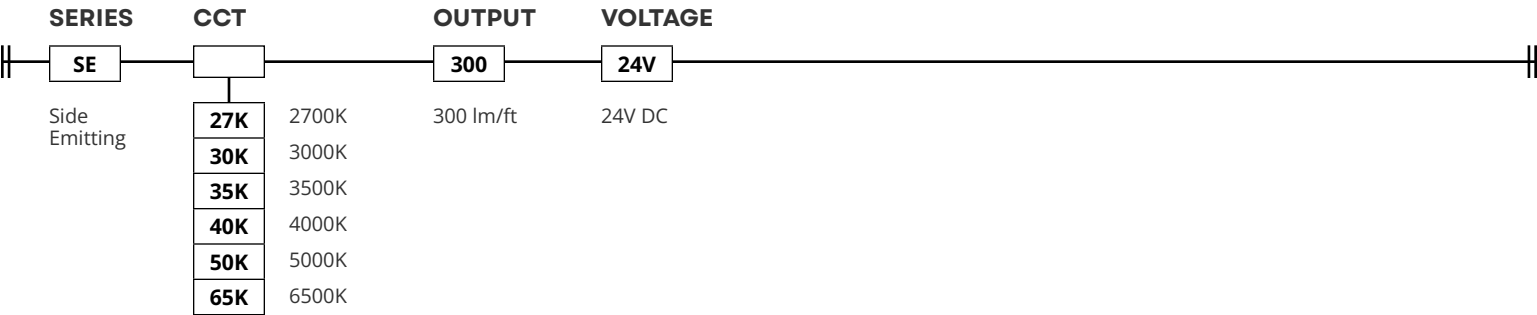


PRODUCT DATA

Feet	Watts
1	2.9
2	5.7
3	8.3
4	11.0
5	13.5
6	15.9
7	18.3
8	20.5
9	22.7
10	24.8
11	26.8
12	28.7
13	30.5
14	32.3
15	33.9
16	35.5
17	37.0
18	38.4
19	39.7
20	40.9

CCT	Lumens
27K	306
30K	323
35K	323
40K	340
50K	340
65K	340

BEND DIAMETER

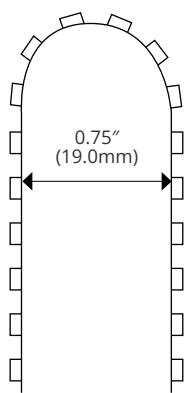

Kelvin reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvin installation instruction.
Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____