
Complete Specification Sheet

Slinx™ Static White

LINEAR LED

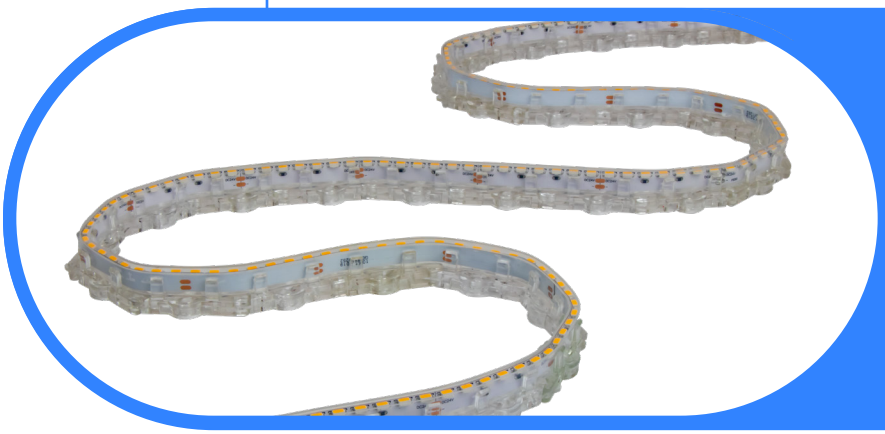

Slinx™ Static White

Horizontal Bend Linear LED

RoHS COMPLIANT | UL LISTED | 24V DC | Damp Rated

Specifications

Category	Linear LED
Series	Slinx
Family	Static White
Watts per Foot (AVG)	2.48W/ft
Environment	IP65
Diode	4020
CRI	90+
CCT Options	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
Input Voltage	24V DC
Width	0.41in (10.5mm)
Height	0.16" (4.2mm)
Max Run Length	20ft (6.09m)
Cut Intervals	1.97in (50.0mm)
Life Expectancy	50,000 Hour Life Expectancy
Operating Temp.	-4°F (-20°C) to 113°F (45°C)
Dimming Options	Triac, ELV, 0-10V, DMX


Features

- Side Emitting Diode
- 3/4" Bend Diameter
- Dimmable
- 50,000 Hour Life Expectancy
- UL-listed for Indoor and Damp Environments
- For Use with 24V Power Supplies

Description

Slinx is an extremely unique IP65 lighting system offering horizontal bending. Perfect for uplighting or downlighting, Slinx can illuminate curved benches, railings, and other architectural details.

Dimensions

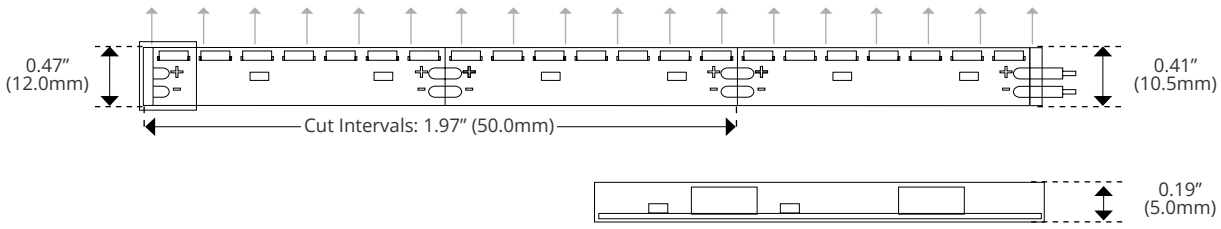

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____

Product Code Builder

Slinx™ Static White

LINEAR LED

Product Code Builder

Example: SX-27K-300-24V


SERIES	CCT		OUTPUT	VOLTAGE
SX			300	24V
Slinx	27K	2700K	300 lm/ft	24V DC
	30K	3000K		
	35K	3500K		
	40K	4000K		
	50K	5000K		
	65K	6500K		

PRODUCT DATA

Feet	Watts
1	2.9
2	5.7
3	8.3
4	11.0
5	13.5
6	15.9
7	18.3
8	20.5
9	22.7
10	24.8
11	26.8
12	28.7
13	30.5
14	32.3
15	33.9
16	35.5
17	37.0
18	38.4
19	39.7
20	40.9

CCT	Lumens
27K	306
30K	315
35K	323
40K	340
50K	340
65K	340

BEND DIAMETER

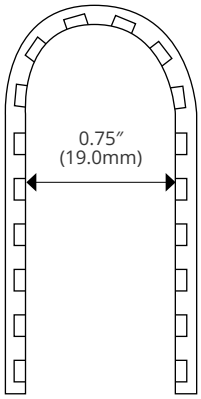

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____

Mounting Options

Slinx™ Static White

Mounting Options

IMAGE

Plastic Mounting Clip




SPECIFICATIONS


SX-CLP-10S-PAK-P

Length	1.00in (25.5mm)
Width	0.56in (14.9mm)
Height	0.56in (14.9mm)
Internal Width	0.12in (3.2mm)


Pack of 10 Units

DIMENSIONS






SnapTrax

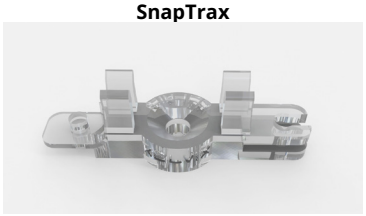



SX-TRX-1F-PAK-P

Pivot Length	1.50in (38mm)
Connected Length	2.18in (309.5mm)
Width	0.56in (14.9mm)
Height	0.56in (14.9mm)
Internal Width	0.12in (3.2mm)

Pack of 8 Units, 1 Pack Per Foot

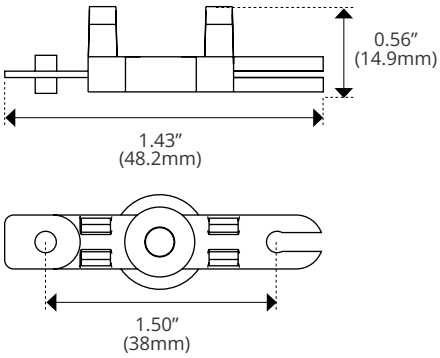





Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____