

PRODUCT FEATURES

- 120/277V
- 0–10V Dimming
- Adjustable Kelvin (4000K, 3500K, and 3000K)
- Integrated High/Low/Off Switch
- Aluminum Housing
- Protections: Short Circuit / Over Current / Over Voltage / No load
- Soft Start Power Supply Feature
- 50,000 Hour Life
- Fixtures Connect in Series (Coupler Included)


SPECIFICATIONS

Input Voltage	120-277V / 50-60HZ
Beam Angle	120°
CRI	90+
Dimensions	4.063" × 1" × Variable
Dimming Options	0-10V, High/Low Switch
Max Run Length	500W per Power Feed
Power Factor	95% @ 120V, 85% @ 277V
Use Temp Range	-4°F (-20°C) to 122°F (50°C)
Diode	2835

High/Low/Off Switch

ORDERING INFORMATION

Example: UC9-3040-010V-120277-WH

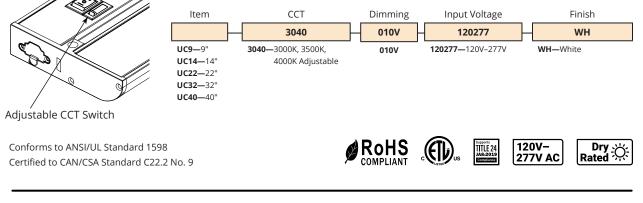




UNICAB[™] POWER & CONNECT

Fixture Type:_____ Project: _____

UNIVERSAL UNDERCABINET LED FIXTURE 120–277 VOLT | 0–10V DIMMING ADJUSTABLE CCT

Lo	ca	ti	0	n	
		•••	-	•••	

OPTIONAL COMPONENTS

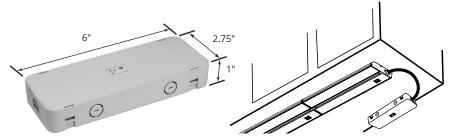

Hardwire Box

Although UniCab fixtures can hardwire directly without a hardwire box, this item can be used to separate the power feed location from the fixture. When using the hardwire box, please note that a jumper set is required (specify length—sold separately).


UC-HW



Jumper Sets

Connects UniCab fixtures to hardwire box or allows for fixture separation when multiple fixtures are connected in a series. Jumper sets include cabling for 0–10V dimming.

- 6" | UC-JP-6-SET
- 24" | UC-JP-24-SET
- 60" | UC-JP-60-SET

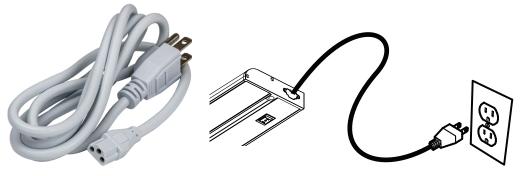

Plug-In Power Feed

Use when power will be provided by a standard grounded plug (120V only). UC-PLG-60