




# Complete Specification Sheet

## Zolo 3 Static White

ZOLO

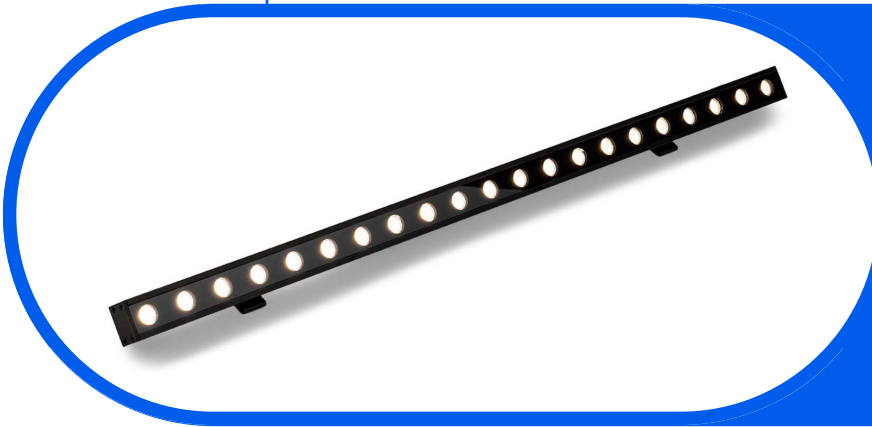

# Zolo™ 3 Static White

Ultra-Thin LED Washer/Grazer



### Specifications

Category	Fixture
Series	Zolo 3
Family	Static White
Watts per Foot	6 W/ft
IP Rating	IP20
CRI	85
CCT Options	2700K, 3000K, 3500K, 4000K
Input Voltage	24V DC
Max Run Length	15ft (4.6m)
Beam Angle	15°, 15°x30°, 20°, 30°, 20x40°, 60°, 80°
Lumens per Foot	540 lm/ft
Storage Temp.	-4°F (-20°C) to 140°F (60°C)
Operating Temp.	-40°F (-40°C) to 140°F (60°C)
Dimming Options	Dimming Available (Consult Factory for options)




### Features

- Multiple Optics Options Available
- Extruded Aluminum Alloy Housing
- Available in Titanium Gray, Black, or White Finish
- Multi-Volt 24VDC Remote Driver (Sold Separately)
- Daisy Chain Multiple Fixtures
- Optional Glare Control Accessories
- Louver Options Available

### Description

Zolo 3 is an interior washer/grazer with a small form factor, great light output, and is highly customizable to perfectly fit your project.

### Dimensions



Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.  
Conforms to ANSI/UL Standard 2108  
Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_



# Product Code Builder

## Zolo 3 Static White

### Product Code Builder

Example: Z3-1-6W-27-20-S1-TG-NA



<sup>1</sup>Other options available, consult factory.

#### MOUNTING

##### 1" Stand Off



S1

##### Mounting Clip



CP

#### FINISH

##### Titanium Grey

RAL 9006

TG

##### Black

RAL 9011

BK

##### White

RAL 9001

WH

#### OPTIONS

##### Solid Glare Shield



GS

##### Louver



LV

##### Asymmetric Louver



ALV

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.

Conforms to ANSI/UL Standard 2108

Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_



# Optional Accessories

## Zolo 3 Static White

### Mounting

#### TYPE


##### 1" Stand Off



#### DESCRIPTION

S1	
<b>Width</b>	1.25in (32.0mm)
<b>Length</b>	0.70in (18.0mm)
<b>Height w/ Product</b>	1.88in (47.75mm)
<b>Stand Off Height</b>	1.06in (27.0mm)
<b>Rotation</b>	70°


#### DIMENSIONS



##### 3" Stand Off




S3	
<b>Width</b>	1.25in (32.0mm)
<b>Length</b>	0.70in (18.0mm)
<b>Height w/ Product</b>	3.66in (93.00mm)
<b>Stand Off Height</b>	2.83in (72.0mm)
<b>Rotation</b>	90°

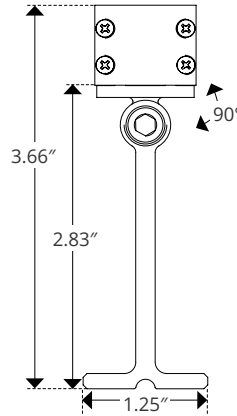

##### Mounting Clip



CP	
<b>Width</b>	1.29in (33.0mm)
<b>Length</b>	0.79in (20.0mm)
<b>Height w/ Product</b>	1.29in (33.0mm)
<b>Clip Height</b>	1.18in (30.0mm)
<b>Stand Off Height</b>	0.45" (11.5mm)





# Optional Accessories

## Zolo 3 Static White

### Options

#### TYPE

##### Solid Glare Shield




#### DESCRIPTION

— **GS** —

<b>Width</b>	1.02in (26.0mm)
<b>Height w/ Product</b>	1.46in (37.0mm)
<b>Shield Height</b>	0.63in (16.0mm)

#### DIMENSIONS




##### Louver



— **LV** —

<b>Width</b>	1.20in (30.5mm)
<b>Stand Off Height</b>	0.51in (13.0mm)
<b>Height w Product</b>	1.34in (34.0mm)
<b>Height</b>	1.04in (26.5mm)




##### Asymmetric Louver



— **ALV** —

<b>Width</b>	1.20in (30.5mm)
<b>Stand Off Height</b>	0.51in (13.0mm)
<b>Height w Product</b>	1.34in (34.0mm)
<b>Height</b>	1.04in (26.5mm)





# Power and Connector Details

## Zolo 3 Static White

### Connectors

#### TYPE


##### Connector



#### DESCRIPTION

Order Code	Length
Z-03-FML-6	6ft (1.8M)
Z-03-FML-20	20ft (6M)
Z-03-FML-50	50ft (15.2M)

#### WIRING GUIDE



##### Connector



Order Code	Length
Z-03-FMC-1	1ft (0.30M)
Z-03-FMC-2	2ft (0.61M)
Z-03-FMC-6	6ft (1.8M)



Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.  
 Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type \_\_\_\_\_

Project Name \_\_\_\_\_

Location \_\_\_\_\_