



Complete Specification Sheet

Zolo 7 Static White

ZOLO



Zolo™ 7 Static White

Indoor / Outdoor LED Washer / Grazer



Specifications

Category	Fixture
Series	Zolo 7
Family	Static White
Watts per Foot	11 W/ft
IP Rating	IP66
CRI	80
CCT Options	2700K, 3000K, 3500K, 4000K
Input Voltage	24V DC
Max Run Length	8ft (2.4m)
Beam Angle	10°×50°, 25°×40°, 15°, 30°
Lumens per Foot	900 lm/ft
Storage Temp.	-22°F (-30°C) to 140°F (60°C)
Operating Temp.	-40°F (-40°C) to 140°F (60°C)
Dimming Options	Dimming Available (Consult Factory for options)


Features

- High Purity Tempered Glass
- Multiple Optics Options Available
- Extruded Aluminum Alloy Housing
- Available in Titanium Gray, Black, or White Finish
- Multi-Volt 24VDC Remote Driver (Sold Separately)
- Daisy Chain Multiple Fixtures
- Optional Glare Control Accessories
- Louver Options Available

Description

Zolo 7 is our brightest indoor/outdoor rated washer/grazer. While remaining slim, Zolo 7 offers 900 lumens a foot! With multiple beam angles, kelvin temperatures, colors, and accessories Zolo 7 can light any project.

Dimensions

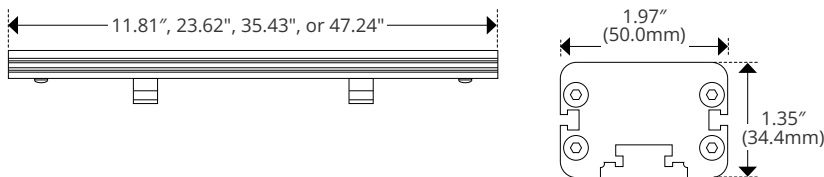

Kelvin reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvin installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____

Location _____




Product Code Builder

Zolo 7 Static White

Product Code Builder

Example: Z7-1-11W-27-15-S2-TG-NA

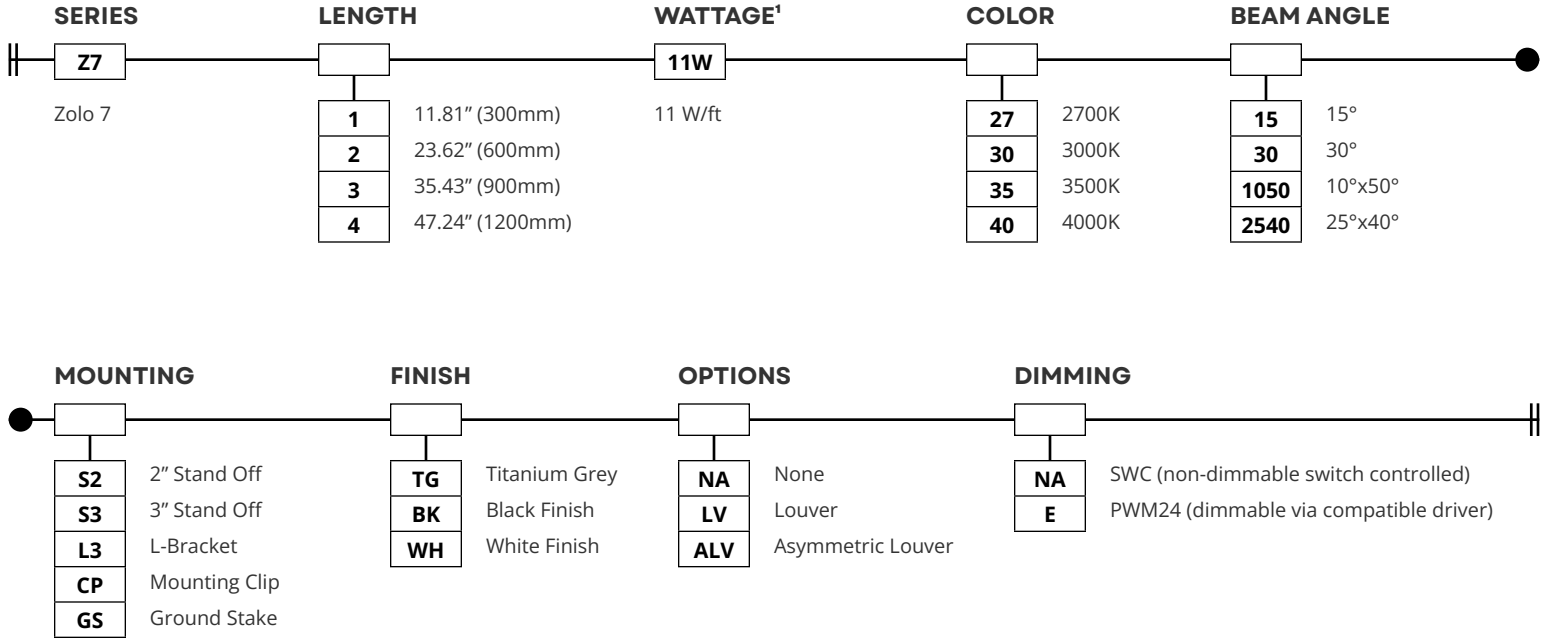

¹Other options available, consult factory.

MOUNTING

2" Stand Off



S2

Mounting Clip



CP

3" Stand Off



S3

Ground Stake



GS

L-Bracket



L3

FINISH

Titanium Grey

RAL 9006

TG

Black

RAL 9011

BK

White

RAL 9001

WH

OPTIONS

Louver



LV

Asymmetric Louver



ALV

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____

Project Name _____











Location _____



Mounting Details

Zolo 7 Static White

Mounting

TYPE	DESCRIPTION	DIMENSIONS										
2" Stand Off 	S2 <table border="1"> <tr><td>Width</td><td>2.36in (60.0mm)</td></tr> <tr><td>Length</td><td>1.18in (30.0mm)</td></tr> <tr><td>Height w/ Product</td><td>3.22in (81.78mm)</td></tr> <tr><td>Stand Off Height</td><td>1.87" (47.4mm)</td></tr> <tr><td>Rotation</td><td>90°</td></tr> </table>	Width	2.36in (60.0mm)	Length	1.18in (30.0mm)	Height w/ Product	3.22in (81.78mm)	Stand Off Height	1.87" (47.4mm)	Rotation	90°	
Width	2.36in (60.0mm)											
Length	1.18in (30.0mm)											
Height w/ Product	3.22in (81.78mm)											
Stand Off Height	1.87" (47.4mm)											
Rotation	90°											
3" Stand Off 	S3 <table border="1"> <tr><td>Width</td><td>2.36in (60.0mm)</td></tr> <tr><td>Length</td><td>1.18in (30.0mm)</td></tr> <tr><td>Height w/ Product</td><td>3.99in (101.35mm)</td></tr> <tr><td>Stand Off Height</td><td>2.63in (66.9mm)</td></tr> <tr><td>Rotation</td><td>105°</td></tr> </table>	Width	2.36in (60.0mm)	Length	1.18in (30.0mm)	Height w/ Product	3.99in (101.35mm)	Stand Off Height	2.63in (66.9mm)	Rotation	105°	
Width	2.36in (60.0mm)											
Length	1.18in (30.0mm)											
Height w/ Product	3.99in (101.35mm)											
Stand Off Height	2.63in (66.9mm)											
Rotation	105°											
L-Bracket 	L3 <table border="1"> <tr><td>Width</td><td>2.36in (60.0mm)</td></tr> <tr><td>Length</td><td>1.18in (30.0mm)</td></tr> <tr><td>Height w/ Product</td><td>4.03in (102.36mm)</td></tr> <tr><td>Stand Off Height</td><td>2.67in (67.9mm)</td></tr> <tr><td>Rotation</td><td>110°</td></tr> </table>	Width	2.36in (60.0mm)	Length	1.18in (30.0mm)	Height w/ Product	4.03in (102.36mm)	Stand Off Height	2.67in (67.9mm)	Rotation	110°	
Width	2.36in (60.0mm)											
Length	1.18in (30.0mm)											
Height w/ Product	4.03in (102.36mm)											
Stand Off Height	2.67in (67.9mm)											
Rotation	110°											
Mounting Clip 	CP <table border="1"> <tr><td>Width</td><td>2.20in (55.88mm)</td></tr> <tr><td>Length</td><td>0.98in (25.0mm)</td></tr> <tr><td>Height w/ Product</td><td>2.02in (51.31mm)</td></tr> <tr><td>Stand Off Height</td><td>0.67in (17.0mm)</td></tr> </table>	Width	2.20in (55.88mm)	Length	0.98in (25.0mm)	Height w/ Product	2.02in (51.31mm)	Stand Off Height	0.67in (17.0mm)			
Width	2.20in (55.88mm)											
Length	0.98in (25.0mm)											
Height w/ Product	2.02in (51.31mm)											
Stand Off Height	0.67in (17.0mm)											
Ground Stake 	GS <table border="1"> <tr><td>Diameter (Width)</td><td>ø2.05in (52.1mm)</td></tr> <tr><td>Diameter (Length)</td><td>ø2.05in (52.1mm)</td></tr> <tr><td>Height</td><td>9.64in (244.8mm)</td></tr> <tr><td>Height w/ Product</td><td>11.0in (279.4mm)</td></tr> <tr><td>Rotation</td><td>70°</td></tr> </table>	Diameter (Width)	ø2.05in (52.1mm)	Diameter (Length)	ø2.05in (52.1mm)	Height	9.64in (244.8mm)	Height w/ Product	11.0in (279.4mm)	Rotation	70°	
Diameter (Width)	ø2.05in (52.1mm)											
Diameter (Length)	ø2.05in (52.1mm)											
Height	9.64in (244.8mm)											
Height w/ Product	11.0in (279.4mm)											
Rotation	70°											

Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____
 Project Name _____
 Location _____



Optional Accessories

Zolo 7 Static White

Options

TYPE

Louwer




DESCRIPTION



Width	2.14in (54.0mm)
Stand Off Height	0.79in (20.0mm)
Height	1.29in (33.0mm)
Height w Product	2.14in (54.0mm)


DIMENSIONS

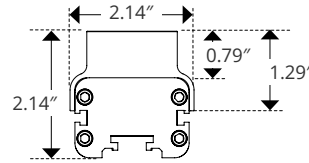

Asymmetric Louwer



Width	2.14in (54.0mm)
Stand Off Height	0.79in (20.0mm)
Height	1.29in (33.0mm)
Height w Product	2.14in (54.0mm)

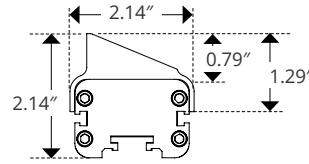



Power and Connector Details

Zolo 7 Static White

Connectors

TYPE


Connector



DESCRIPTION

Order Code	Length
Z-57-FML-6	6ft (1.8M)
Z-57-FML-20	20ft (6M)
Z-57-FML-50	50ft (15.2M)

WIRING GUIDE



Connector




Order Code	Length
Z-57-FMC-1	1ft (0.30M)
Z-57-FMC-2	2ft (0.61M)
Z-57-FMC-6	6ft (1.8M)



End Cap



Order Code
Z-57-EC



Kelvix reserves the right to update the product specifications at any time. To maintain warranty, field modifications must follow approved Kelvix installation instruction.
 Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.2

Fixture Type _____
 Project Name _____
 Location _____