



Easy-Spec™ Linear LED Strip

Installation Instructions

⚠ SAFETY PRECAUTIONS

The mounting means provided with this luminaire has not been evaluated for reliability. If installed where failure of the mounting could cause injury to persons or damage to property below, supplemental means of securement should be considered.

Products should be installed and serviced by a qualified, licensed electrician in accordance with applicable local and national electrical safety codes.

Never install within 10 ft or less from the nearest edge of a pool, spa, fountain, or similar location.

Never use currents or voltages that are not compatible.

Never modify or take apart Kelvix components beyond instructions or the warranty will be void.

Connect power feed to appropriate power source or controls.

Ensure all electrical connections are insulated and secure before applying power.

Remove from power source immediately if any damage is found in the LED strip or cabling.


Do Not Field Cut outdoor LED Strip.

Do Not Power on LED Strip Until Entire Strip Is Removed From Reel.


Do Not Fold, Crease, Twist, or Bend LED Strip at Sharp Angles.

Refer to Wattage Chart to Ensure LED Strip Length Is Suitable for Power Supply.


- 1 | Prepare mounting surface by removing any dirt, debris, or moisture.

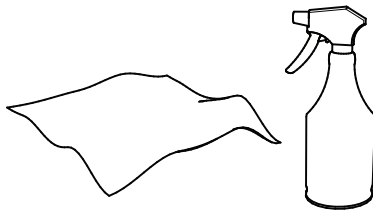


- 2 | If necessary you can cut INDOOR LED strip to desired length at indicated cut intervals.

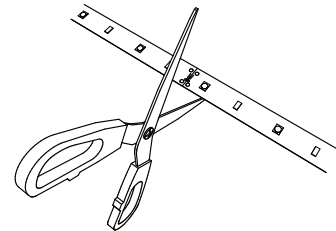

- 3 | Ensure that LED strip is correctly oriented with power feed end toward power source.

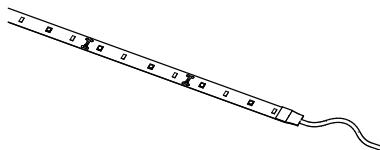

- 4 | Begin peeling back 3M™ adhesive backing and adhering LED strip to smooth, clean, non-porous mounting surface only!

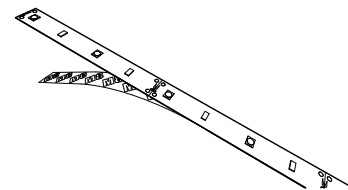

- 5 | Gently go back and press down along entire strip to remove any air pockets and secure into position.

