



Linear LED

Installation Instructions

⚠ SAFETY PRECAUTIONS



- Do not field cut outdoor LED Strip unless water-tight seal can be added.
- Do not power on LED Strip until entire tape is removed from reel.
- Do not cut LED Strip with power connected.
- Do not fold, crease, twist, or bend LED Strip at sharp angles.
- Connect power feed to appropriate power source or controls.
- Ensure power supply voltage is compatible with tape product.
- Refer to Power Chart to ensure LED Strip length is suitable for power supply.

⚠ FOR ALL LINEAR LED TAPES



- Install instructions are for both COB and Non-COB Strips
- Specific COB instructions will be noted as such, otherwise, instructions work for both COB and Non-COB

ALL LINEAR LED:


TWO PEOPLE REQUIRED
When installing, apply tape to the mounting surface at an angle no greater than 40°. Depending on the installation, two people may be needed: one to install the tape into the channel and the other to assist by carrying the product, ensuring the tape maintains the 40° bending angle.

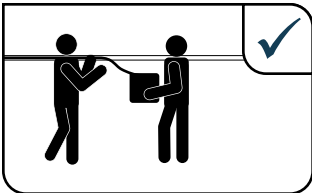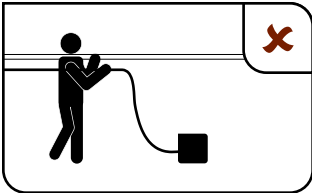

AVOID RIPPLES & OVERBENDING
When removing the protective liner and applying the tape to the surface, ensure that tape is installed without any ripples or creases.




INSTALL VIDEO
Watch installation video for non-COB Linear LED Products

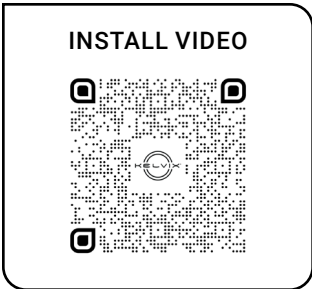

COB SPECIFIC:

DO NOT TOUCH SILVER SIDES
When handling with power connected, avoid contact between the silver conductive sides of the COB strip as this may cause electrical shortage.

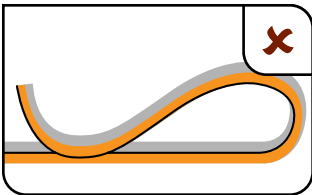





Linear LED

Indoor Installation Instructions


- 1 Prepare mounting surface by removing any dirt, debris, or moisture.

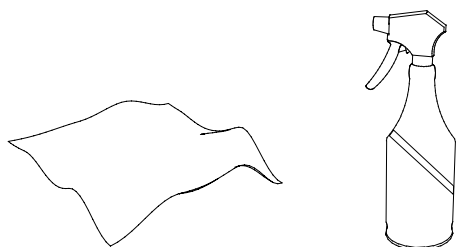


- 2 If necessary, cut LED strip to desired length at indicated cut intervals. COB Linear can be cut at any interval.

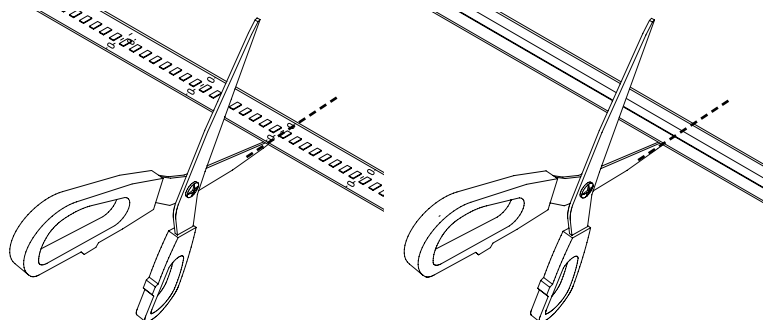


- 3 Ensure power feed on LED strip is oriented toward power source.

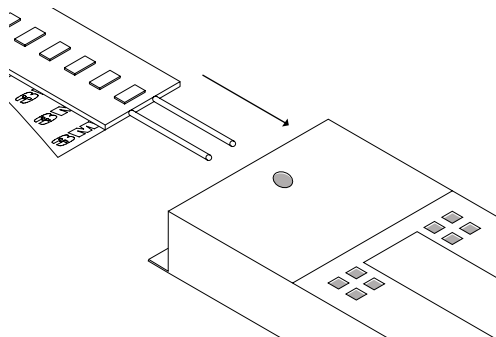

- 4 Begin peeling back protective liner to expose adhesive. Adhere LED strip to cleaned smooth, non-porous mounting surface by removing the liner in short increments.

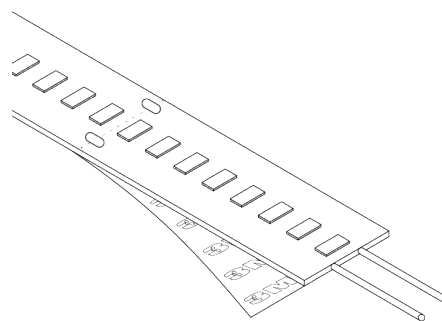

- 5 Go back and gently press down along entire strip to ensure firm adhesion and no air pockets.

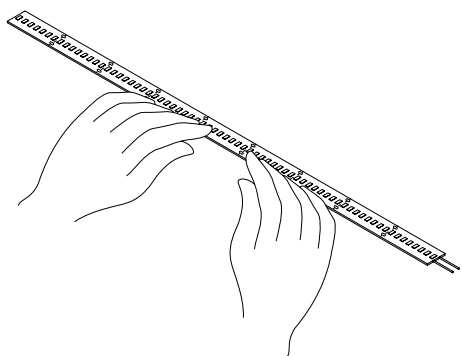





Linear LED

Outdoor Installation Instructions


- 1 Prepare mounting surface by removing any dirt, debris, or moisture.

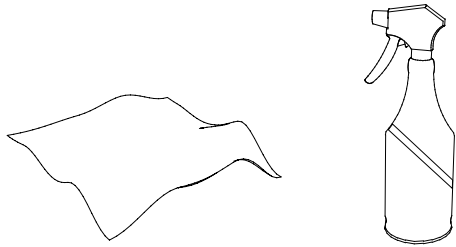


- 2 If necessary, cut LED strip to desired length at indicated cut intervals. COB Linear can be cut at any interval.

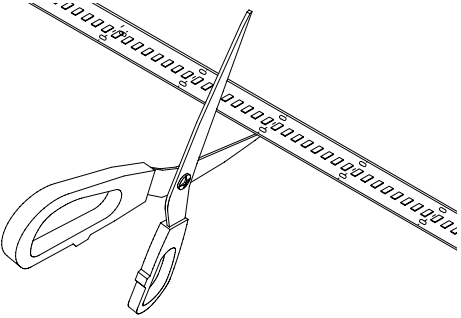

- 3 To ensure the water tight cap comes into direct contact with the LED strip, Slice and remove $\frac{5}{8}$ " of the protective liner. Any protective liner remaining inside the cap can prevent a water-tight seal.

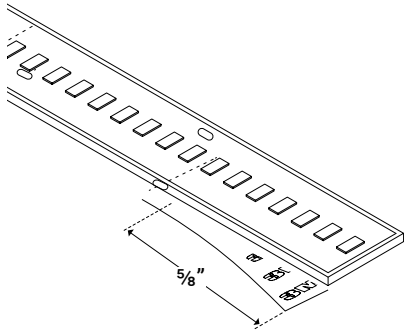

- 4 Apply a small bead of silicone sealant all the way around the tape near the cut end. Ensure silicone does not ingress into freshly cut tape edge or discoloring can occur.

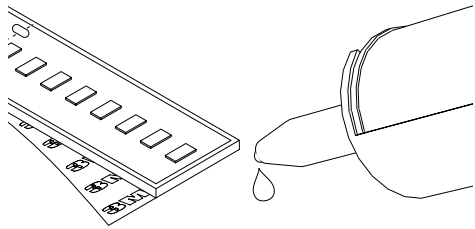





Linear LED

Outdoor Installation Instructions


- 5 | Install water-tight end cap. Wipe off excess silicone and wait a minimum of 20-30 minutes for silicone to set before handling strip.

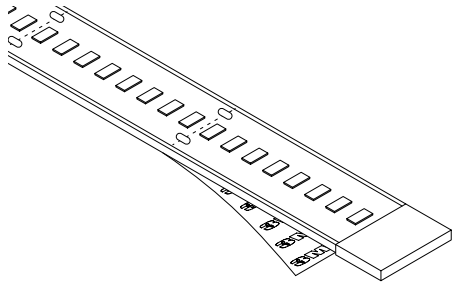

- 6 | Ensure power feed on LED strip is oriented toward power source.

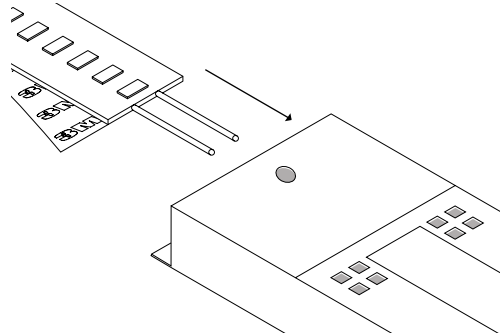

- 7 | Begin peeling back protective liner to expose adhesive. Adhere LED strip to cleaned smooth, non-porous mounting surface by removing liner in short increments.

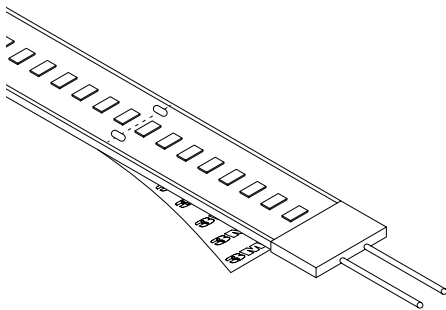

- 8 | Go back and gently press down along entire strip to ensure firm adhesion and no air pockets.

