



# Recessed Spring Clip Mount

## Installation Instructions

### ⚠ SAFETY PRECAUTIONS

The mounting means provided with this luminaire has not been evaluated for reliability. If installed where failure of the mounting could cause injury to persons or damage to property below, supplemental means of securement should be considered.

Products should be installed and serviced by a qualified, licensed electrician in accordance with applicable local and national electrical safety codes.

Never install within 10 ft or less from the nearest edge of a pool, spa, fountain, or similar location.

Never use currents or voltages that are not compatible.


Never modify or take apart Kelvix components beyond instructions or the warranty will be void.

Connect power feed to appropriate power source or controls.


Ensure all electrical connections are insulated and secure before applying power.

Remove from power source immediately if any damage is found in the LED strip or cabling.


- 1 | Create recessed opening in mounting surface.

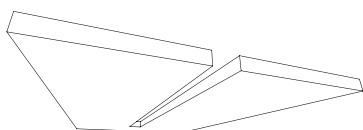


- 2 | Insert lens into channel, measure, and cut to length.

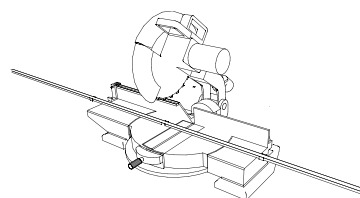


- 3 | Remove lens cover, feed spring clips through back of channel, and tighten set screws.

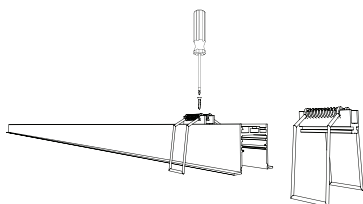

- 4 | Attach end caps and install LED strip into channel.

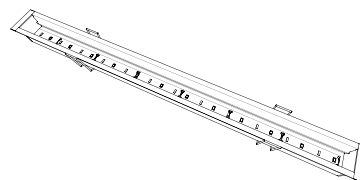

- 5 | Insert channel into opening with spring clips compressed and then allow clips to release and clasp surface.

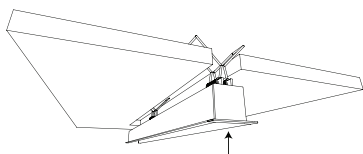

- 6 | Attach lens cover.

